


\*\* Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2661666611	~

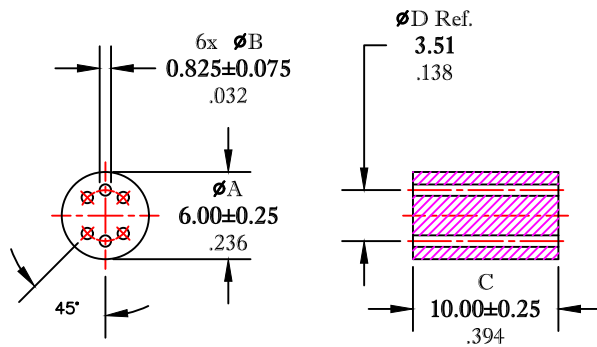


DIMENSIONS  
**BOLD NUMBERS ARE IN MILLIMETERS**  
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS

Impedance (Ohms)		
50 MHz	100 MHz	200 MHz
224 Min.	304 Min.	408 Min.

IMPEDANCE MEASURED ON A HP4191A USING A HP16092A, AS SHOWN BELOW WITH FIXTURE COMPENSATION



NOTES:

- 1- CHIPS, CRACKS, AND APPEARANCE TO MEET FAIR-RITE VISUAL INSPECTION CRITERIA FOR MULTI-HOLE WOUND BEADS.
- 2 - BURNISH TO BREAK SHARP EDGES.
- 3 - RESISTIVITY  $> 1 \times 10^6$  Ohms-cm Min., RDC @ 10VDC ACROSS "C" DIMENSION  $> 4 \times 10^6$  Ohms.
- 4 - PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55, FOR THERMAL SHOCK RESISTANCE.

FR# 61

<b>FAIR-RITE PRODUCTS CORP.</b>					
TITLE					
WOUND BEAD BLANK					
DRAWN BY J.SERENCSCS	DATE 06-29-2018	SIZE	PART NO.	REV.	
CHKD BY		B	2661666611	~	
APPRVD BY		SCALE	NONE	SHEET 1 of 1	