



Cable entry with injected seal, Mounting type: Screws, Length: 73 mm, Width: 39 mm, IP 66, Colour: Black

RAL: 9005

Kaufmännische Daten

Artikelnummer	28700.4
Artikelbezeichnung	KDS-SR-FB1/A BK
GTIN (EAN)	4044211225476
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	28.2 g
Weight per piece (including packaging)	31.7 g
Unit of weight	G
Customs number	39259020
Country of origin	DE
Product description	Cable Entry
Colour	Black

### Technische Daten

#### Dimensions

Length	73 mm
Length of wall cutout	46 mm
Width	39 mm
Width of wall cutout	24 mm
Height	19 mm
Installation height	18.9 mm
Diameter of the screw holes	5.5 mm

#### Materials

Material	Polyamide 6.6
Glass-fibre reinforced	✓
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C
Sealing material	TPE
Halogen-free	✓
Silicone-free	✓


#### Further technical data

Mounting type	Screws
Degree of protection	IP66
Number of screw holes	2
Fixing screws	M 5 (ISO 4762 / DIN 912)
Torque of the fixing screws	3 Nm

#### Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

### Medien

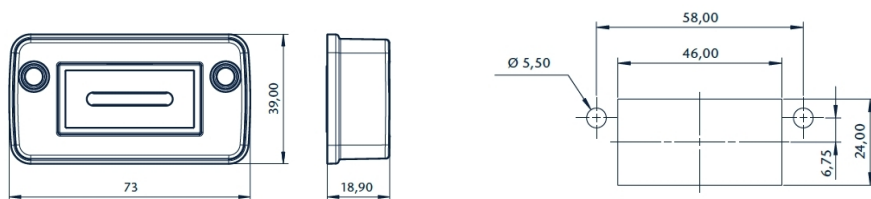

## 28700.4 KDS-SR-FB1/A BK

### Zubehör

#### Flat cable seals



Seal, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28717.6</u>	KDS-DE-FB1/E GR	4044211221102	5 ST



Seal, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28718.6</u>	KDS-DE-FB1/F GR	4044211221119	5 ST



Seal dummy, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28713.6</u>	KDS-DE-FB1/A GR	4044211221065	5 ST



Seal, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28714.6</u>	KDS-DE-FB1/B GR	4044211221072	5 ST



Seal, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28715.6</u>	KDS-DE-FB1/C GR	4044211221089	5 ST



Seal, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28716.6</u>	KDS-DE-FB1/D GR	4044211221096	5 ST

#### Actuating tool

## 28700.4 KDS-SR-FB1/A BK



Using the KDS BW1 actuating tool, the seals can be conveniently mounted in and dismantled from the frame. The ergonomic grip and the special shape enable simple and precise installations, especially for cabling applications in confined spaces., Material: Polyamide

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28622.0</u>	KDS BW 1	4044211216597	1 ST

### Sheet-metal puncher



Sheet metal puncher for rectangular openings, Dimensions opening: 46 x 24 mm, Maximum wall thickness: 2.0 mm for stainless steel sheet, Material: steel

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28734.0</u>	BL KDS-FB1	4044211221805	1 ST



Sheet metal puncher for rectangular openings, Dimensions opening: 46 x 24 mm, Maximum wall thickness: 2.0 mm for stainless steel sheet, Material: steel

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28729.0</u>	BL-VA KDS-FB1	4044211221768	1 ST

### EMC brackets



Shield-connection rail enabling mounting of shield connection clips directly on cable entry system KDS, Mounting type: Screw, Length: 35,3 mm, Width: 68 mm, Height: 16 mm, Profile: 10x3 mm

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28623.0</u>	KDS-EMV-SAB 1-4	4044211219628	1 ST

### ##INVERSE##CONTA-CABLE



Seal, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28716.6</u>	KDS-DE-FB1/D GR	4044211221096	5 ST