



Cable entry with injected seal, Mounting type: Screws, Length: 98 mm, Width: 39 mm, IP 66, Colour: Black

RAL: 9005

Kaufmännische Daten

Artikelnummer	28701.4
Artikelbezeichnung	KDS-SR-FB2/A BK
GTIN (EAN)	4044211225483
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	35.3 g
Weight per piece (including packaging)	40.31 g
Unit of weight	G
Customs number	39259020
Country of origin	DE
Product description	Cable Entry
Colour	Black

Technische Daten

Dimensions

Length	98 mm
Length of wall cutout	68 mm
Width	39 mm
Width of wall cutout	24 mm
Height	19 mm
Installation height	18.9 mm
Diameter of the screw holes	5.5 mm

Materials

Material	Polyamide 6.6
Glass-fibre reinforced	✓
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C
Sealing material	TPE
Halogen-free	✓
Silicone-free	✓


Further technical data

Mounting type	Screws
Degree of protection	IP66
Number of screw holes	2
Fixing screws	M 5 (ISO 4762 / DIN 912)
Torque of the fixing screws	3 Nm

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

Medien

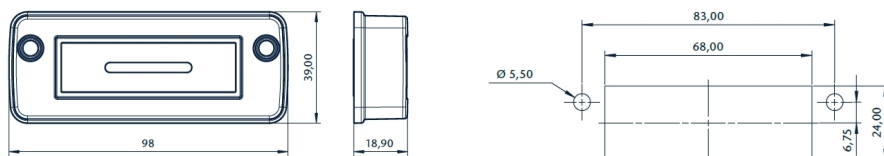

Zubehör

Actuating tool



Using the KDS BW1 actuating tool, the seals can be conveniently mounted in and dismantled from the frame. The ergonomic grip and the special shape enable simple and precise installations, especially for cabling applications in confined spaces., Material: Polyamide

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28622.0</u>	KDS BW 1	4044211216597	1 ST

Sheet-metal puncher



Sheet metal puncher for rectangular openings, Dimensions opening: 68 x 24 mm, Maximum wall thickness: 2.0 mm for stainless steel sheet, Material: steel

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28735.0</u>	BL KDS-FB2	4044211221812	1 ST



Sheet metal puncher for rectangular openings, Dimensions opening: 68 x 24 mm, Maximum wall thickness: 2.0 mm for stainless steel sheet, Material: steel

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28741.0</u>	BL-VA KDS-FB2	4044211221959	1 ST

Flat cable seals



Seal dummy, Mounting type: Plug in, Length 65.2mm, Width: 20.3 mm, IP 66, Colour: Grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28719.6</u>	KDS-DE-FB2/A GR	4044211221126	5 ST



Seal, Mounting type: Plug in, Length 65.2 mm, Width: 20.3 mm, IP 66, Colour: Grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28720.6</u>	KDS-DE-FB2/B GR	4044211221133	5 ST

Flat cable seals



Seal, Mounting type: Plug in, Length 65.2 mm, Width: 20.3 mm, IP 66, Colour: Grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28721.6</u>	KDS-DE-FB2/C GR	4044211221140	5 ST



Seal, Mounting type: Plug in, Length 65.2 mm, Width: 20.3 mm, IP 66, Colour: Grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28722.6</u>	KDS-DE-FB2/D GR	4044211221157	5 ST



Seal, Mounting type: Plug in, Length 65.2 mm, Width: 20.3 mm, IP 66, Colour: Grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28723.6</u>	KDS-DE-FB2/E GR	4044211221164	5 ST



Seal, Mounting type: Plug in, Length 65.2 mm, Width: 20.3 mm, IP 66, Colour: Grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>28724.6</u>	KDS-DE-FB2/F GR	4044211221171	5 ST