
## PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION									
REV	DESCRIPTION	DATE	APPROVED						
A	INITIAL RELEASE, RFS. 25264, EM	10/23/13	HM						
В	CHANGE CABLE TO VCTF 3x2.0mm², 15A RATING, RFS. 25276, EM	11/01/13	HM						
С	ADD BSMI MARKING TO END 'A' AND 'B', RFS. 27467	12/04/19	MK						
C1	ADD THE DESIGNATION YC-12 FOR END "B" TERMINATION, REV119929, BS	10/13/21	MK						

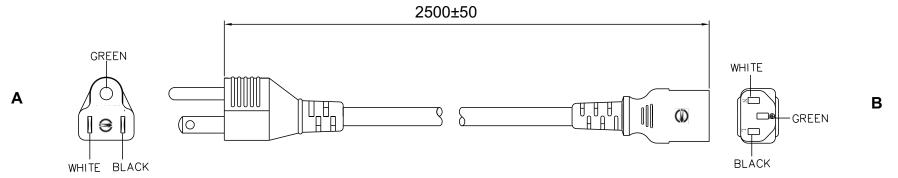

DASH

## **GENERAL SPECIFICATIONS:**

RATING: 15A / 125V AC CABLE TYPE / SIZE: VCTF 3x2.0mm<sup>2</sup>

TEMPERATURE RATING: 60° C

CONDUCTOR COLORS: BLACK / WHITE / GREEN

CABLE JACKET COLOR: **BLACK** 

OVERALL LENGTH (L): 2500 + 50 mm  $7.8 \pm 0.1 \, \text{mm}$ CABLE OUTER DIAMETER:

5-15P, BSMI, YP-12 END 'A' TERMINATION: END 'B' TERMINATION: IEC 320 / C13, YC-12


APPROVALS PLUG: BSMI APPROVALS CABLE: **BSMI** APPROVALS CONNECTOR: **BSMI** 

## **PACKING:**

**HANKING** 

L = 230 + 10 mm

MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.





## NOTES:

Contents of this document

prior notice

1. CORD. PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair are subject to change without occurs. End user should consult the applicable UL,CSA or EN Standards for proper


installation instruction.

Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

	NO.	I PARTNO I REV I DESCRIPTION						NOTES	
				DECIMALS .xx +/- 0.1 .xxx +/005	ANCES: ANGULAR +/- 1*		GlobTek <sup>®</sup> , Inc.	186 Veterans Dr. No Tel. 201-784-1000	
ız-	INIT.BY:	EM	DATE: 10/24/13	MILLIMETERS .xx +/- 0.3 .xxx +/013	ANGULAR +/- 1°	DWG TIT	TLE: TAIWAN DETACHAI 2.5m, 5-15P TO IEC32	BLE CORDSET, 20/C13	
	DRAWN:	NF	DATE: 10/24/13	FSCN No.: G, CC	SIZE A	MODEL:	N / A		REV. C1
	APRVD:	НМ	DATE: 10/24/13	SCALE: NONE		PART NO	D: 3003322M5701(R)		SHEET 1/2



PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

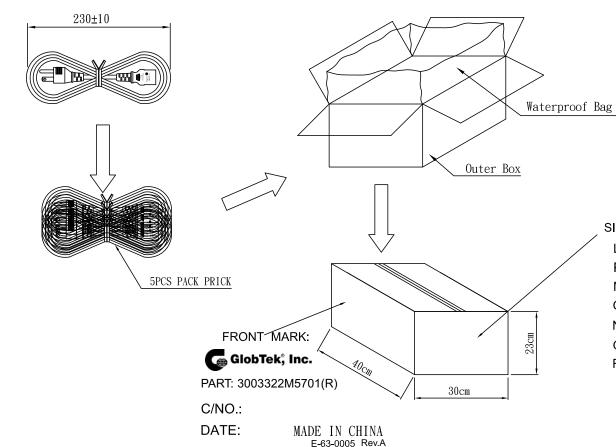

NOTE:

1. 100PCS/CTN, 5PCS PACK PRICK.

2.1PC Waterproof Bag/CTN SIZE:80cmX80cmX0.05mm

3. Outer Box SIZE: (40X30X23)cm

SIDE MARK:

LR#

PART: 3003322M5701(R)

MODEL:POWER CORD

Q'TY: 100 PCS N.W.: 17.0 KGS

G.W.: 17.7 KGS

Recycle Mark

GlobTek, Inc. www.globtek.com

186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111

TAIWAN DETACHABLE CORDSET, 2.5m, 5-15P TO IEC320/C13 DWG TITLE:

REV. N/AMODEL: C1 PART NO: 3003322M5701(R)

SHEET 2/2