




PRINTER

300v1 Direct Thermal

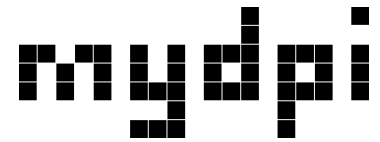

Print small text and crisp barcodes with ease. Powered by design and print software that works on both Windows and macOS. Plug-and-print functionality without installing drivers. Import spreadsheet data and print batches of unique barcoded labels. Label designs can be saved for future use and shared with others. The 300v1 features multiple adjustable sensors that allow for a wide compatibility with direct thermal labels.

MEDIA

Type	Continuous, gap, black mark
Direct Thermal	<input checked="" type="checkbox"/> v-series labels i
Thermal Transfer	<input checked="" type="checkbox"/> see mydpi 300x1 i
Width	0.78" to 4.6" (20 mm to 118 mm)
Length	0.39" to 70" (10 mm to 1778 mm)
Thickness	2.36 mil to 9.8 mil (.06 mm to 0.25 mm)
Inner Diameter Core	1" to 3" (25.4 mm to 76.2 mm)
Outer Diameter	5" (127 mm)

OPERATING

Temperature	41°F to 104°F (5°C to 40°C)
Humidity	25% to 85% non-condensing

STORAGE

Temperature	-40°F to 140°F (-40°C to 60°C)
Humidity	10% to 90% non-condensing

OTHER

Country of Origin	China
More Information	mydpi.com i



mydpi 300v1

SOFTWARE

Label LIVE	Windows 10 or newer, macOS i
Optional Drivers	Windows, macOS

EXTERNAL

Interface	USB 2.0
Width	7.47" (189.62 mm)
Height	7.03" (178.5 mm)
Depth	8.62" (219.03 mm)
Weight	3.48 lb (1.58 kg)

POWER

Input	AC 100~240V
Output	DC 24V, 2.5A, 60W