
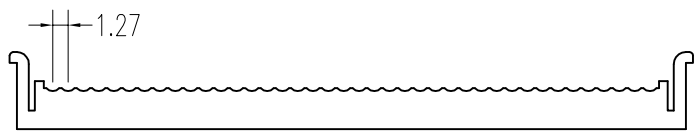

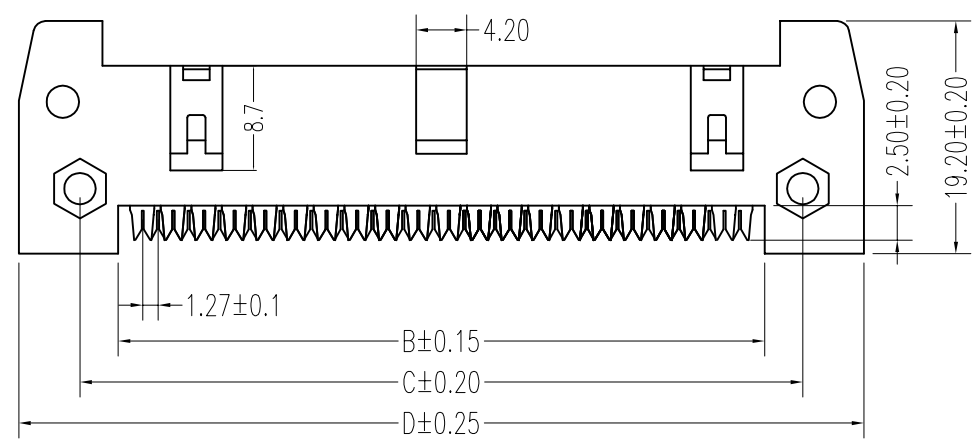


| REV. | DESCRIPTION | DATE       |
|------|-------------|------------|
| A    | RELEASE     | 2019.09.14 |

**MATERIAL&FINISH**  
 Insulator: PBT Glass Fiber(UL94V-0)  
 Contact : Brass  
 Contact-Plating: Flash Gold Over Ni

**SPECIFICATIONS**  
 Current Rating :1A AC,DC  
 Temperature Range:-40°C To+105°C  
 Contact Resistance:20mΩ, MAX  
 Insulation Resistance:1000MΩ Min  
 Withstanding Voltage:500V AC/Min

| NO. | Dim. A | Dim. B | Dim. C | Dim. D |
|-----|--------|--------|--------|--------|
| 10P | 10.16  | 15.36  | 21.86  | 31.96  |
| 14P | 15.24  | 20.44  | 26.94  | 37.04  |
| 16P | 17.78  | 22.98  | 29.48  | 39.58  |
| 20P | 22.86  | 28.06  | 34.56  | 44.66  |
| 24P | 27.94  | 33.14  | 39.64  | 49.74  |
| 26P | 30.48  | 35.68  | 42.18  | 52.28  |
| 30P | 35.56  | 40.76  | 47.26  | 57.36  |
| 34P | 40.64  | 45.84  | 52.34  | 65.55  |
| 40P | 48.26  | 53.66  | 59.96  | 70.18  |
| 50P | 60.96  | 66.36  | 72.66  | 82.88  |
| 60P | 73.66  | 19.04  | 85.36  | 95.58  |
| 64P | 78.74  | 84.14  | 90.44  | 100.58 |

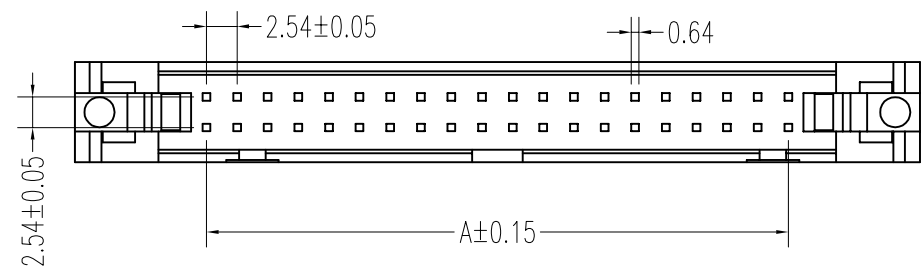

| UNLESS TOLERANCE |              | DRAW BY    | zhan  |      |
|------------------|--------------|------------|-------|------|
| GENERAL          | ANGLE        | DESIGN BY  | 袁刚    |      |
| X. ± 0.30        | X.° ± 3.0°   | CHECK BY   |       |      |
| .X ± 0.25        | .X° ± 2.0°   | APPROVE BY |       |      |
| .XX ± 0.20       | .XX° ± 1.0°  | SCALE      | SHEET | UNIT |
| .XXX ± 0.10      | .XXX° ± 0.5° | 1:1        | 1/1   | MM   |

**CnC Tech,LLC**

Part NO.  
3010-XX-041-11-00

DRW NO: \_\_\_\_\_ REV: A