GlobTek, Inc. www.globtek.com  Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to IEC60320 C13 2 CONDUCTORS + GROUND, GT Cable #106: 18 / 3 Conductors, 7.8mm OD, SJT, 60 Degree, 3  Approvals: UL, CSA or cUL,2440±50mm, GlobTek Black			
	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 3021068F701SW(R)	Rev A	
Fax (201) 784-0111			

## **REVISION HISTORY**

REV	DESCRIPTION	SUB	DATE	APPROVED
Α	Initial release	DR	04/06/2021	DAVID

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification

ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <a href="https://www.globtek.com/iso-certificates/">https://www.globtek.com/iso-certificates/</a> Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

# **Customer Approval of Specification:**

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:

Customer P/N:

Quote Number:

Date:

Authorized Representative Name:

Authorized Representative Signature:

**RELEASED** 

By pudxc at 8:54 am, Apr 21, 2021

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek terms and conditions, which supersede all other agreements, terms, and conditions (<a href="https://en.globtek.com/terms-and-conditions/">https://en.globtek.com/terms-and-conditions/</a>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

### PROPRIETARY INFORMATION

CIODICK, IIIC.	w.globtek.com Approvals: UL, CSA or cUL,2440±50mm, GlobTek Black		
"			
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 3021068F701SW(R)	Rev A	
Fax (201) 784-0111			

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT

ttps://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <a href="https://www.globtek.com/connectors/">https://www.globtek.com/connectors/</a> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE
Footnote:
GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.
Limitation of Use:
GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.  Contents of this document are subject to change without prior notice.


GlobTek, Inc. www.globtek.com	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to IEC60320 C13 2 CONDUCTORS + GROUND, GT Cable #106: 18 / 3 Conductors, 7.8mm OD, SJT, 60 De Approvals: UL, CSA or cUL,2440±50mm, GlobTek Black	egree, 300V, BLK/WHT/GRN,
186 Veterans Drive,	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 3021068F701SW(R)	Rev A
Fax (201) 784-0111		


TENTILE WAT GEOTHET FROM THE FOTONE BELOW DIMENSIONS ARE IN WIM SNEEDS OF ESTIMED STREETWISE
Cordset Information:
CordsetColor:GlobTek Black
Cord Length (mm):2440±50
Cord Length (nim).2440±30
NOTES:
No 126.
SWITCH IS # 303 OR EQUAL, UL,CSA/cUL, RATING 3A/120V

CIOD I CIN, II IO.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to IEC60320 C13 2 CONDUCTORS + GROUND, GT Cable #106: 18 / 3 Conductors, 7.8mm OD, SJT, 60 Degree, 300V, BLK/WHT/GRN, Approvals: UL, CSA or cUL,2440±50mm, GlobTek Black		
1 "	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 3021068F701SW(R)	Rev A	
Fax (201) 784-0111	· · ·		

END B

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <a href="https://www.globtek.com/connectors/">https://www.globtek.com/connectors/</a> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <a href="https://www.globtek.com/connectors/">https://www.globtek.com/connectors/</a> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

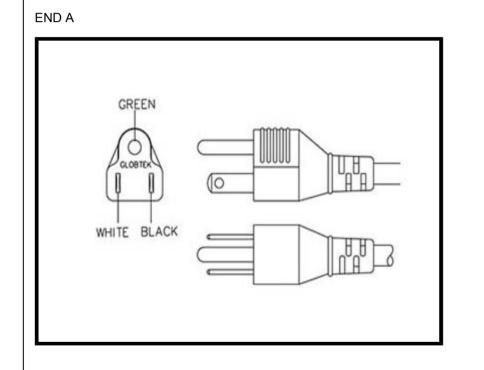

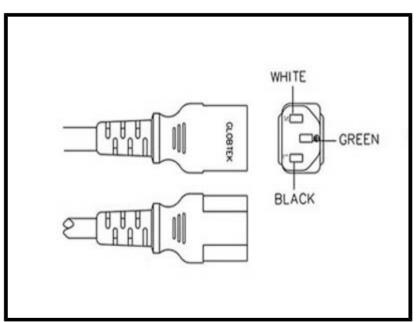

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Wordship Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to IEC60320 C13 2 CONDUCTORS + GROUND, GT Cable #106: 18 / 3 Conductors, 7.8mm OD, SJT, 60 Degree, 300V, BLKW Approvals: UL, CSA or cUL,2440±50mm, GlobTek Black Model No. Power Cord		
Tel. (201) 784-1000	Part No./Ordering No. 3021068F701SW(R)	Rev A
Fax (201) 784-0111		

# CABLE IMAGE 2440±50 WHITE BLACK ROCKER SWITCH BLACK WHITE BLACK ROCKER SWITCH ROCKER SWITCH WHITE BLACK ROCKER SWITCH ROCKER SWITCH BLACK ROCKER SWITCH ROCK

CIODICK, IIIC.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to IEC60320 C13 2 CONDUCTORS + GROUND, GT Cable #106: 18 / 3 Conductors, 7.8mm OD, SJT, 60 Degree, 300V, BLK/WHT/GRN, Approvals: UL, CSA or cUL,2440±50mm, GlobTek Black		
1 "	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 3021068F701SW(R)	Rev A	
Fax (201) 784-0111	-		

End A	Cable	End B
Code:302	Code:106	Code:701
Description:NEMA 5-15P (TYPE B) 2 CONDUCTOR +	Description:GT Cable #106: 18 / 3 Conductors, 7.8mm OD,	Description:IEC60320 C13 2 CONDUCTORS + GROUND
GROUND PLUG	SJT, 60 Degree, 300V, BLK/WHT/GRN, Approvals: UL, CSA	Rating (V):250
Rating (V):125	or cUL	Rating (A):15,0
Rating (A):15,0	Color:GlobTek Black	Gender:Female
Gender:Male	Wire Gauge(AWG):18	Overmolded:Yes
Overmolded:Yes	Cond:3	
	Type:SJT	
	Temperature:60	
	Amps:10	
	Volts:300	
	OD:7.8	
	ConductorsColors:BLK/WHT/GRN	
Overall cable rating:10A / 125V		

# Plug Approvals Cable Approvals Cubus UL/CUL UL 817 LINK TO CERT Cable Approvals Connector Approvals UL/CUL UL/CUL UL 817 LINK TO CERT


## PROPRIETARY INFORMATION

TOIOD FOR, IIIO.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to IEC60320 C13 2 CONDUCTORS + GROUND, GT Cable #106: 18 / 3 Conductors, 7.8mm OD, SJT, 60 Degree, 300V, BLK/WHT/GRN, Approvals: UL, CSA or cUL,2440±50mm, GlobTek Black	
1 "	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 3021068F701SW(R)	Rev A
Fax (201) 784-0111	· · ·	

Hanking:250

Description:250 +/- 30mm

Image:



Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):