
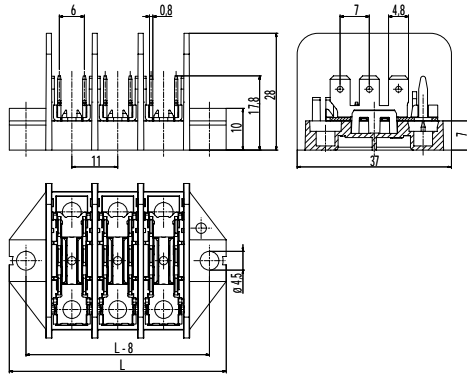


# 308-PA/..-102

Distribution block  
Tab connections 6 x 4,8; vertical

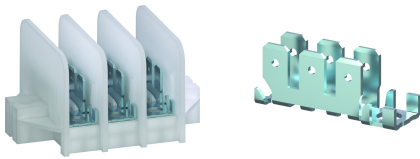

## Part Numbers

No. of poles	308-PA/..-102	Length	PU
1	11.885.102	30	250
2	12.885.102	41	200
3	13.885.102	52	200
4	14.885.102	63	100
5	15.885.102	74	100
6	16.885.102	85	100
7	17.885.102	96	100
8	18.885.102	107	50
10	20.885.102	129	50
12	22.885.102	151	50

further number of poles on request

## General Information

Pitch	11 mm
No. of poles	1 - 16

## Technical Data

Rated Insulation Voltage	450 V acc. to EN 60998-1
Rated Current	acc. to DIN EN 61210: 7,5 A with receptable 4,8; wire 1 mm <sup>2</sup> 12 A with receptable 4,8; wire 1,5 mm <sup>2</sup> 15 A with receptable 4,8; wire 2,5 mm <sup>2</sup>

## Material

Moulding	PA, natural, V-2
Comparative Tracking Index	CTI 250
Insulating Group	IIIa
Temperature Range	RTI Str 90°C
Tab	Zinc plated steel

## Approvals

	Current [A]	Voltage [V]	Group	AWG	[Nm]
cUL <sup>®</sup> US	15	300	B		
	10	300	D		
	Current [A]	Voltage [V]	[mm <sup>2</sup> ]		
DVE	17,5	450	1,5		

## Options / Accessories

- Consecutive numbering
- Special marking according to drawing
- Fixed marking in the tool on request