


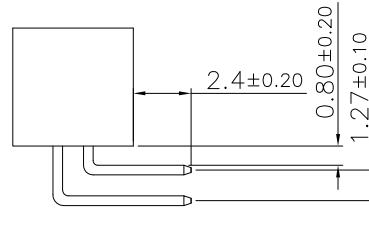


Specifications:  
 Current rating:1.0A AC,DC  
 Voltage rating:50V AC, DC  
 Contact tesistance:20m ohm Max  
 Insulation resistance:1,000M ohm Min  
 Withstanding voltage:500V AC/minute  
 Operating Temperature:-40°C ~ +105°C


Materials:  
 Insulator:Nylon 9T(UL94V-0)  
 Standard Color:Black  
 Terminal:Brass  
 Finish:Gold Plated

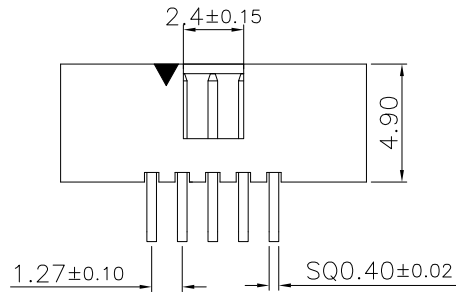

MATING PART  
 3230-XX-0101-00

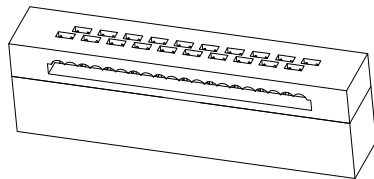

MATING PART  
 3230-XX-0102-00

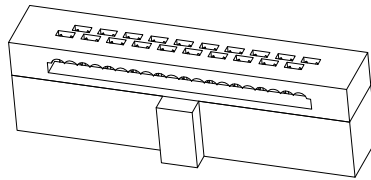

Dimension Information:

Pin.No	Dim.A	Dim.B	Dim.C	Pin.No	Dim.A	Dim.B	Dim.C
8	3.81	9.83	11.43	30	17.78	23.80	25.40
10	5.08	11.10	12.70	34	20.32	26.34	27.94
12	6.35	12.37	13.97	40	24.13	30.15	31.75
14	7.62	13.64	15.24	44	26.67	32.69	34.29
16	8.89	14.91	16.51	50	30.48	36.50	38.10
20	11.43	17.45	19.05	60	36.83	42.85	44.45
24	13.97	19.99	21.59	68	41.91	47.93	49.53
26	15.24	21.26	22.86				

RoHS Compliant

REV	DATE	FILE	BY
	05-FEB-2020		

DRAWN: Jamie	GENERAL TOLERANCE: .X=±0.25 .XX=±0.20
CHECKED: Jerry	
APPROVAL: Rory	UNIT: MM
	SCALE:1:1
	SHEET: 1 / 1
	PROJECTION:

<b>CnC Tech</b> Industrial Cable and Connector Technology	
DESCRIPTION: 1.27mm Box Header Right Angle Type	SIZE A4
PART NO: 3220-10-0200-00	

A  
B  
C  
D