


Data sheet

3236.2 FSLD 2,5 GNYE

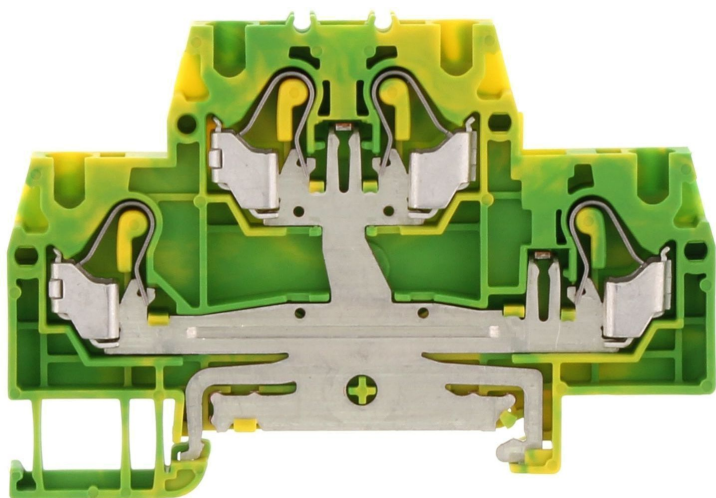

Protective-earth double-level terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Green-yellow

Business data

Article number	3236.2
Article name	FSLD 2,5 GNYE
GTIN (EAN)	4044211130152
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	15.6 g
Weight per piece (including packaging)	16.57 g
Unit of weight	G
Customs number	85369010
Country of origin	BG
Product description	Protective-earth double-level terminal
Colour	Green-yellow

Technical data

Dimensions

Length	75.4 mm
Width	5.1 mm
Height TS 35/7.5	53 mm
Height TS 35 / 7.5 with BA	66 mm

Ratings

Rated cross-section	2.5 mm ²
Overvoltage category	III
Contamination degree	3

Connection data

Connection principle	Push-in connection
Connection position	Top
Connections	4
Number of terminals per level	2
Number of levels	2
Levels internally bridged	✓
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Wire cross-section AWG, min.	26
Wire cross-section AWG, max.	14
Stripping length	12 mm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

Data sheet

3236.2 FSLD 2,5 GNYE



Technical data

Further technical data

Mounting type	Mounting rail TS 35/7,5
Gauge plug acc. to EN 60 947-1	A3
Number of cross-connection channels	2
End plate required	✓

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
EAC approval granted	yes

CSA approval

CSA approval	C22.2 No 158
CSA approval granted	yes
CSA wire cross-section AWG, min.	26
CSA wire cross-section AWG, max.	12




CSAus approval

CSAus approval	UL 1059
CSAus approval granted	yes
CSAus wire cross-section AWG, min.	26
CSAus wire cross-section AWG, max.	12

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2:2009
KEMA KEUR approval granted	yes
KEMA wire cross-section single core (rigid), min.	0.2 mm ²
KEMA wire cross-section single-core (rigid), max.	4 mm ²
KEMA wire cross-section stranded, min.	0.2 mm ²
KEMA wire cross-section stranded, max.	4 mm ²
KEMA wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
KEMA wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²

Media

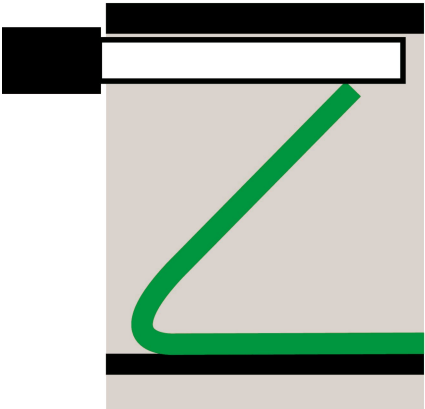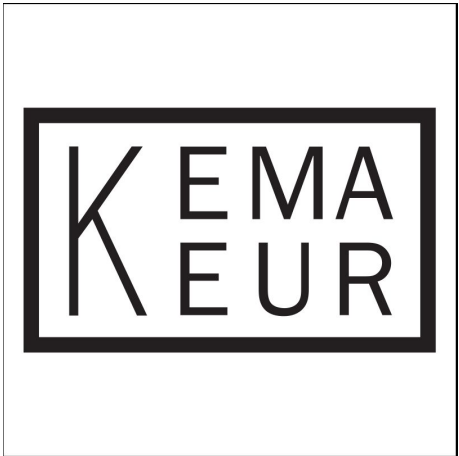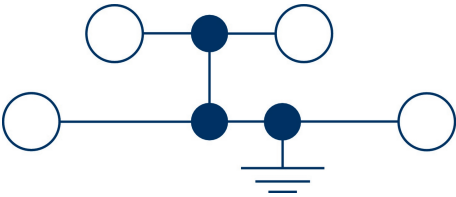

Accessories

End plate



End plate, Width: 1.5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3423.2</u>	FAPD 2,5 BG	4044211130169	20

Identification adapter



Cover, Length: 3.4 mm, Width: 15.7 mm, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3425.8</u>	FAD 1,5/4/B YE	4044211132910	20 ST

End stop



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3811.2</u>	ZES 35/2 BG	4044211080600	50

Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
<u>4600.7</u>	PMC SB 5/50 WH	4044211088903	500 ST

Screwdriver

Data sheet

3236.2 FSLD 2,5 GNYE

Screwdriver with bare blade, Colour:



Article number	Article name	GTIN (EAN)	Packaging unit
<u>3164.0</u>	SDB 0,4x2,0	4044211107246	1 ST

Four-way cover

Cover, Length: 3.4 mm, Width: 19.8 mm, Colour: Yellow



Article number	Article name	GTIN (EAN)	Packaging unit
<u>3426.8</u>	FAD 2,5/4/B YE	4044211132934	20 ST