

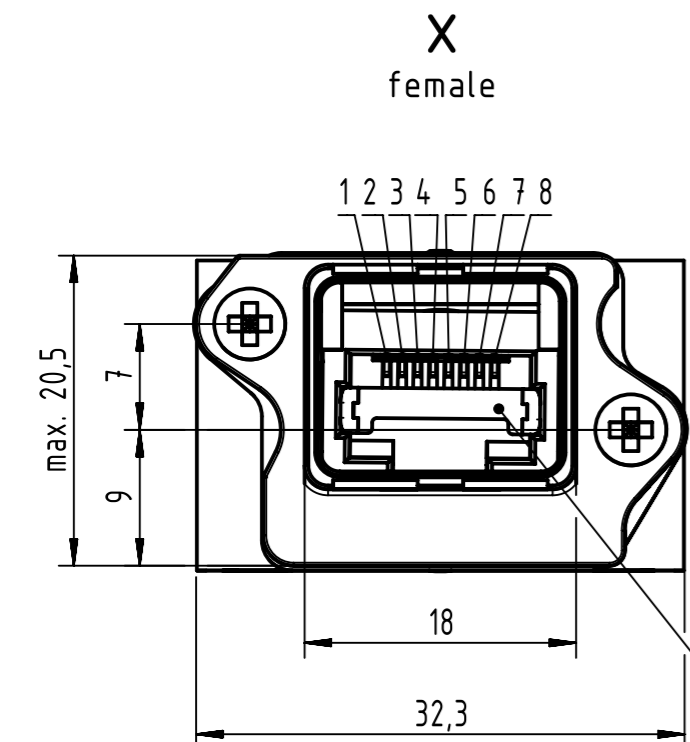


Connector Location A


Connector Location B

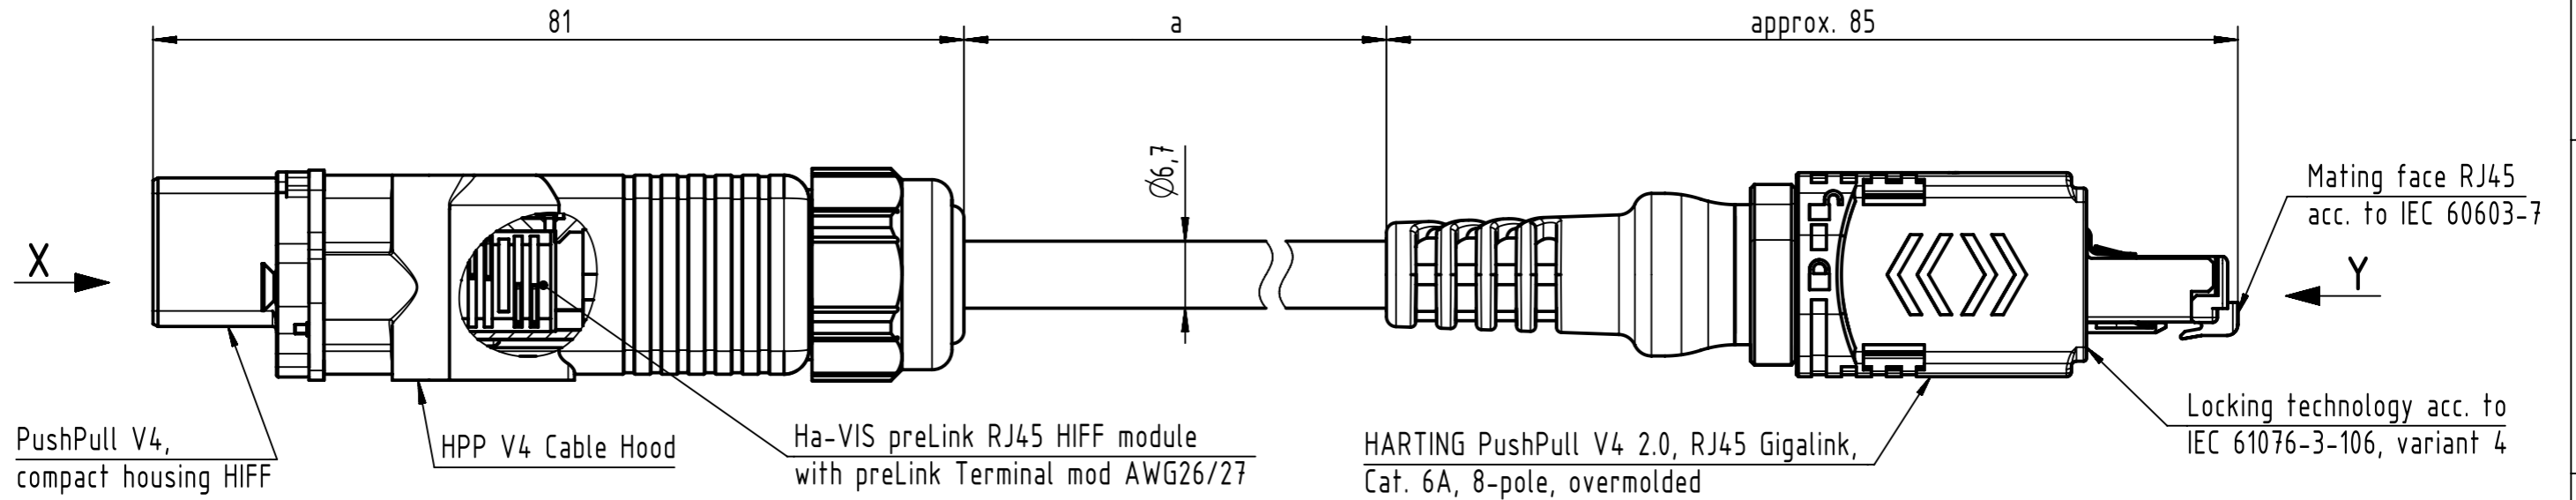


X female

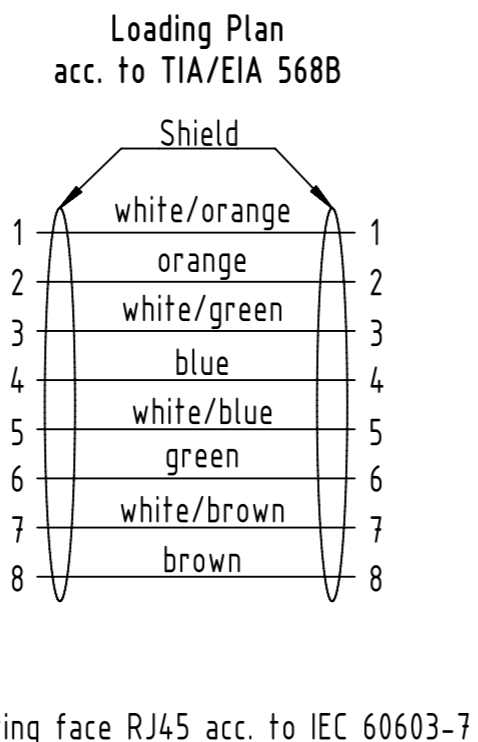

Loading Plan acc. to TIA/EIA 568B

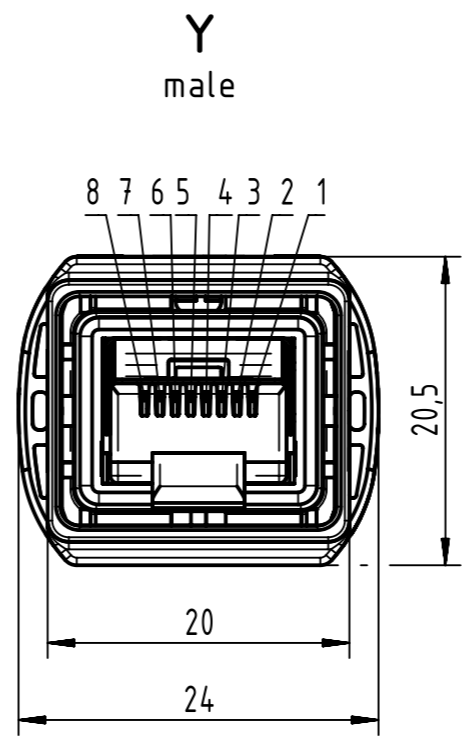


Y male

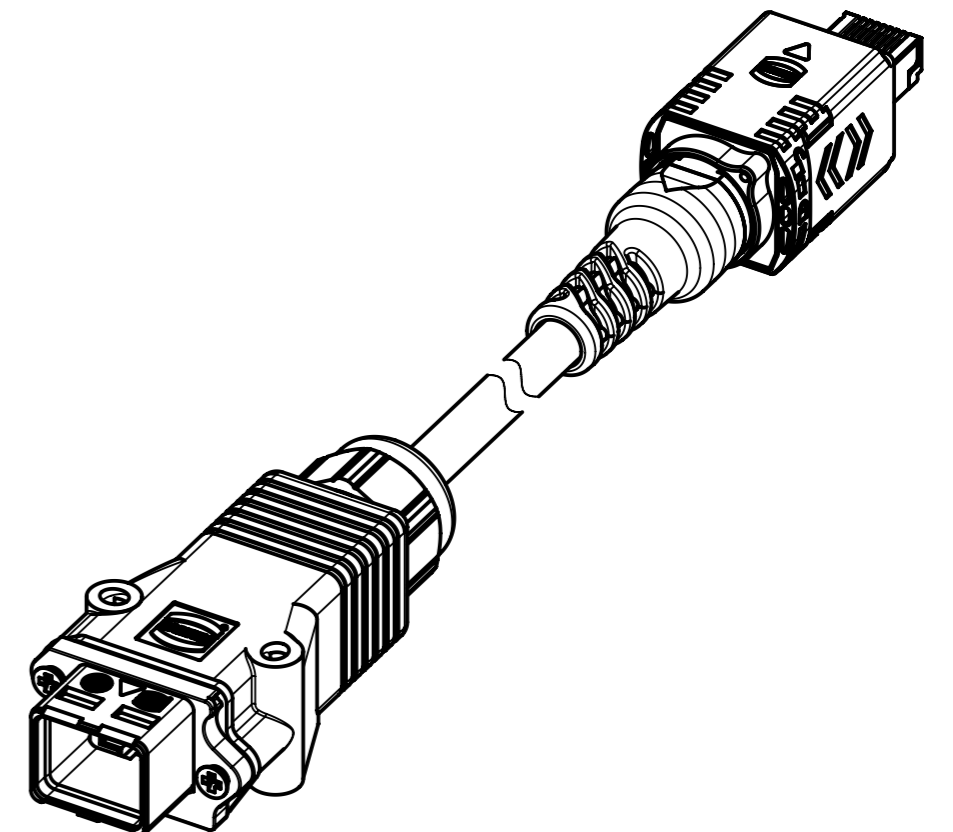

- Protection level: IP65/67  
 - Temperature range: -35°C ... +70°C

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
	All rights reserved		Created by BANIUD Banciu	Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean	Date 2019-08-07	State Final Release
	Department HCS - RO		Title HARTING PushPull RJ45 Cable Assembly				Doc-Key / ECM-Nr. 100523352/UGD/001/D 500000155919
HARTING Customised Solutions D-32339 Espelkamp			Type TB	Number 3345232XXX0003		Rev. D	Page 1/2

1	2	3	4	5	6	7	8	
RJ45 Ethernet Stranded Cable, 4x2xAWG 26/7, PUR, Cat. 6A, yellow								
19	3345232100003			10				
18	3345232080003			8				
17	33452320750003			7.5				
16	33452320500003			5				
15	33452320400003			4				
14	33452320350003			3.5				
13	33452320300003			3				
12	33452320250003			2.5				
11	33452320200003			2				
10	33452320150003			1.5				
9	33452320100003			1				
8	33452320090003			0.9				
7	33452320080003			0.8				
6	33452320070003			0.7				
5	33452320060003			0.6				
4	33452320050003			0.5				
3	33452320040003			0.4				
2	33452320030003			0.3				
1	33452320020003			0.2				
<b>Cont. no.</b>	<b>Part no.</b>	<b>Type of cable</b>		<b>Dim. a [m]</b>				

	All rights reserved		Created by BANCIUD Banciu		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean		Date 2019-08-07		State Final Release	
	Department HCS - RO		Title HARTING PushPull RJ45 Cable Assembly				Doc-Key / ECM-Nr. 100523352/UGD/001/D 500000155919		Rev. D		Page 2/2	
HARTING Customised Solutions D-32339 Espelkamp			Type TB		Number 3345232XXX0003							