


# Data sheet

## 3581.9 ZRK 6/2A RD

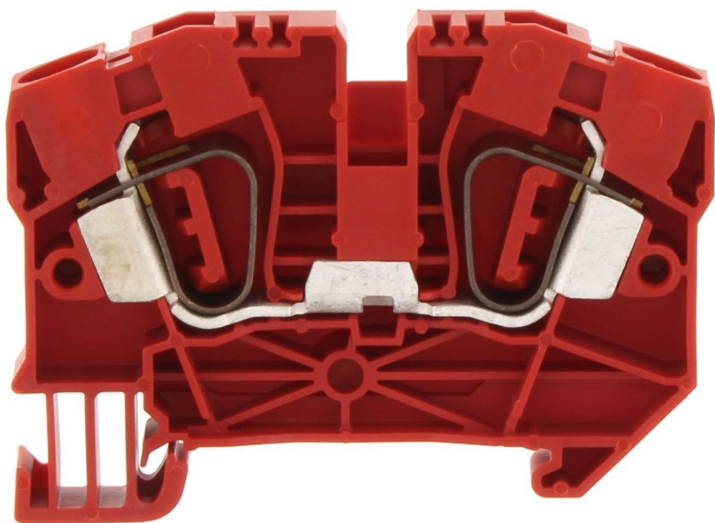

Feed-through terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 6 mm², Width: 8.1 mm, Colour: Red

### Business data

Article number	3581.9
Article name	ZRK 6/2A RD
GTIN (EAN)	4044211126995
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	16.8 g
Weight per piece (including packaging)	17.8 g
Unit of weight	G
Customs number	85369010
Country of origin	CZ
Prio-Article	3581.2
Product description	Feed-through terminal

### Technical data

#### Dimensions

Length	65 mm
Width	8.1 mm
Height TS 35/7.5	47.5 mm

#### Ratings

Rated voltage	1000 V
Rated current	41 A
Rated cross-section	6 mm <sup>2</sup>
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3
Maximum power dissipation for nominal condition	1.31 W

#### Connection data

Connection principle	Tension-spring connection
Connection position	Diagonal
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.5 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	10 mm <sup>2</sup>
Wire cross-section stranded, min.	0.5 mm <sup>2</sup>
Wire cross-section stranded, max.	10 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	6 mm <sup>2</sup>
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	8
Stripping length	13 mm

#### Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

# Data sheet

## 3581.9 ZRK 6/2A RD



### Technical data

#### Further technical data

Mounting type	Mounting rail TS 35/7,5
Gauge plug acc. to EN 60 947-1	A5
Number of cross-connection channels	1
End plate required	✓
Number of test pick-off options	2

#### Environmental Product Compliance

REACH Candidate Substance Note	No
--------------------------------	----

# Data sheet

## 3581.9 ZRK 6/2A RD

### Approvals

#### Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	yes
----------------------	-----

#### CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	yes
----------------------	-----

CSA Usegroup C: rated voltage	600 V
-------------------------------	-------

CSA Usegroup C: rated current	50 A
-------------------------------	------

CSA wire cross-section AWG, min.	22
----------------------------------	----

CSA wire cross-section AWG, max.	8
----------------------------------	---

CSA stripping length	10 mm
----------------------	-------

#### CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	yes
------------------------	-----

CSAus Usegroup C: rated voltage	600 V
---------------------------------	-------

CSAus Usegroup C: rated current	50 A
---------------------------------	------

CSAus wire cross-section AWG, min.	22
------------------------------------	----

CSAus wire cross-section AWG, max.	8
------------------------------------	---

CSAus stripping length	10 mm
------------------------	-------

#### cUL Recognized

cUL approval	C22.2 No 158
--------------	--------------

cUL Usegroup B: rated voltage	600 V
-------------------------------	-------

cUL Usegroup B: rated current	50 A
-------------------------------	------

cUL Usegroup C: rated voltage	600 V
-------------------------------	-------

cUL Usegroup C: rated current	50 A
-------------------------------	------

cUL Usegroup D: rated voltage	600 V
-------------------------------	-------

cUL Usegroup D: rated current	50 A
-------------------------------	------

cUL wire cross-section single-core (rigid) AWG, min.	22
--	----

cUL wire cross-section single-core (rigid) AWG, max.	8
--	---

cUL wire cross-section stranded AWG, min.	22
---	----

cUL wire cross-section stranded AWG, max.	8
---	---

cUL wire material	Cu
-------------------	----

cUL Recognized	1
----------------	---

### Approvals

#### KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1:2009
KEMA KEUR approval granted	yes
KEMA rated voltage	1000 V
KEMA rated current	41 A
KEMA rated impulse voltage	8 kV
KEMA wire cross-section single core (rigid), min.	0.5 mm <sup>2</sup>
KEMA wire cross-section single-core (rigid), max.	10 mm <sup>2</sup>
KEMA wire cross-section stranded, min.	0.5 mm <sup>2</sup>
KEMA wire cross-section stranded, max.	10 mm <sup>2</sup>

#### UL Recognized

UL approval	UL 1059
UL Usegroup B: rated voltage	600 V
UL Usegroup B: rated current	50 A
UL Usegroup C: rated voltage	600 V
UL Usegroup C: rated current	50 A
UL Usegroup D: rated voltage	600 V
UL Usegroup D: rated current	50 A
UL wire cross-section single-core (rigid) AWG, min.	22
UL wire cross-section single-core (rigid) AWG, max.	8
UL wire cross-section stranded AWG, min.	22
UL wire cross-section stranded AWG, max.	8
UL wire material	Cu
UL factory wiring	1
UL field wiring	1
UL Recognized	1

# Data sheet

## 3581.9 ZRK 6/2A RD





### Approvals

#### DNV GL Approval

DNV GL Location Classes	Temperature: B, Humidity: B, Vibration: A
DNV GL approval granted	1
DNV GL rated cross-section	6 mm <sup>2</sup>
DNV GL rated current	41 A
DNV GL rated voltage	800 V
DNV GL test standard	IEC 60947-7-1:2009
DNV GL wire cross-section single-core (rigid), max.	10 mm <sup>2</sup>
DNV GL wire cross-section stranded, max.	6 mm <sup>2</sup>

Media

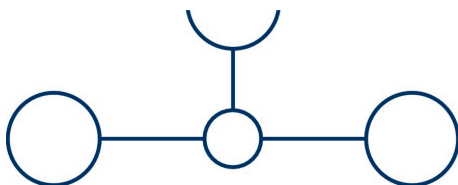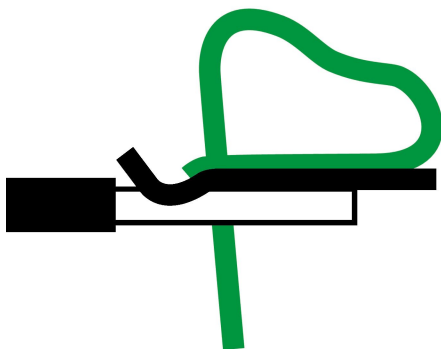

### Accessories


#### End plate



End plate, Width: 2 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3760.2</u>	ZAP 6/2A BG	4044211060817	20

#### End stop



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 6 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3748.2</u>	ZES 35 BG	4044211060572	50

#### Insulated cross-connector



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 15.7 mm, Rated cross-section: 6 mm², Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3763.8</u>	ZQI 6/2 YE	4044211060893	50



Insulated cross-connector, No. of poles: 8, Mounting type: Plug in, Width: 64.3 mm, Rated cross-section: 6 mm², Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3769.8</u>	ZQI 6/8 YE	4044211060954	10 ST



Insulated cross-connector, No. of poles: 9, Mounting type: Plug in, Width: 72.4 mm, Rated cross-section: 6 mm², Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3770.8</u>	ZQI 6/9 YE	4044211060961	10 ST



### Insulated cross-connector



Insulated cross-connector, No. of poles: 3, Mounting type: Plug in, Width: 23.8 mm, Rated cross-section: 6 mm<sup>2</sup>, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3764.8</u>	ZQI 6/3 YE	4044211060909	50



Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 31.9 mm, Rated cross-section: 6 mm<sup>2</sup>, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3765.8</u>	ZQI 6/4 YE	4044211060916	20 ST



Insulated cross-connector, No. of poles: 7, Mounting type: Plug in, Width: 56.2 mm, Rated cross-section: 6 mm<sup>2</sup>, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3768.8</u>	ZQI 6/7 YE	4044211060947	20 ST



Insulated cross-connector, No. of poles: 5, Mounting type: Plug in, Width: 31.9 mm, Rated cross-section: 6 mm<sup>2</sup>, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3766.8</u>	ZQI 6/5 YE	4044211060923	20 ST



Insulated cross-connector, No. of poles: 6, Mounting type: Plug in, Width: 48.1 mm, Rated cross-section: 6 mm<sup>2</sup>, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3767.8</u>	ZQI 6/6 YE	4044211060930	20 ST



Insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 80.5 mm, Rated cross-section: 6 mm<sup>2</sup>, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3771.8</u>	ZQI 6/10 YE	4044211060978	10 ST

# Data sheet

## 3581.9 ZRK 6/2A RD



### Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 8 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
<u>9323.7</u>	PMC SB 8/40 WH	4044211129231	400 ST

### Four-way cover



Cover, Length: 10.5 mm, Width: 32.4 mm, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3708.0</u>	ZAD 6/4/B YE	4044211060268	20 ST