


Steward

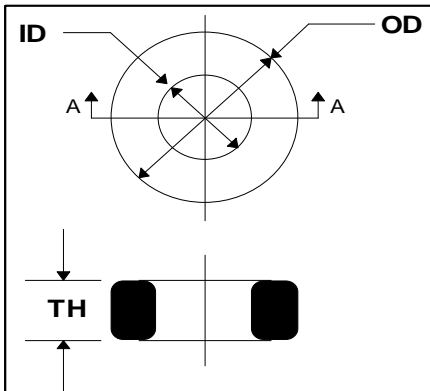

CORE DIMENSIONS					
UNCOATED CORE					35T0155-100
	MM	INCHES		MM	INCHES
OD	3.94	(.155)	±	.13	(.005)
ID	2.24	(.088)	±	.13	(.005)
TH	1.27	(.050)	±	.13	(.005)
SINGLE PARYLENE COATING					35T0155-10P
OD	3.96	(.156)	±	.13	(.005)
ID	2.21	(.087)	±	.13	(.005)
TH	1.30	(.051)	±	.13	(.005)

WEIGHT / K 0.11 LBS
 INITIAL PERMEABILITY 5000

ELECTRICAL SPECIFICATION								
	MIN		NOM	MAX	MAX	FREQ.	VOLT.	
	(μH)	MIN TOL.	(μH)	(μH)	TOL.	(kHz)	(V)	TURNS
L	.575	(-20%)	.719	.863	(+20%)	100	≤ .00023	1
Q	10		-	-		100	≤ .00023	1

COATING SPECIFICATIONS			
	Max. Coating	Min. DLB	
TYPE	(mils.)	VAC	TEST FORCE (LB)
PARYLENE	0.5	1000	.13

NOTES:



Rev	Description	Date	INT
A	Original Draft	5/9/1995	JBE
B	UPDATED TO NEW FORMAT	5/9/1995	JBE
C	TRANSFER TO LOTUS NOTES	11/19/1997	IS
D	RE-ACTIVATE PRINT REMOVE Q SPECS CHANGE PART NUMBER	10/5/2005	JRK
E	Revised Template	6/1/2006	WMM

Date: 6/1/2006	DWG # 35T0155-10P-E	Rev:
Drawn By: WMM	Title # 35T0155-10P	E

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

UNCONTROLLED DOCUMENT