


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 15679,BS	02/20/09	BS
A1	ADD OPERATING AND STORAGE TEMPERATURE RATING, RFS. 27814	08/31/23	MK

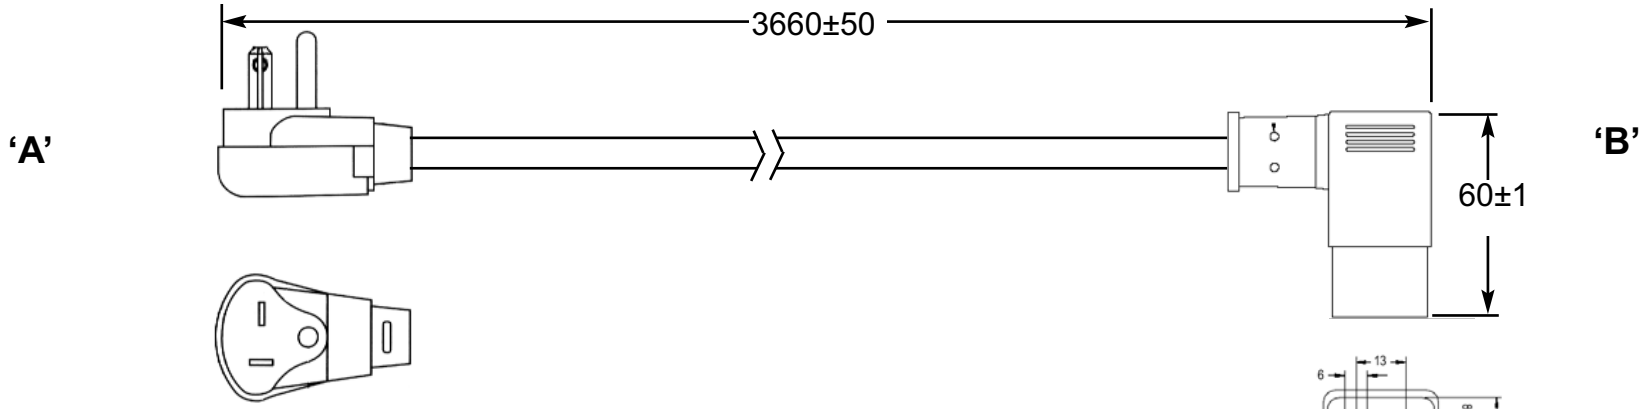

GENERAL SPECIFICATIONS:

- RATING: 16A / 125V AC
- CABLE TYPE / SIZE: SJTW, 14 AWG x 3C
- TEMPERATURE RATING: 105° C
- CONDUCTOR COLORS: BLACK / WHITE / GREEN
- CABLE JACKET COLOR: BLACK
- OVERALL LENGTH (L): 3660 ± 50 mm
- CABLE OUTER DIAMETER: 9.3 ± 0.2 mm
- END 'A' TERMINATION: NEMA 5-20P, RIGHT ANGLE
- END 'B' TERMINATION: IEC 320 /C19, RIGHT ANGLE
- APPROVALS PLUG: UL, CSA or cUL
- APPROVALS CABLE: UL, CSA or cUL
- APPROVALS CONNECTOR: UL, CSA or cUL
- OPERATING AND STORAGE TEMPERATURE RATING: -40°C ~ 70°C

PACKING:
HANKING



NOTES:

- CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVALS SYMBOLS OR FILE NUMBER(S).



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
			TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005 MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013	GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111 www.globtek.com
INIT.BY: BS	DATE: 05/27/08	FSCN No.: G, CC, YL	SIZE A	MODEL: N / A
DRAWN: NF	DATE: 05/27/08	SCALE: NONE		REV. A1
APRVD: HM	DATE: 05/27/08	PART NO: 37512312F7032L(R)		SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice