


Data sheet

3757.8 ZAP SR YE

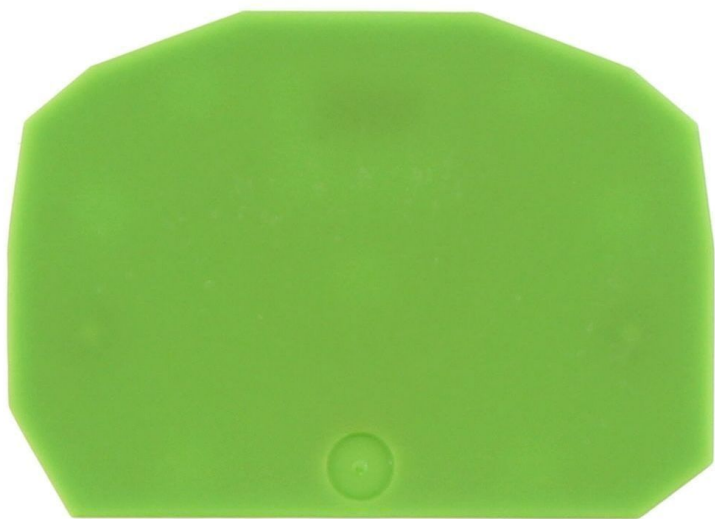

End plate, Width: 1.5 mm, Colour: Yellow

RAL: 1026

Business data

| | |
|--|---------------|
| Article number | 3757.8 |
| Article name | ZAP SR YE |
| GTIN (EAN) | 4044211108342 |
| Packaging unit | 50 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 1.8 g |
| Weight per piece (including packaging) | 1.9 g |
| Unit of weight | G |
| Customs number | 85389099 |
| Country of origin | DE |
| Prio-Article | 3757.2 |
| Product description | End plate |

Data sheet

3757.8 ZAP SR YE

Technical data

Dimensions

| | |
|--------|--------|
| Length | 40 mm |
| Width | 1.5 mm |
| Height | 287 mm |

Materials

| | |
|---------------------------|---------------|
| Material | Polyamide 6.6 |
| Flammability class UL 94 | V-2 |
| Working temperature, min. | -40 °C |
| Working temperature, max. | 105 °C |

Further technical data

| | |
|-----------------------|---|
| Designed as end plate | ✓ |
| Snap-on available | ✓ |

Environmental Product Compliance

| | |
|--------------------------------|----|
| REACH Candidate Substance Note | No |
|--------------------------------|----|

Media

Accessories

##INVERSE##CONTA-CONNECT



Protective earth terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Green-yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|------------------|---------------|----------------|
| <u>3584.2</u> | ZSLN 2,5/2A GNYE | 4044211151881 | 100 ST |



Ex protective-earth terminal ATEX-certified Tension-spring connection, Mounting type: Mounting rail TS 15/5.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Green-yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|------------------------|---------------|----------------|
| <u>1709.2</u> | ZSLN 2,5/2A/15 Ex GNYE | 4044211059385 | 100 ST |



Ex protective-earth terminal ATEX-certified Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Green-yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|---------------------|---------------|----------------|
| <u>1711.2</u> | ZSLN 2,5/2A Ex GNYE | 4044211059347 | 100 ST |



Protective earth terminal, Tension-spring connection, Mounting type: Mounting rail TS 15/5.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Green-yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|---------------------|---------------|----------------|
| <u>3586.2</u> | ZSLN 2,5/2A/15 GNYE | 4044211151935 | 100 ST |



Ex feed-through terminal ATEX-certified, Tension-spring connection, Mounting type: Mounting rail TS 15/5.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|----------------------|---------------|----------------|
| <u>1700.2</u> | ZSRK 2,5/2A/15 Ex BG | 4044211059354 | 100 |

##INVERSE##CONTA-CONNECT




Ex feed-through terminal ATEX-certified, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|-------------------|---------------|----------------|
| <u>1702.2</u> | ZSRK 2,5/2A Ex BG | 4044211059316 | 100 |



Feed-through terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|----------------|---------------|----------------|
| <u>3583.2</u> | ZSRK 2,5/2A BG | 4044211151874 | 100 |



Feed-through terminal, Tension-spring connection, Mounting type: Mounting rail TS 15/5.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|-------------------|---------------|----------------|
| <u>3585.2</u> | ZSRK 2,5/2A/15 BG | 4044211151904 | 100 |