


multimec® 3F/4F + 1P/1Q/1R


Technical Data

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
 - low temp: -40/+115°C
 - high temp: -40/+160°C

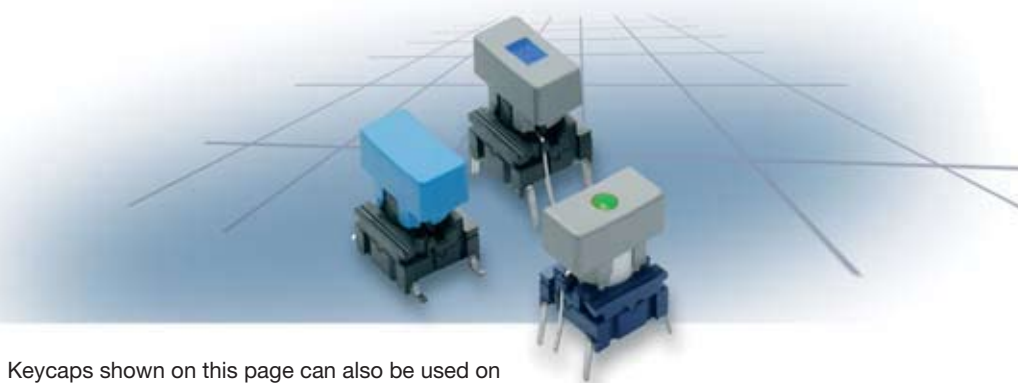


Keycaps shown on this page can also be used on **illumec™ switch 4F**


Dimensions (through-hole) 3F

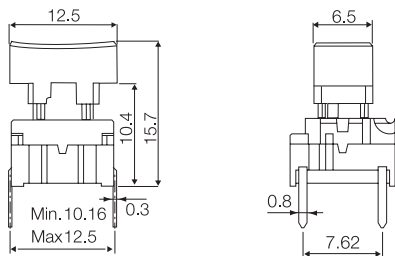


PCB layout

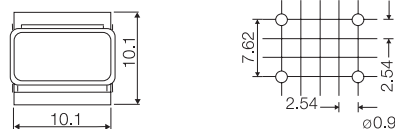


Dimensions (w/LED) 3F

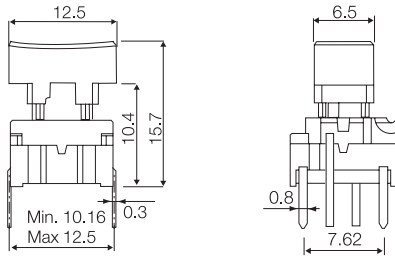


PCB layout (top view)

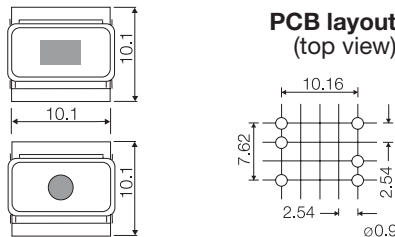


Dimensions (SMD) 3F


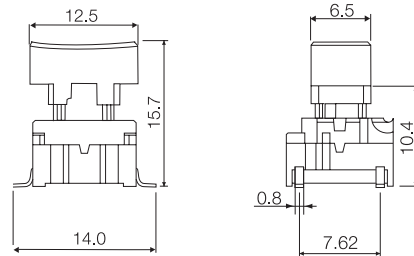


PCB layout

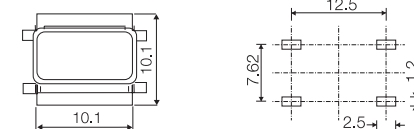

How to order

3 F	<input type="checkbox"/>	<input type="checkbox"/>	+	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Switch	Mounting	L 6 low temp. H 9 high temp.		Cap	00 blue 02 green 03 grey 04 yellow 06 white 08 red 09 black	
	T through-hole S surface mount					

3 F	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	+	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Switch	Mounting	L 6 low temp. H 9 high temp.	LED		1Q	00 blue 03 grey 08 red 09 black	Lens
	T through-hole		00 blue 20 green 40 yellow 60 white 80 red 2040 green/yellow 8020 red/green 8040 red/yellow				1 transparent 6 frosted white
					1R		
							

Ordering example: 3FTL680 + 1Q091

For updates of products and/or changes of specifications please see www.mec.dk