


SERIES

4214R
4214



Wound Beads

DASH NUMBER*	FIGURE	TURNS	MINIMUM IMPEDANCE				
			10 MHz	50 MHz	100 MHz	150 MHz	200 MHz
SERIES 4214R / 4214							
-2	1-5	2 1/2 x2	370	590	450	350	280
-4	1-6	4 1/2	700	1100	650	350	270

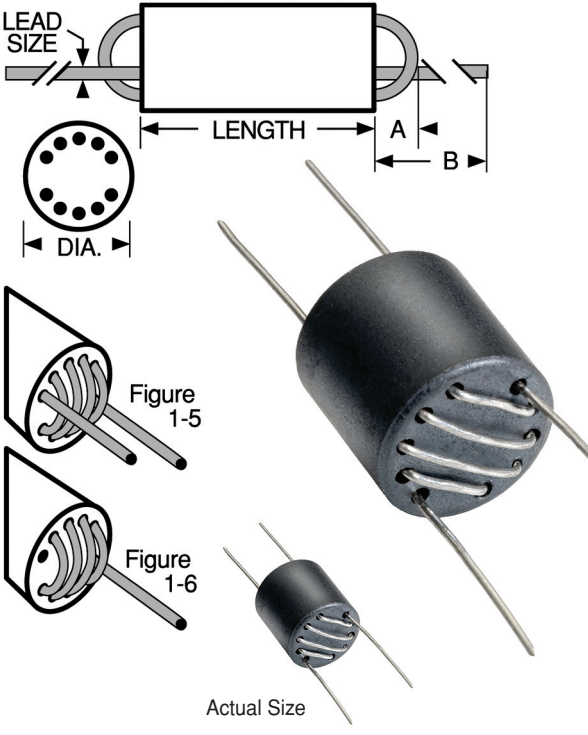

*Complete part # must include series # PLUS the dash #

Wide Band Chokes 10 hole ferrite slugs, made in API-2 Material, with 2 x 2.5 or 4.5 turns of tinned copper wire.

Applications Interference suppression

Physical Parameters

	Inches	Millimeters
Length	0.388 to 0.402	9.98 to 10.02
Diameter	0.388 to 0.402	9.98 to 10.02
Lead Size		
AWG #24 TCW	0.0185 to 0.0215	0.47 to 0.55
A	0.14 Max.	3.55 Max.
B	1.10 Min.	28.0 Min.

Impedances measured on HP 4191A Impedance Analyzer.

High resistivity ferrite material eliminates the need to insulate windings.

Lead Wire Plated copper

Packaging Bulk only

For more detailed graphs, contact factory

