



TOLERANCE :  
+1.0mm  
-1.0mm

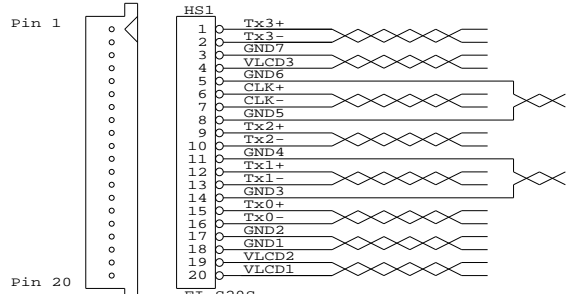


FI-S20S  
(OR FI-SE20M)  
JAE  
**PANEL SIDE**

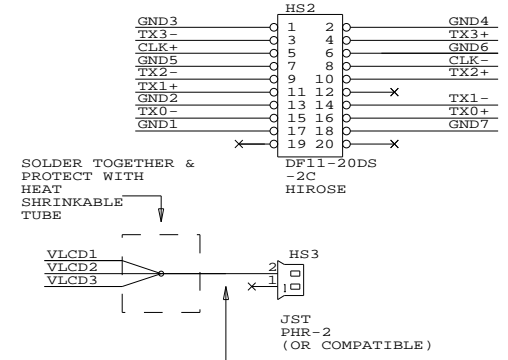

**CABLE: UL1007 AWG24 RED**


JAE  
FI-S20S

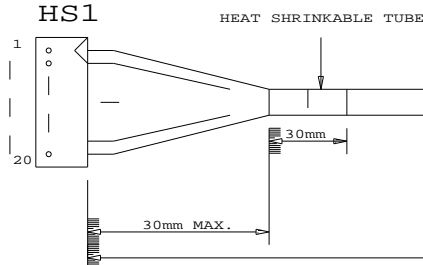

**LENGTH = 210mm +/- 10mm**

CABLE: SHIELDED ROUND  
UL 20276, 10 PAIRS, 30AWG, L=210mm  
JACKET: PVC COLOR BLACK

HEAT SHRINKABLE TUBE



HS2  
HIROSE  
DF11-20DS-2C  
  
HS3  
JST  
PHR-2  
(OR COMPATIBLE)

USAGE:  
CABLE FOR NEC NL10276BC16-01 PANEL  
(WITH DM1000)

P/N 426476501-3  
LVDS PANEL CABLE: NEC NL10276BC16-01, 210mm (DM1000)

**RoHS**  
COMPLIANCE

DIGITAL VIEW LTD. COPYRIGHT 2009, ALL RIGHTS RESERVED CONFIDENTIAL		
DRAWN BY: VICTOR NG		
Title LVDS CABLE: NEC NL10276BC16-01, 210mm(DM1000)		
Size Document Number		
B	(...\DV\DV_CABLE\C6476501.SCH)	REV 00
Date:	June 8, 2009	Sheet 1 of 1