


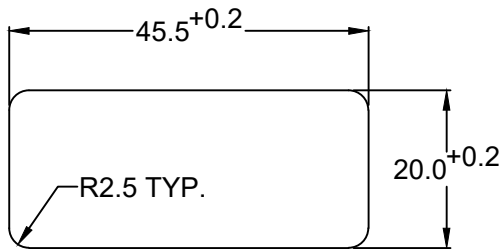
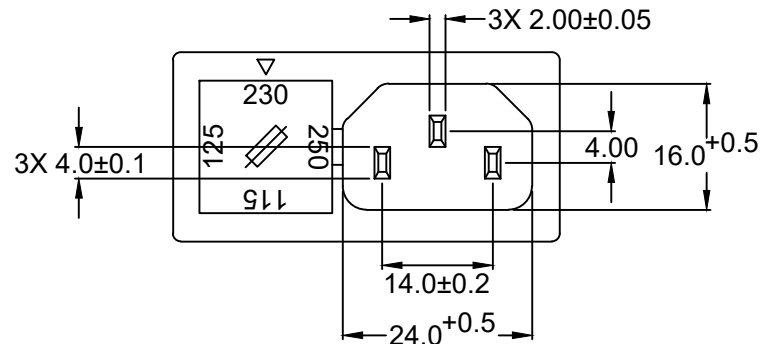


MATERIAL AND FINISH:
 Insulator: Polycarbonate, UL-94V-0 rated
 Contacts: Copper, Tin plated



ELECTRICAL SPECIFICATIONS:
 Inlet Current rating: 10 A 
 Fuse Holder Current rating: 6A  6.3A 
 Voltage rating: 250 VAC
 Insulation resistance:
 100 Mohm min. at 500 VDC
 Dielectric withstanding voltage:
 2000 VAC for one minute



RECOMMENDED
 PANEL CUTOUT



REPLACE WITH
 CORRESPONDING
 PANEL THICKNESS

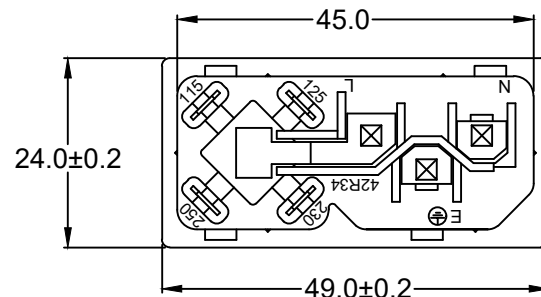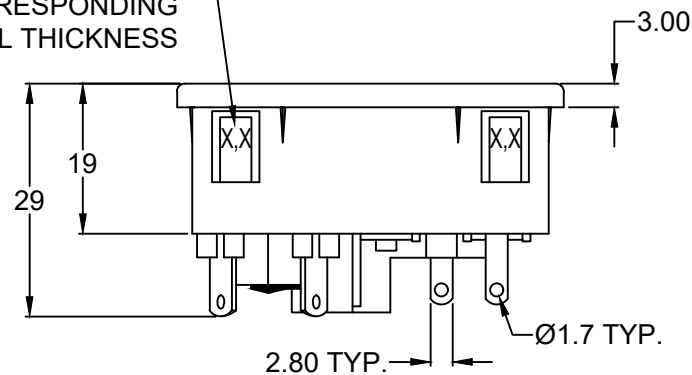


ORDERING CODE:
 42R34-3 $\frac{2}{1}$ $\frac{2}{2}$ - $\frac{3}{3}$

- 1) COLOR
 1 = BLACK
 2 = GRAY


- 2) ELECTRICAL CIRCUIT
 CONFIGURATION

1 = 10A 250V 70°C
 2+GROUND 

2 = 10A 250V 120°C
 2+GROUND 

4 = 10A 250V 70°C
 2 POLE 

- 3) PANEL THICKNESS

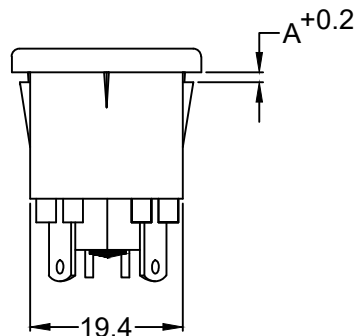

RoHS
 COMPLIANT

REVISIONS	CHANGE	CHK	CHK	APPR
	DATE	BY	DATE	BY
	REV	DATE	REVISED	CURRENT RATING
	A	12/15/21		PB

P/N	A	MAX. PANEL THICKNESS
42R34-3X2X-150	1.5	1.5
42R34-3X2X-200	2.0	2.0
42R34-3X2X-250	2.5	2.5

ADDITIONAL PANEL THICKNESS
 AVAILABLE ON REQUEST

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20
DRAWN BY	GQ
DATE:	09/13/01
CHECK BY	TD
DATE:	09/18/01
APPR BY	PB
DATE:	09/18/01

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET AND COMBINATION
 FUSE HOLDER; SOLDER TERMINALS; SNAP-IN

PART #: 42R34-3X2X-XXX		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV: A
SCALE: NTS		