






Touch protection cover for main current with ring cable lug connection



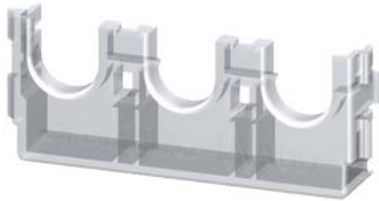



product brand name	SIRIUS
product designation	Cover
design of the product	Covers for devices with ring terminal lug connection for main current level, for 3RV20 size S00, S0
Substance Prohibitance (Date)	05/01/2012





Certificates/ approvals

General Product Approval	Declaration of Conformity
 Confirmation	   

Test Certificates Marine / Shipping

Special Test Certificate	Type Test Certificates/Test Report				
--	--	---	---	---	---

Marine / Shipping other Railway

			Confirmation		Vibration and Shock
---	---	---	------------------------------	---	-------------------------------------

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
 Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2928-4AA00>
 Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2928-4AA00>
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3RV2928-4AA00>
 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2928-4AA00&lang=en
 Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2928-4AA00/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2928-4AA00&objecttype=14&gridview=view1>

last modified:

12/23/2020 