


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/15/10	D.N.

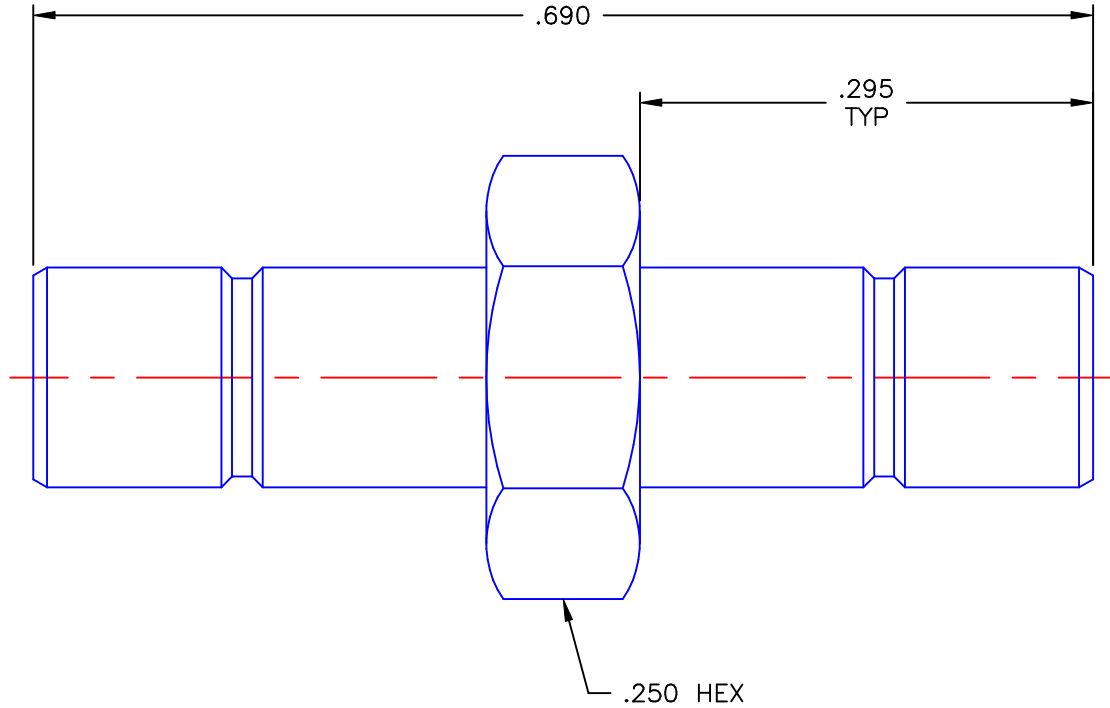


NOTES:

MATERIALS:

1. BODY & CONTACT = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".

FINISHES:

1. BODY = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN: D.N.	DATE: 12/15/10	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.
	CHKD: M.J.	DATE: 12/15/10	
DECIMAL	ANGLE	APVD: J.M.	DATE: 12/15/10
REFERENCE:			SMB STRAIGHT MALE JACK TO JACK ADAPTER SIZE: A FSCM NO.: 19505 DWG NO.: 5213-1501-000 SCALE: 8:1 THIRD ANGLE PROJECTION
ORIGINATOR: D.N. DATE: 12/15/10		MATERIALS & FINISHES: SEE NOTES	REV: A SHEET 1 OF 1

5213-1501-000