


3-phase busbar for 2 circuit breakers Size S2 Modular spacing: 75 mm



General technical data		
size of the circuit-breaker		S2
suitability for use		circuit-breakers 3RV2
protection class IP on the front according to IEC 60529		IP20
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front
Installation/ mounting/ dimensions		
operational current rated value	A	108
number of poles for main current circuit		3
type of electrical connection for main current circuit		screw-type terminals
Certificates/ approvals		
General Product Approval		Declaration of Conformity



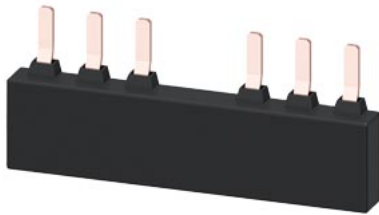



[Confirmation](#)



EG-Konf.

Test Certificates	Marine / Shipping				
Type Test Certificates/Test Report	Special Test Certificate				
		ABS	BUREAU VERITAS	DNV	LRS

Marine / Shipping	other		Railway
			
			Confirmation
			Vibration and Shock

Further information
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfib=3RV1935-3A Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1935-3A>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1935-3A>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1935-3A&lang=en

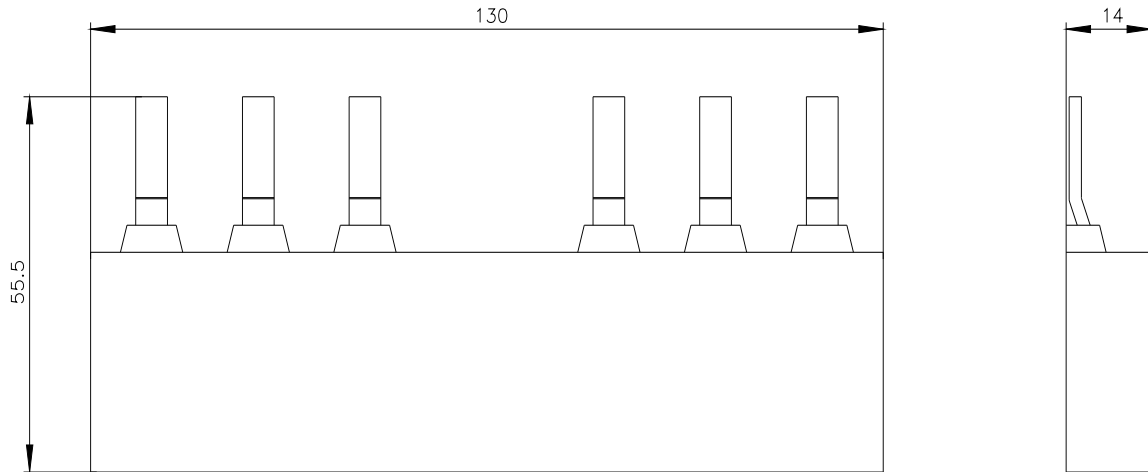

last modified:

2/9/2022 