

Fuse module, 3 fuse cartridges for 5x20 micro-fuses, Individually switched, Screw connection, Mounting type: Mounting rail TS 35

**Business data**

Article number	5712.2
Article name	SM 3-E
GTIN (EAN)	4044211069186
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	60.6 g
Weight per piece (including packaging)	75.28 g
Unit of weight	G
Customs number	85363010
Country of origin	NL
Product description	Fuse modules

### Technical data

#### Dimensions

Length	87 mm
Width	24 mm
Height TS 35/7.5	77 mm

#### Ratings

Current load, max.	6,3 A
Overvoltage category	III
Contamination degree	2

#### Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	7 mm
Torque	0.6 Nm

#### Input data

Max. operating voltage AC/DC	250 V
Current load per channel, max.	4 A
Number of channels	3

#### Materials

Working temperature, min.	-20 °C
Working temperature, max.	50 °C

#### Further technical data

Fuse size	5x20 mm
-----------	---------

#### Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

---

**Approvals**

---


**Standards and regulations**

---

Standards / specifications	DIN VDE 0110 / EN 50178
----------------------------	-------------------------

---

Media

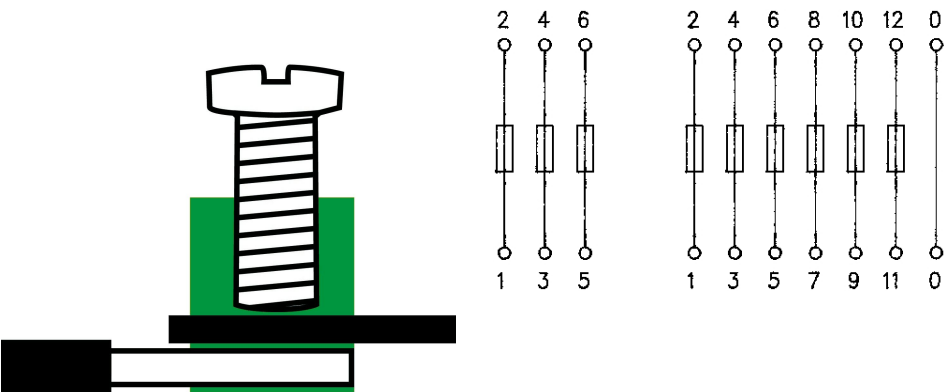

---

**Accessories**

---