


Specification Sheet

Part Number: 596-00326

Made with UV stable inks and materials for durability and weather resistance

The labels are supplied with aggressive adhesive to ensure long life

Solar Installation labels meet NEC & IFC standards for printed text, character height, color and outdoor UV stability to pass inspections

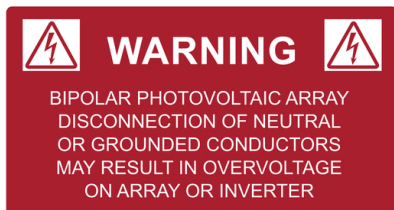

Solar Label, BIPOLAR SOLAR ARRAY, 3.75" x 2.0", VL, Red, 50/pkg

Article Number 596-00326

Type BIPOLARPV

Color Red (RD)

Quantity Per reel

Product Description Many times common solar label designs are specified even though they might not be required by code. HellermannTyton offers a selection of some of the most commonly requested labels for use on solar installations.

Short Description Solar Label, BIPOLAR SOLAR ARRAY, 3.75" x 2.0", VL, Red, 50/pkg

Global Part Name BIPOLARPV-V-RD

Width W (Imperial)	3.75
Width W (Metric)	92.25
Height H (Imperial)	2.0
Height H (Metric)	50.80
Material	Vinyl (V)
Material Shortcut	V
Adhesive	Acrylic
Halogen Free	Yes
UV Resistant (Yes/No)	No
Adhesive Operating Temperature	-40°F to +174°F (-40°C to +79°C)
Operating Temperature	-40°F to +174°F (-40°C to +79°C)
Reach Compliant (Article 33)	No
ROHS Compliant	Yes
Certification/Specification	IFC 2012 UL 969 NEC2011
Warranty (US)	Yes

UL Recognized (US)	Yes
Package Quantity (Imperial)	50
Package Quantity (Metric)	50
Customs Number	3919905060
Labels per Column	1
Labels per Row	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)