


## Specification Sheet

Part Number: 596-00406

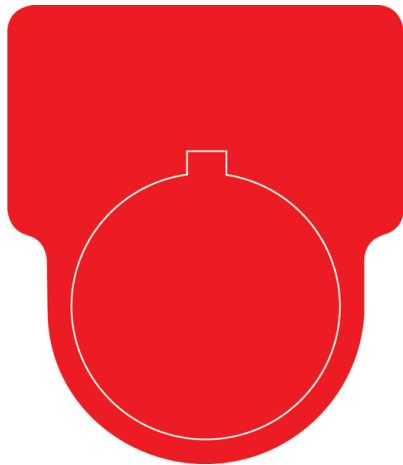

Foam Nameplate labels are less costly than plastic or metal engraved plates, saving material costs.

Foam Nameplate labels conform to textured and other low energy surfaces ensuring the labels stay in place for the life of the product.

Labels are UV and chemical resistant for long life in an industrial environment.

Foam nameplate labels are printable using a thermal transfer printer for complete control and on-demand creation of labels.

Article Number

596-00406

Type

NPLH31X38RD22.5

Color

Red (RD)

Quantity Per

roll

Product Description

Foam Nameplate labels are designed to replace plastic and metal engraved phenolic plates commonly found on electrical control panels. The labels provide the look and feel of a plastic engraved or metal plate, but at a fraction of the cost. Labels can be printed using HellermannTyton Tagprint Pro labeling software and can include printed logos, barcodes and text of almost any size and type.

|                                       |   |
|---------------------------------------|---|
| Short Description                     | Foam Nameplate, 1.2" x 1.5" Button Label With .88" Hole, PET, Red, 250/roll |
| Global Part Name                      | NPLH31X38RD22.5-518-RD  |
| Width W (Imperial)                    | 1.2   |
| Width W (Metric)                      | 30.5  |
| Height H (Imperial)                   | 1.50  |
| Height H (Metric)                     | 38.10   |
| Width of Liner (Metric)               | 36.83   |
| Width of Liner (Imperial)             | 1.45  |
| Mounting Hole Diameter D (Imperial)   | 0.88  |
| Mounting Hole Diameter D (Metric)     | 22.35 mm  |
| Mounting Hole Diameter D Max (Metric) | 22.35   |
| Material                              | Type 518, Polyester Foam (518)  |
| Material Shortcut                     | 518   |
| Adhesive                              | Acrylate with base of acrylic foam  |

|                                |                                  |
|--------------------------------|----------------------------------|
| Halogen Free                   | No                               |
| UV Resistant (Yes/No)          | No                               |
| Adhesive Operating Temperature | -40°F to +176°F (-40°C to +80°C) |
| Operating Temperature          | -40°F to +176°F (-40°C to +80°C) |
| Reach Compliant (Article 33)   | Yes                              |
| ROHS Compliant                 | Yes                              |
| Package Quantity (Imperial)    | 250                              |
| Package Quantity (Metric)      | 250                              |
| Customs Number                 | 3919102055                       |
| Labels per Column              | 1                                |
| Labels per Row                 | 1                                |

## About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. ([www.hellermann.tyton.com](http://www.hellermann.tyton.com)).

