

■ **Features**

- Single output from 5-6W
- 100-240Vac Universal Input
- Certificates: UL, CE
- Safety standard: IEC60950, IEC60601, IEC61558, IEC60335
- Frequency: 50-60Hz
- Ripple: 80mV
- OVP, OCP, SCP, and Overload protection
- Efficiency Level: VI
- Available Plug types: US, EU, AU, UK plug
- Dimension: 65x42.5x25mm (exclude plug)



\*Product images are for illustrative purposes only and may vary from actual design.

■ **Application**


- Consumer electronics, Telecom and office equipment
- Industrial equipment


■ **Model List**

**Custom Designs Available!**

Model	Output Voltage	Output Current	Power	Certifications
WM05S-050-X-XX	5V	1A	5W	UL, CE
WM05S-051-X-XX	5V	1.2A	6W	UL, CE
WM05S-060-X-XX	6V	1A	6W	UL, CE
WM05S-090-X-XX	9V	0.6A	5.4W	UL, CE
WM05S-120-X-XX	12V	0.5A	6W	UL, CE

■ **Mechanical Diagram**

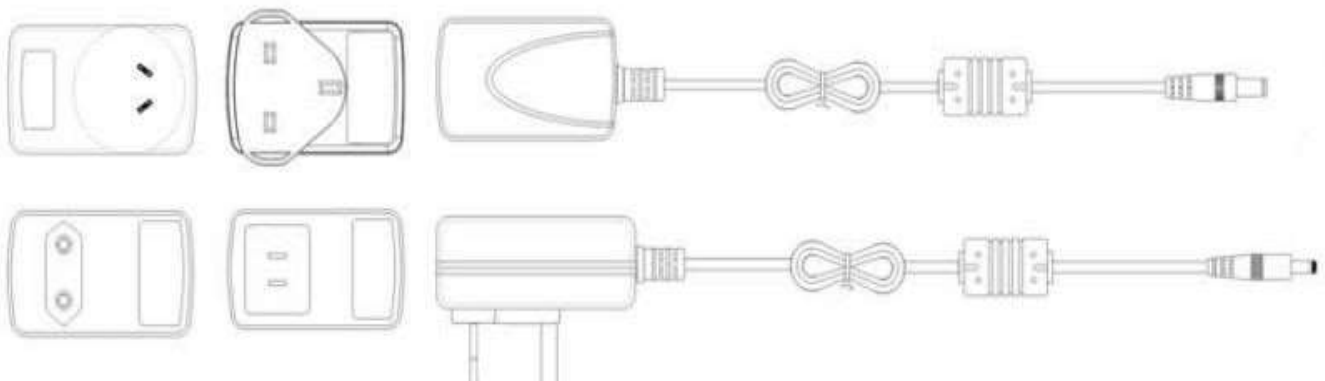

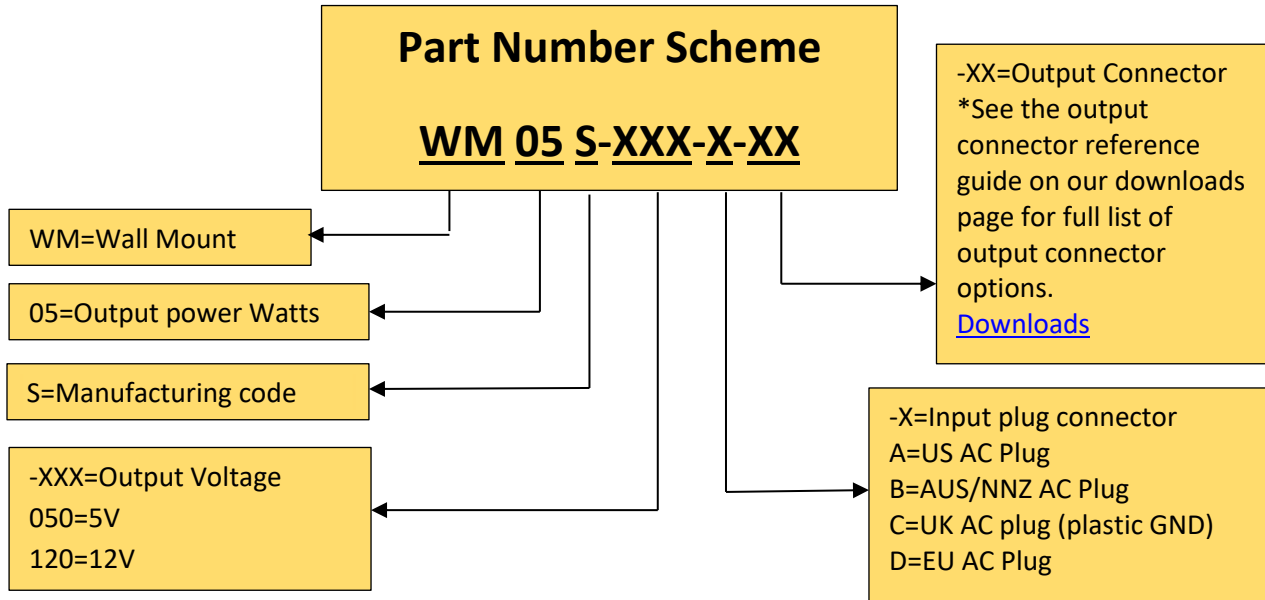

**\*Product images are for illustrative purposes only and may vary from actual design.**

**\*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**