

■ Features

- Single output to 45-48W
- 100-240Vac Universal input
- Certificates: UL, CE
- Safety standard: IEC60950, IEC60601, IEC61558, IEC60335
- Frequency: 50-60Hz
- Ripple: 120mV
- OVP, OCP, SCP, and Over load
- Efficiency Level: VI
- Interchangeable Plug types: US, EU, AU, UK
- MTBF: 50,000 hours
- Dimension: 75x40x38.5mm(exclude plug)



*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Consumer electronics, Telecom and office equipment
- Industrial equipment


■ Model List


Custom Designs Available!

Model	Output Voltage	Output Current	Power	Certifications
WM048S-090I-TP1-XX	9V	5A	45W	UL, CE
WM048S-120I-TP1-XX	12V	4A	48W	UL, CE
WM048S-150I-TP1-XX	15V	3.2A	48W	UL, CE
WM048S-190I-TP1-XX	19V	2.5A	48W	UL, CE
WM048S-240I-TP1-XX	24V	2A	48W	UL, CE

■ Mechanical Diagram

*Available with Internal USB Port. Detached USB DC Cable is optional (not included)!

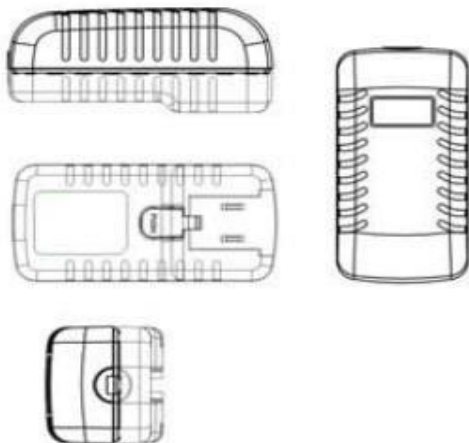

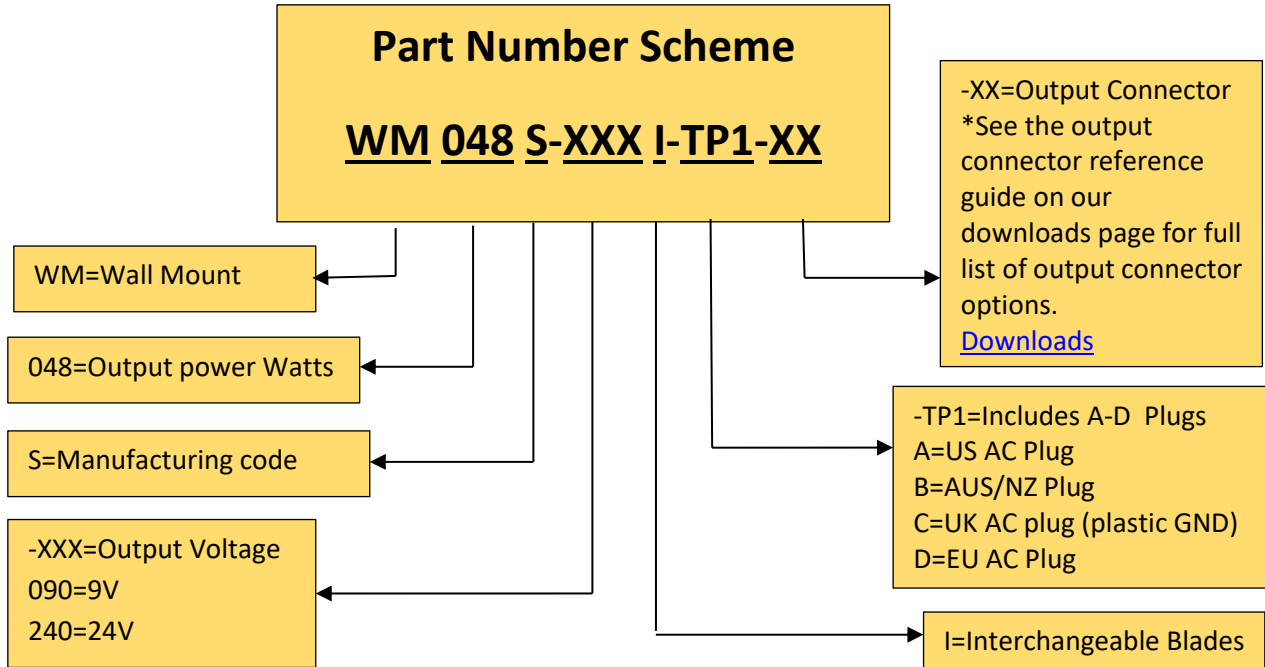

*Product images are for illustrative purposes only and may vary from actual design.

*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.