


Industrial USB hub 4 with 4 USB 2.0 sockets, for access to the USB interface of a installed device, without opening the control cabinet, Mounting onto standard rail possible, suitable for Standard USB interfaces Further information, Quantity and content: see technical data

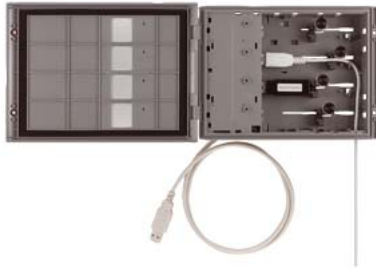

General information	
Product type designation	Industrial USB Hub 4
Installation type/mounting	
Rail mounting	Yes; Standard - DIN rail
Mounting in landscape format possible	Yes
Supply voltage	
Type of supply voltage	24 V DC
Rated value (DC)	24 V
permissible range, lower limit (DC)	20.4 V
permissible range, upper limit (DC)	28.8 V
Interfaces	
Number of USB interfaces	4; Type USB 2.0, 500 mA each; e.g. connection of mouse, keyboard, printer, USB stick, USB IPC flash drive
Standards, approvals, certificates	
CE mark	Yes
cULus	Yes; UL for US, UL for Canada
RCM (formerly C-TICK)	Yes; C-Tick
KC approval	No
Suitable for safety functions	No
Ambient conditions	
Ambient temperature during operation	
<ul style="list-style-type: none"> <li>• Operation (vertical installation)                             <ul style="list-style-type: none"> <li>— For vertical installation, min. 0 °C</li> <li>— For vertical installation, max. 50 °C</li> </ul> </li> </ul>	
Ambient temperature during storage/transportation	
<ul style="list-style-type: none"> <li>• min. -20 °C</li> <li>• max. 60 °C</li> </ul>	
Relative humidity	
<ul style="list-style-type: none"> <li>• Operation, max. 90 %</li> </ul>	
Mechanics/material	
Enclosure material (front)	
<ul style="list-style-type: none"> <li>• Plastic</li> </ul>	Yes
Dimensions	
Width of the housing front	212 mm
Height of housing front	156 mm
Overall depth	50 mm
Weights	

Weight without packaging	460 g
<b>Scope of supply</b>	
Delivery quantity in pieces	1; Content: 1x USB Hub 4, 10x plastic mounting clip, 1x female 2-pin connector
<b>Other</b>	
Merchandise	Yes
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	for access to the USB interface of a built-in device without having to open the control cabinet, mounting on standard rail possible, suitable for standard USB interfaces
Note:	TP1500 Comfort Outdoor, TP700 Comfort Outdoor: Observe the temperature range
<b>last modified:</b>	12/16/2020 