
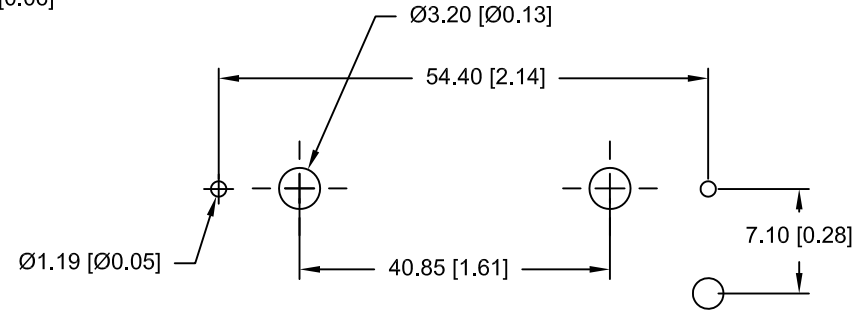
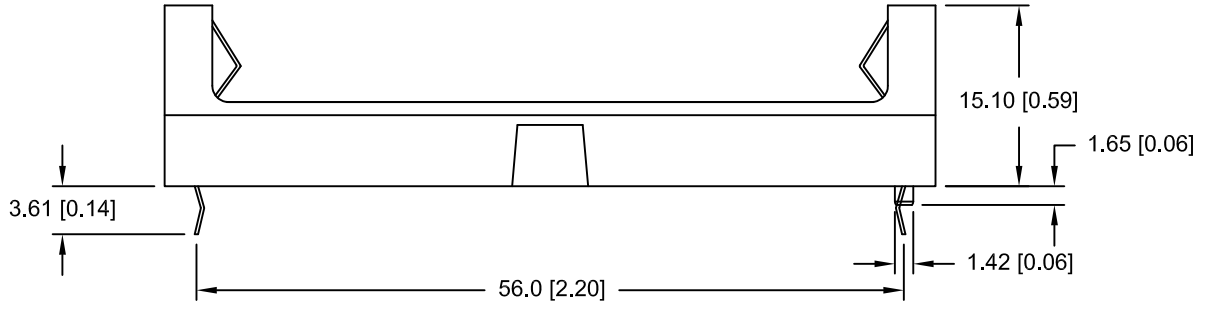
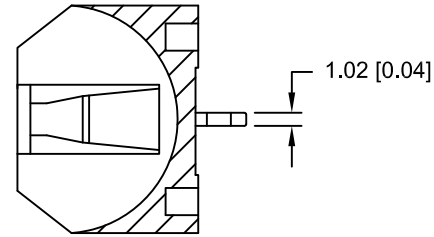


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/17/14	C	Updated to ROHS 2 compliant	T.B.	B.S.	
04/21/17	D	Dim. 56.0 was 54.40	T.B.	B.S.	

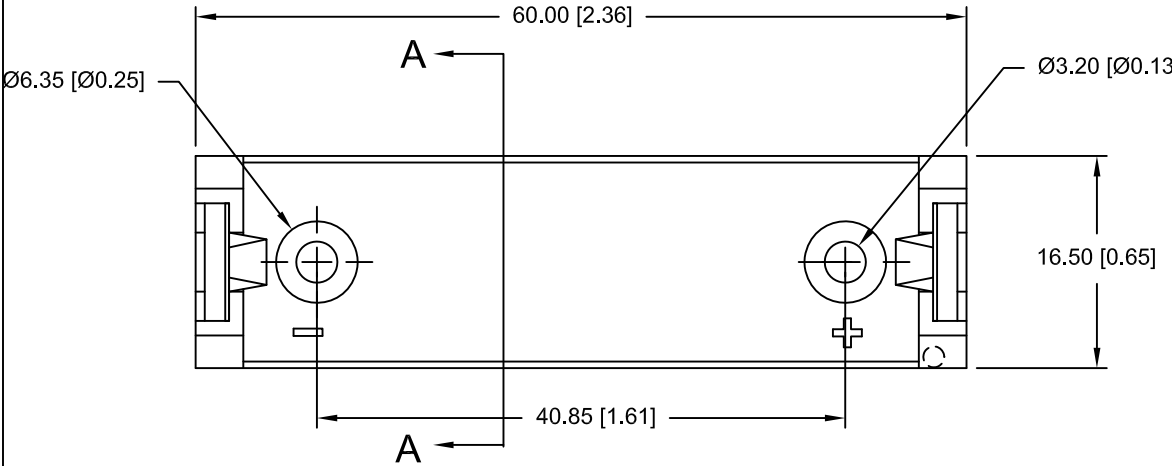

PC BOARD LAYOUT

NOTES:
 Material: Self-extinguishing Thermoplastic Polyester, color black
 Temperature Range: -40°C to +180°C
 Contacts: 302 Stainless Steel Spring Temper, Nickel Plated
 Flammability Rating: UL 94V-0
 Dielectric Strength: 560 Volts/Mil. at 25°C for 5 Sec.
 Resistance to Solvents: Xylene, ethyl, butyl, methyl & toluene
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.02)		Scale 2=1	Drawn By T.S. Approved By T.B.
Fractional ± .8 (.03)	Title AA BATTERY HOLDER		
Angular ± 3°	Date 04/21/17	Drawing Number 6S-AA	