



UNIT:MM


2000 ± 50

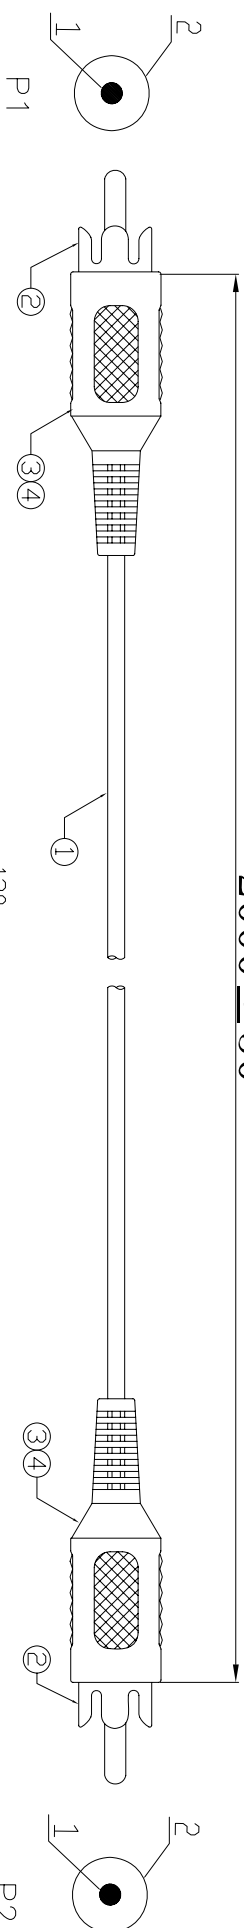

PIN ASSIGNMENT:

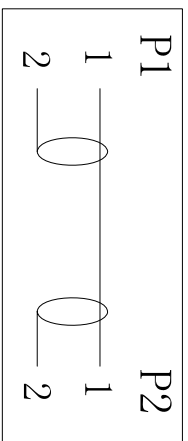

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

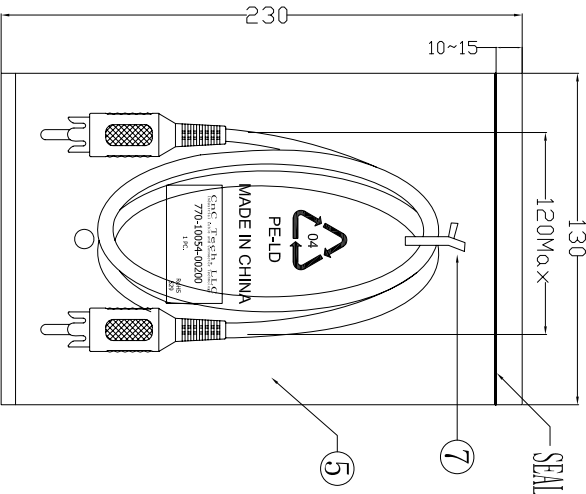

1PC/PE BAG

⑦	TIE	1	BLACK L=80mm
⑥	PE BAG	1/10	CLEAR SIZE: 230*300*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS" 及印生产周期,有透气孔.
⑤	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC" 及印生产周期,有透气孔.
④	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*10mm
③	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NIM-006)
	OUT JACKET	6.6g	PVC-40P COLOR:BLACK,(Mould NO.WM-009)
②	CONN	2	RCA PLUG MALE BLOSSOM TYPE NI-PLATED INSULATOR COLOR:BROWN
①	CABLE	1	T.C (10/0.12+28/0.12)*1C OD3.0MM JACKET PVC COLOR BLACK L=2000± 10mm.
NO.	NAME	QTTY	SPECIFICATION

Cnc Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	770-10054-00200
DECIDE BY		DATE	2012-02-06
VERSIONS/EDITION	A/0	PROJECTION	