



15 POSITION





.470

.560

.430

.520


HOLE PATTERN SHOWN ARE FOR MALE


UNITS = inch

★ TYP.

SUGGESTED SIZE MAY NOT BE SUITABLE FOR ALL APPLICATIONS

Rohs Compliant	DO) NOT SC.	ALE FROM DRA	WING
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED. COPIED OR USED AS THE	NorComp	SCALE: NTS	SHEET OF 2 4	REV 16
THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. 08/03/2018	NorComp	DWG NO.	780-MYY-113RY)	/1



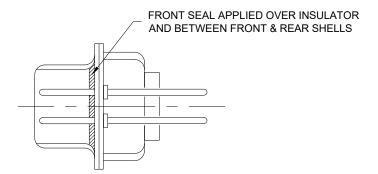




RoHS C	FOMPLIANT		D	<u>o not sc</u>	ALE FROM DRAW	MNG
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT	DRAWN: J. KADEL	NorComp	SCALE: NTS	SHEET OF 3 4	REV 16	
THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DATE: 08/03/2018	NorComp	DWG NO.	780-MYY-113RYY1		

ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS

01X 0.098" (BOARD SIDE)

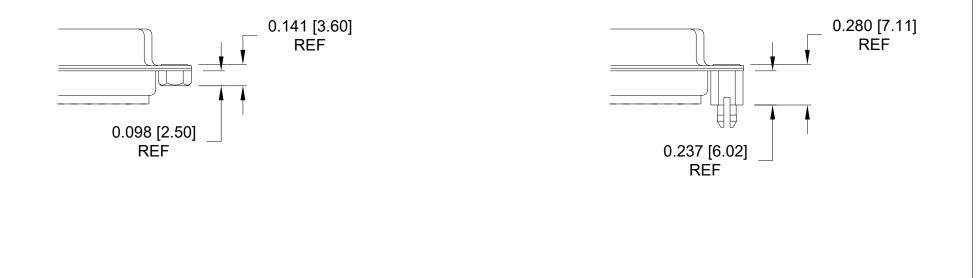

05X 0.237" (BOARD SIDE)

