




**Tolerances**

- 1-20=+/-0.2
- 20-30=+/-0.3
- 30-40=+/-0.4
- 40-50=+/-0.5
- 50-100=+/-0.75
- 100-300=+/-1.5
- Angles=+/-1

**Dimensions are in Millimeters**

Revisions Description/Approved/Date	Approved M.E.H.	Date 2020-02-26
	Checked P.A.B.	Date 2020-02-26
	Drawn R.D.P.	Date 2020-02-26
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 50 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		

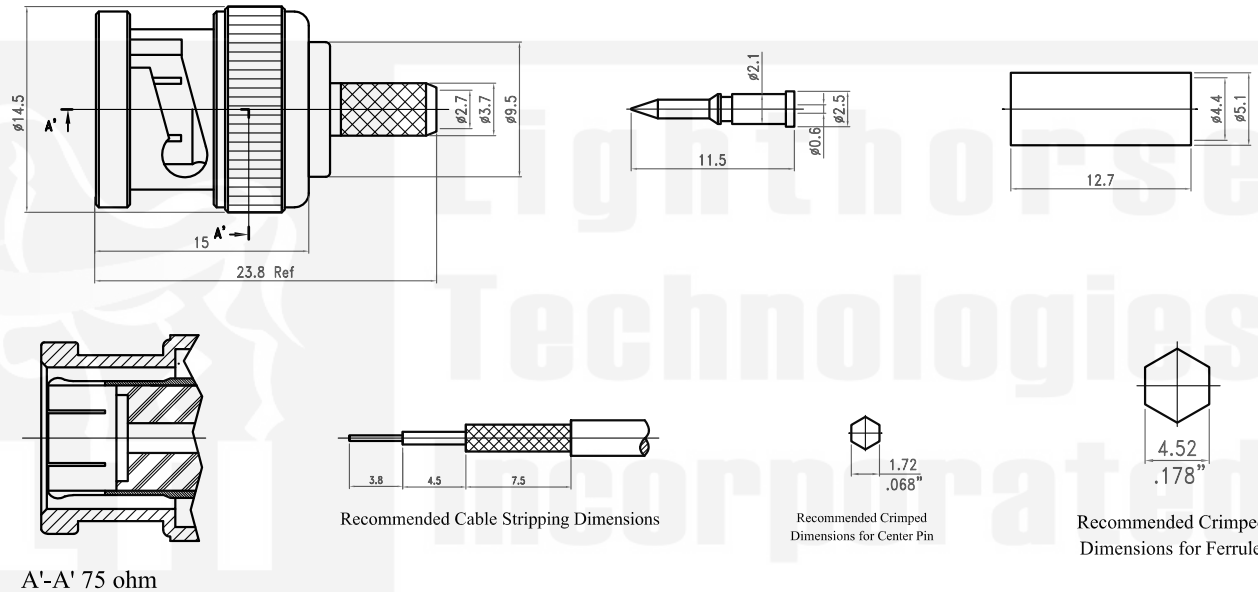

ITEM	MATERIAL	FINISH
Connector Body	Brass/Diecast Shell	Nickel
Center Contact: M	Brass	Gold
Insulation	PTFE	None
Ferrule	Brass	Same as body
Gasket	n/a	n/a
Hex Nut	n/a	n/a
Lock Washer	n/a	n/a

**Lighthouse Technologies, Inc.**

9511 RidgeHaven Ct, Suite B  
San Diego, California 92123

Part Number:  
**LTI-7BMSM11ND-M59**

Description 75ohm BNC Straight Crimp Plug for Mini RG-59 Cable		
Brass Body with Nickel Plating, Teflon Dielectric.		
Scale NTS	Drawing No.	File Name