



Circuit breaker 3VA5 UL Frame 250 Breaking capacity class M 35kA @ 480 V 4-pole, line protection TM210, FTFM, In=40A Overload protection Ir=40A fixed Short-circuit protection li=10 x In N conductor Unprotected Without connection

| Model                                                                                                                 |                             |
|-----------------------------------------------------------------------------------------------------------------------|-----------------------------|
| product brand name                                                                                                    | SETRON                      |
| product designation                                                                                                   | Molded-case circuit breaker |
| product designation / according to UL file                                                                            | MFAS                        |
| Product version                                                                                                       | System protection           |
| design of the load switch / acc. to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type) | Yes                         |
| design of the overcurrent release                                                                                     | TM210                       |
| protection function of the overcurrent release                                                                        | LI                          |
| number of poles                                                                                                       | 4                           |
| General technical data                                                                                                |                             |
| Tension assignée d'isolement Ui                                                                                       | 800 V                       |
| Max. rated operational voltage Ue with AC 50/60Hz                                                                     | 690 V                       |
| Max. rated operational voltage Ue with DC                                                                             | 1 000 V                     |
| power loss [W] / maximum                                                                                              | 20.4 W                      |
| Active power loss / for rated value of the current / at AC / in hot operating state / per pole                        | 6.8 W                       |
| mechanical service life (switching cycles) / typical                                                                  | 20 000                      |
| Electrical endurance (switching cycles) / at AC-1 / at 380/415 V 50/60 Hz                                             | 8 000                       |
| Electrical endurance (switching cycles) / at AC-1 / at 690 V 50/60 Hz                                                 | 4 000                       |
| electrical endurance (switching cycles) / at 480 V                                                                    | 8 000                       |
| electrical endurance (switching cycles) / at 600 V                                                                    | 4 000                       |
| Neutral conductors / upgradeable/retrofitable                                                                         | No                          |
| ground-fault monitoring version                                                                                       | Without                     |
| product function                                                                                                      |                             |
| • communication function                                                                                              | No                          |
| • other measurement function                                                                                          | No                          |
| Current                                                                                                               |                             |
| marking / acc. to UL 489 / 100%-rated breaker                                                                         | No                          |
| Max. rated operational current of the frame size                                                                      | 250 A                       |
| Courant permanent assigné Iu                                                                                          | 40 A                        |
| Switching capacity according to IEC 60947                                                                             |                             |
| switching capacity class of the circuit breaker                                                                       | M                           |
| breaking capacity maximum short-circuit current (Icu)                                                                 |                             |
| • at 240 V                                                                                                            | 85 kA                       |
| • at 415 V                                                                                                            | 55 kA                       |

|                                                                                                                                                                                                                  |                                                                                                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• at 690 V</li> </ul>                                                                                                                                                     | 7 kA                                                                                                                                                           |
| breaking capacity operating short-circuit current (Ics) <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 415 V</li> <li>• at 690 V</li> </ul>                                                     | 85 kA<br>55 kA<br>7 kA                                                                                                                                         |
| short-circuit current making capacity (Icm) <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 415 V</li> <li>• at 690 V</li> </ul>                                                                 | 187 kA<br>121 kA<br>11.9 kA                                                                                                                                    |
| design of short-circuit protection                                                                                                                                                                               | For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter |
| <b>Switching capacity according to UL 489</b>                                                                                                                                                                    |                                                                                                                                                                |
| breaking capacity current <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 480 V</li> <li>• at 600 Y/347 V</li> </ul>                                                                             | 85 kA<br>35 kA<br>18 kA                                                                                                                                        |
| <b>Adjustable parameters</b>                                                                                                                                                                                     |                                                                                                                                                                |
| Adjustable response value current / I <sub>g</sub> min.                                                                                                                                                          | 40 A                                                                                                                                                           |
| Adjustable response value current / I <sub>g</sub> min.                                                                                                                                                          | 40 A                                                                                                                                                           |
| Adjustable response value current / I <sub>i</sub> min.                                                                                                                                                          | 400 A                                                                                                                                                          |
| Adjustable response value current / I <sub>i</sub> max.                                                                                                                                                          | 400 A                                                                                                                                                          |
| design of the N-conductor protection                                                                                                                                                                             | Without                                                                                                                                                        |
| Ground fault protection / tripping switchable / I <sub>2t</sub> =ON/OFF                                                                                                                                          | No                                                                                                                                                             |
| <b>Mechanical Design</b>                                                                                                                                                                                         |                                                                                                                                                                |
| height [in]                                                                                                                                                                                                      | 7.3 in                                                                                                                                                         |
| Height                                                                                                                                                                                                           | 185 mm                                                                                                                                                         |
| width [in]                                                                                                                                                                                                       | 5.5 in                                                                                                                                                         |
| Width                                                                                                                                                                                                            | 140 mm                                                                                                                                                         |
| depth [in]                                                                                                                                                                                                       | 3.3 in                                                                                                                                                         |
| depth                                                                                                                                                                                                            | 83 mm                                                                                                                                                          |
| <b>Connections</b>                                                                                                                                                                                               |                                                                                                                                                                |
| arrangement of electrical connectors / for main current circuit                                                                                                                                                  | Without connection                                                                                                                                             |
| type of electrical connection / for main current circuit                                                                                                                                                         | Without                                                                                                                                                        |
| <b>Auxiliary circuit</b>                                                                                                                                                                                         |                                                                                                                                                                |
| number of CO contacts / for auxiliary contacts                                                                                                                                                                   | 0                                                                                                                                                              |
| <b>Accessories</b>                                                                                                                                                                                               |                                                                                                                                                                |
| product extension / optional / motor drive                                                                                                                                                                       | Yes                                                                                                                                                            |
| <b>Environmental conditions</b>                                                                                                                                                                                  |                                                                                                                                                                |
| protection class IP / on the front                                                                                                                                                                               | IP40                                                                                                                                                           |
| ambient temperature <ul style="list-style-type: none"> <li>• during operation / minimum</li> <li>• during operation / maximum</li> <li>• during storage / minimum</li> <li>• during storage / maximum</li> </ul> | -25 °C<br>70 °C<br>-40 °C<br>80 °C                                                                                                                             |
| <b>Certificates</b>                                                                                                                                                                                              |                                                                                                                                                                |
| reference code / acc. to IEC 81346-2                                                                                                                                                                             | Q                                                                                                                                                              |
| certificate of suitability / as approval for NAVAL (no combat vessels) / supplement SB                                                                                                                           | No                                                                                                                                                             |
| <b>General Product Approval</b>                                                                                                                                                                                  |                                                                                                                                                                |



[Miscellaneous](#)



| EMC | Declaration of Conformity | Shipping Approval | other |
|-----|---------------------------|-------------------|-------|
|-----|---------------------------|-------------------|-------|



[Miscellaneous](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA5240-5ED41-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3VA5240-5ED41-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA5240-5ED41-0AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA5240-5ED41-0AA0)

Tender specifications

<http://www.siemens.com/specifications>

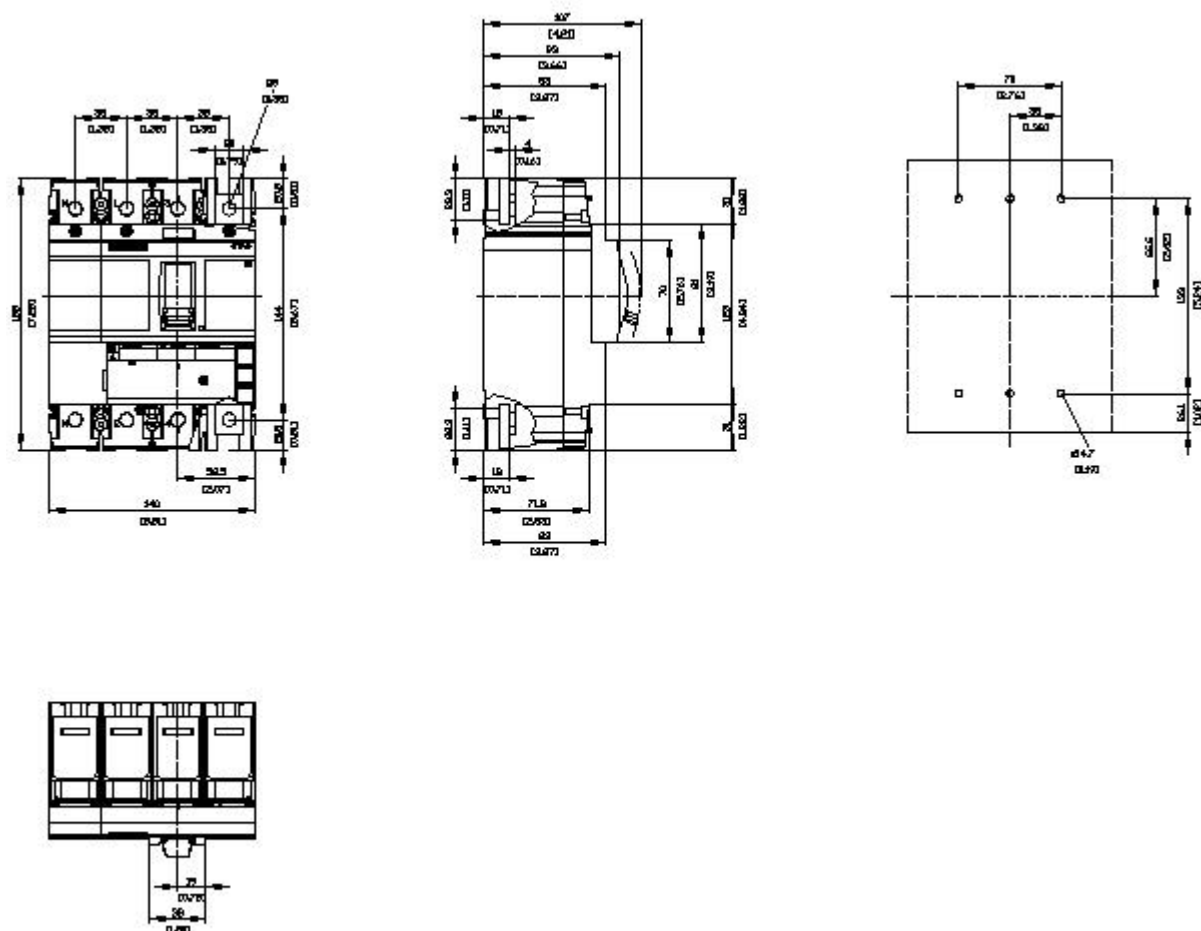

last modified:

12/20/2020

