



### Main

Range of Product	Harmony GTU
Product or Component Type	Base unit
Device short name	Open Box
Range Compatibility	Harmony GTU
[Us] rated supply voltage	12...24 V DC power supply

### Complementary

Integrated connection type	Ethernet TCP/IP 2 RJ45 COM1 serial link RJ45 RS485 110...115200 bit/s COM2 serial link SUB-D 9 RS232C/RS422/RS485 110...115200 bit/s Auxiliary port terminal block USB 2.0 port mini B USB DVI-D video port DVI-D Microphone mini-jack USB 2.0 port 3 USB type A
Communication port protocol	Modbus Modbus TCP/IP Uni-Telway
Operating system	Windows 10 IoT Enterprise 32bit
Software package	Internet Explorer .NET framework 4.0 Multimedia player
Processor name	Intel X86
Data storage equipment	32 GB CFast card
Port Ethernet	10BASE-T/100BASE-TX/1000BASE-T
Memory description	512 kB NVRAM backup memory 4 GB RAM internal
Number of slots	1 SD card 2 Cfast card
Realtime clock	Built-in
Local signalling	, multi-colour LEDstatus
Type of cooling	Natural convection
Width	7.40 in (188 mm)
Height	5.16 in (131 mm)
Depth	1.77 in (45 mm)
Net Weight	1.98 lb(US) (0.9 kg)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

Standards	CSA C22.2 No 142 ANSI/ISA 12-12-01 UL 508 Class I division 2 CSA C22.2 No 213 IEC 61132-2
Product certifications	CE CULus ATEX IEC-Ex RCM DNV-GL KC CUL EAC
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-4...140 °F (-20...60 °C)
Pollution degree	2 EN 61131-2 Ed.3
Relative Humidity	10...90 % non-condensing
Vibration resistance	9.8 m/s <sup>2</sup> 9...150 Hz) EN/IEC 61131-2
Electromagnetic compatibility	Electrostatic discharge immunity testlevel 3 EN/IEC 61000-4-2

## Ordering and shipping details

Category	22567-MAGELIS HMI GTU
Discount Schedule	MC2
GTIN	3606481893222
Nbr. of units in pkg.	1
Package weight(Lbs)	2.48 lb(US) (1.126 kg)
Returnability	No
Country of origin	ID

## Packing Units


Unit Type of Package 1	PCE
Package 1 Height	5.31 in (13.5 cm)
Package 1 width	8.27 in (21 cm)
Package 1 Length	10.24 in (26 cm)
Unit Type of Package 2	P12
Number of Units in Package 2	16
Package 2 Weight	70.55 lb(US) (32.0 kg)
Package 2 Height	16.93 in (43 cm)
Package 2 width	31.50 in (80 cm)
Package 2 Length	47.24 in (120 cm)
Unit Type of Package 3	S04
Number of Units in Package 3	4
Package 3 Weight	12.35 lb(US) (5.6 kg)
Package 3 Height	11.81 in (30 cm)
Package 3 width	15.75 in (40 cm)
Package 3 Length	23.62 in (60 cm)

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

## Dimensions

### External Dimensions

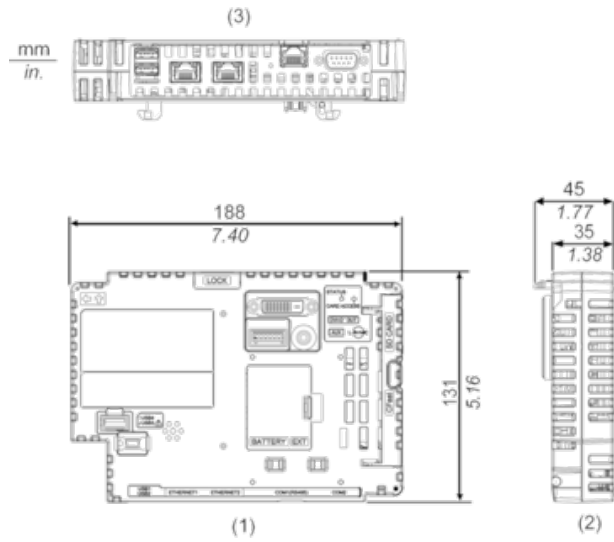

- 1 Front
- 2 Left
- 3 Bottom