

	Ŧ	Q	т	C C



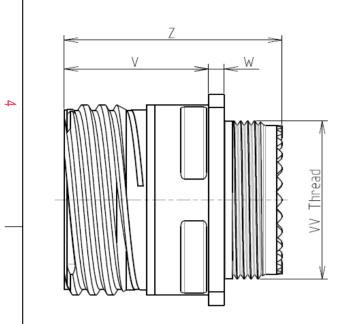

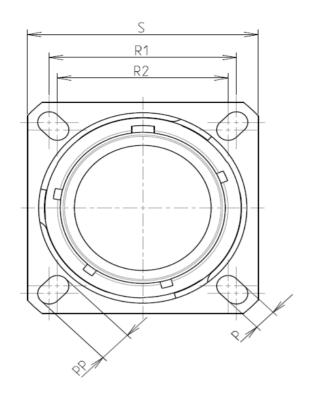

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

: 19.49 g ± 10%

8D 0

G

13

Ζ

04


S


F

С

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M18x1-6g			

Е



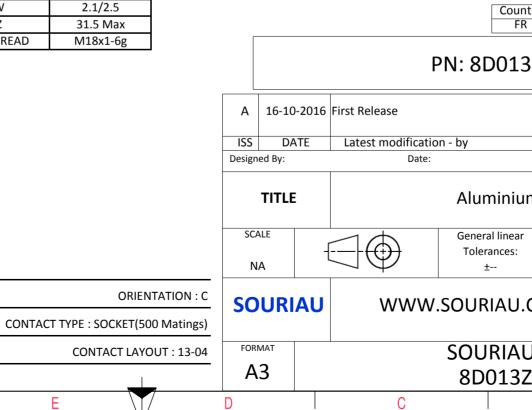

	Φ		A			
					4	
AS EX4	AMPLE				3	
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)						
untry FR	Jurisd	liction & Con Not Listed			2	
.3Z04SC						
				MOD N°		
um	CUSTOMER DRAWING Receptacle 8D series					
ar	NPRDS / PROJECT					
	859					
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N°			SHEET		
SZU	4SC-C B		A	1/2	J	

	工	G	н т	т	D	0	
		Contact Layout					Panel Cutout
4		X D D D D D D D D				SQUARE FLANGE RECEPTACLE (T REAR MOUNTING	
	Cont position A B C D Shell Arrangement N size no. 13 -4	(Insert arrangement 13-4) Location act V-axis (mm) (mm) +.000 (0.00) +.150 (3.81) +.146 (3.71) +.035 (0.89) +.000 (0.00) 083 (2.11) 146 (3.71) +.035 (0.89)			<u>م</u>		
ယ							Dim ØA ØAA R1 ØT
						due to a use o the Specifications i	ot be liable for any f the Products whi ssued by either of nal recommendati
2						Р	Country FR N: 8D013Z
						-2016 First Release TE Latest modification Date:	- by
-					SCALE NA		Aluminium General linear Tolerances: ±
					FORMAT		SOURIAU.C
			1		A3	1	8D013Z0
	Н	G	F	E	D	С	

