



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 19

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

: 31.07 g ± 10%

8D 0

G

19

Ζ

11

Ρ

F

D


Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	29.36			
R2	26.97			
S	36.5±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M28x1-6g			


ORIENTATION : D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 19-11



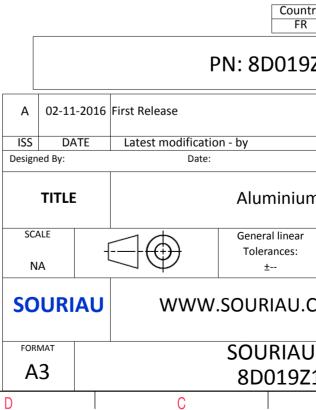

	σ	I	Þ					
		I]			
					4			
1	10/2	N W WAR						
9								
	0	-						
	<u> </u>							
		1						
		1						
S FY/	AMPLE				3			
LAF								
r any i	non-conformit	ty or dam	age					
s which does not comply with er of the Parties or by a third party								
	on, technical n		F 2. 1					
untry	luricd	liction & (Control List] _				
FR	54130	Not List			2			
97 [.]	11PD							
				MOD N°				
		CUSTO	MER DRAWING					
um	n Receptacle 8D series							
ar :		NPR	DS / PROJECT					
		Thi	859 s document is the pro	operty of	1			
J.CC	DM		SOURIAU must not be reprodu					
			municated without p					
U I	DRG N°			SHEET				
Z1	1PD-C			1/2				
	В		А					

