

| т | ۵ | н п | т | 0 |
|---|---|------------|---|---|
| | | | | |



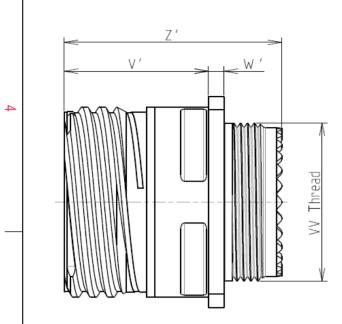



Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

| - | | | | | |
|---|--|--|--|--|--|
| | -Shell Material | : Composite | | | |
| | -Shell Plating | : Nickel | | | |
| | -Insulator | : Thermoplastic | | | |
| | -Contacts | : Copper Alloy | | | |
| | -Seals & Grommet | : Silicon Elastomer | | | |
| N | -Contact Plating | : Gold over copper Alloy 0.8µm minimum | | | |
| | -Durability | : 500 Mating cycles | | | |
| | -Delivered with Souriau contacts and Accessories | | | | |
| | -Temperature Range | <u>-</u> -65℃ to +200℃ | | | |
| | -Salt Spray | : 2000 hours | | | |
| | -Mass | : 30.1 g ± 10% | | | |
| | | | | | |
| | | | | | |
| | | | | | |

8D 0

G

21

М

41


Ρ

F

А

| P 3.25±0.2 PP 4.93±0.2 R1 31.75 R2 29.36 S 39.7±0.3 V' 18.7+1.4/-0 W' 2.1/4.35 |
|--|
| R1 31.75 R2 29.36 S 39.7±0.3 V' 18.7+1.4/-0 |
| R2 29.36 S 39.7±0.3 V' 18.7+1.4/-0 |
| S 39.7±0.3 V' 18.7+1.4/-0 |
| V' 18.7+1.4/-0 |
| |
| \\\/' 21/425 |
| 2.1/4.33 |
| Z' 32 Max |
| /V THREAD M31x1-6g |

Е

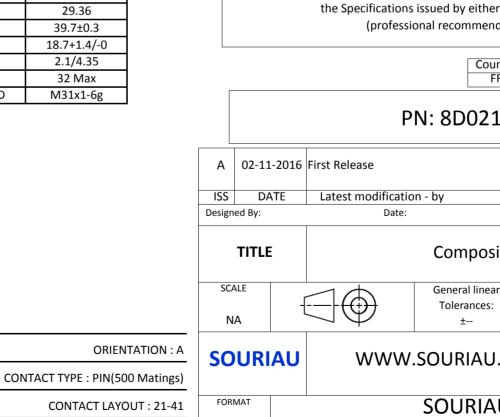

A3

D

| 0 | | Φ | | ⊳ | |
|---|------------------------------------|------|----------------------------|--------------|---|
| | | | | | 4 |
| LAY | OUT SHOWN AS EXA | MPLE | | | 3 |
| SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\\hline FR \qquad Not Listed}$ PN: 8D021M41PA | | | | | 2 |
| rst Release | | | | | - |
| Latest modificatio | n - by | | | MOD N° | |
| Date: CUSTOMER DRAWING Composite Receptacle 8D series | | | | | |
| $\exists \bigoplus$ | General linear Tolerances: ± | | NPRDS / PROJ 859 | ECT | 1 |
| WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission | | | | | |
| | SOURIAU I 8D021M4 | | | SHEET 1/2 | |
| С | | B | | A | |
| | | | | | |

| | Т | Q | IL | п | D | 0 | |
|----------|--|---|----|---|-------------------------|---|------------------------------|
| | | Contact Layout | | | | Ρ | anel Cutout |
| 4 | < | 31° 23 37° 41' - 13 HOLES 143° - 20 HOLES | | | 8 | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING | |
| | | | | | | ØA. | <u>ØT_</u> |
| ω | Sheil Arrangement Numb size no. cont 21 -41 4: | acts contacts rating location | | | | Dim ØA ØAA R1 ØT | |
| | _ | | | | | | |
| | a | | | | | SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco | roducts whi |
| N | | | | | | | Country FR |
| | | | | | | PN: 8[| D021N |
| | | | | | | 2016 First Release | |
| | | | | | ISS DAT Designed By: | E Latest modification - by Date: | |
| | | | | | TITLE | Сог | mposite |
| _ | | | | | SCALE NA | | eral linear erances: ± |
| | | | | | SOURIA | WWW.SOU | RIAU.CO |
| | | | | | FORMAT A3 | | JRIAU 021M4 |
| | Н | G | F | E | D | C C | |

