
	m		0				
Z'							
Keying S CHARACTERISTICS	Shown as example		LAYOUT SHO	DWN AS EXAMPLE			
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer Contact Plating : Cold over conner Alloy 0.8µm minimum	DimNominalØS29.4 MaxZ'31.5 MaxVV THREADM18x1-6g	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)					
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C		A 18-10-2016	FR Not Listed PN: 8D513M04SE A 18-10-2016 First Release				
-Salt Spray : 2000 hours - Mass : 20.9 g ± 10%		ISS DATE Designed By:	Latest modification - by Date:		USTOMER DRAWING	MOD N°	
		TITLE		Composite Plug 8D	series		
BASIC SERIES: 8D 5 - 13 M 04 S SHELL TYPE : Plug with RFI Shielding - 13 M 04 S	E	SCALE NA		ral linear rances: ±	NPRDS / PROJECT 859 This document is the prop	erty of	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13	ORIENTATION : E CONTACT TYPE : SOCKET(500 Matings)						
PLATING : M = Nickel	CONTACT LAYOUT : 13-04	FORMAT A3		JRIAU DRG N° 513M04SE-C		SHEET 1/2	
H G F	E	D	C	В	A		

-	Ŧ	۵	т	m		0	
		Contact Layout					
4	ж.	$ \begin{array}{c} $					
	Conta position A B C D Shell Arrangement N no. c 13 -4	+.000 (0.00) +.150 (3.81) +.146 (3.71) +.035 (0.89) +.000 (0.00) 083 (2.11) 146 (3.71) +.035 (0.89)					
ယ							
	F						
						SOURIAU shall not be liable fo due to a use of the Product the Specifications issued by eith (professional recomme	ts wł ner o
N							ountr FR
						PN: 8D51	131
_					A 18-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
					TITLE	Con	npc
→					SCALE NA	General line Tolerances ±	
					SOURIAU	WWW.SOURIAU.	
					FORMAT A3	SOURI/ 8D513	
L	Н	G	F	E	D	C	

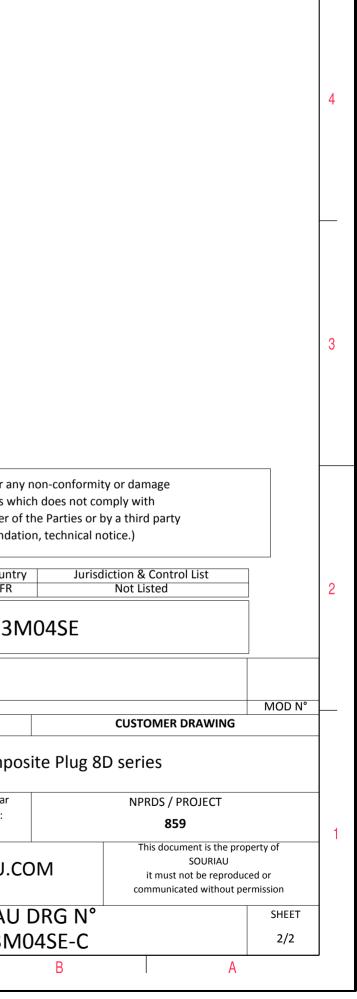

 \triangleright

σ