


ET-031-10-13-H1

Peltier Cooler Module

Data sheet

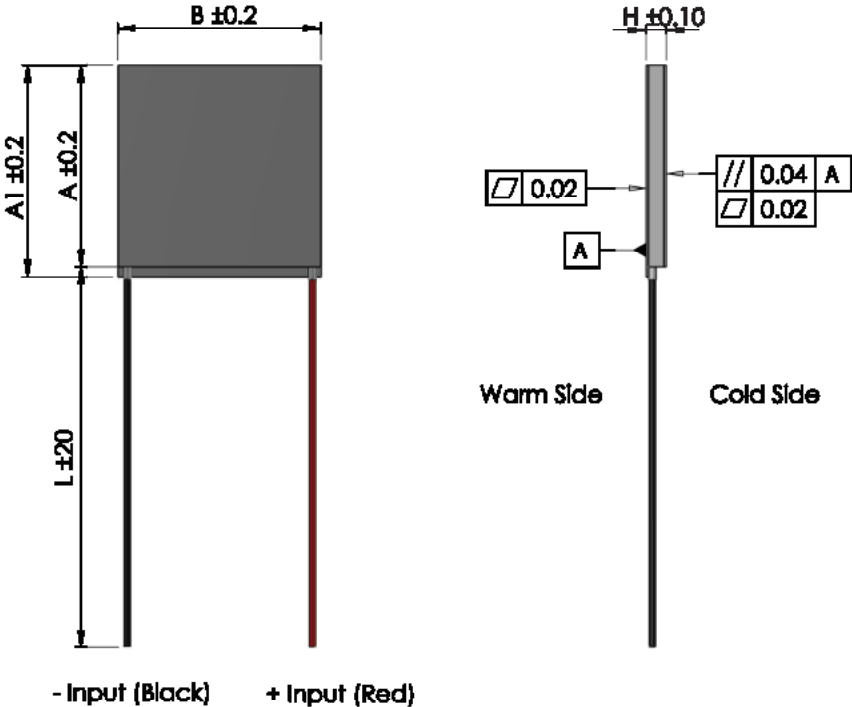

| | | |
|-------------------|-------|-----|
| I_{max} | [A] | 4.0 |
| V_{max} | [Vdc] | 3.9 |
| $P_c \text{ max}$ | [W] | 8.6 |
| ΔT_{max} | [°C] | 73 |
| A | [mm] | 15 |
| A1 | [mm] | 15 |
| B | [mm] | 15 |
| H | [mm] | 3.6 |
| L | [mm] | 100 |





- (At hot side temperature $T_h = 25^\circ\text{C} / 298\text{K}$, under dry N_2)
- $P_c \text{ max}$ = Cooling power at $\Delta T = 0$ and $I = I_{max}$
- ΔT_{max} = Temperature difference at $I = I_{max}$ and $P_c = 0$
- Max hot side temperature $T_h = 90^\circ\text{C}$ for best long term performance
- Max mounting pressure: 1.5MPa
- Wires: UL1569, 300V, 105°C



ET-031-10-13-H1

Peltier Cooler Module

Data sheet - At hot side temperature 25°C

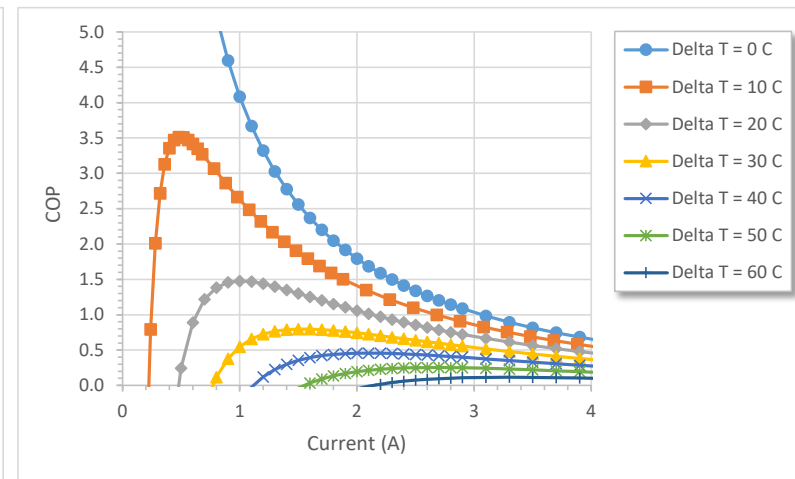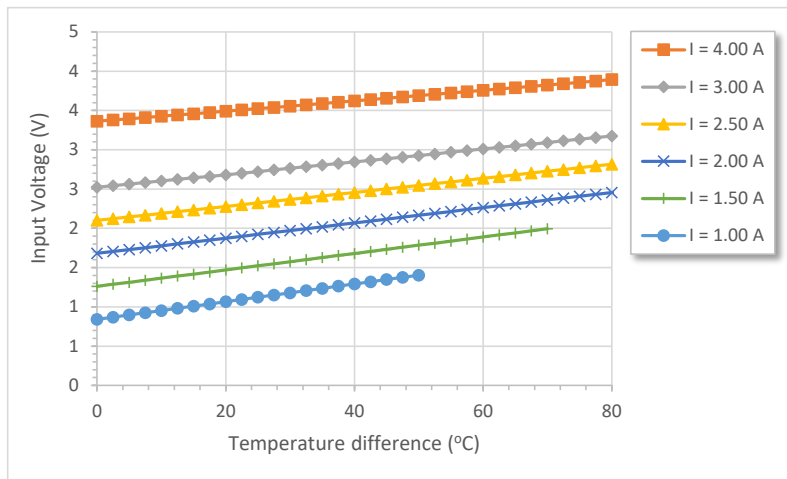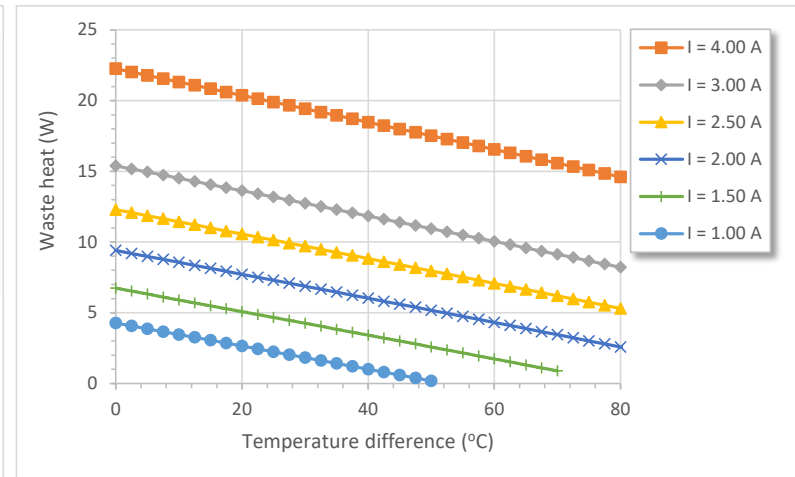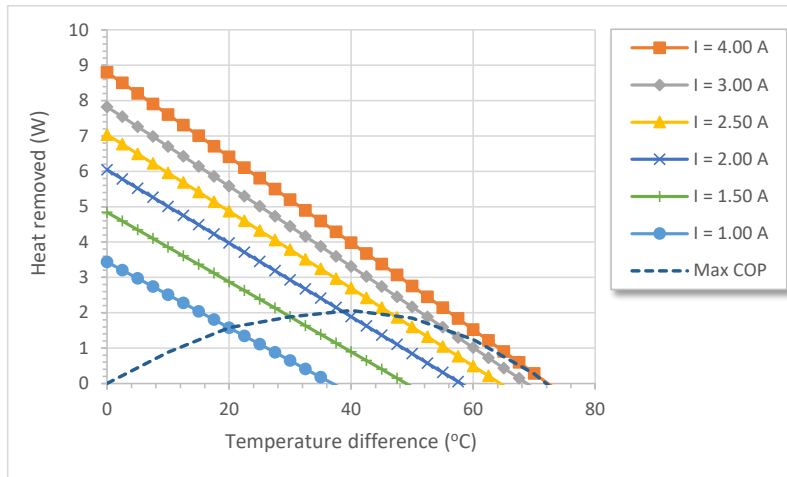





*Note - Waste heat = Heat out of hot side



ET-031-10-13-H1

Peltier Cooler Module

Data sheet - At hot side temperature 50°C

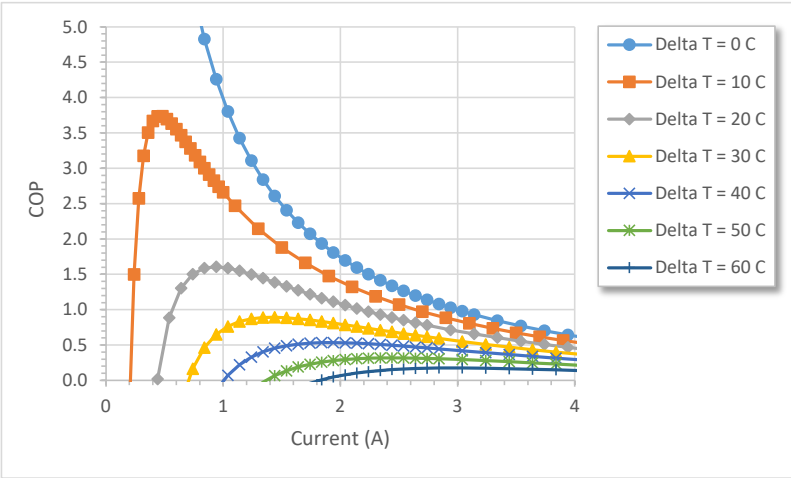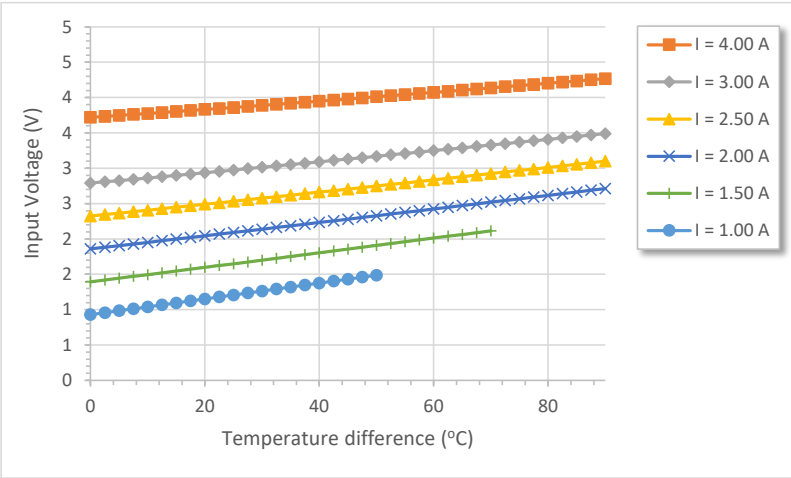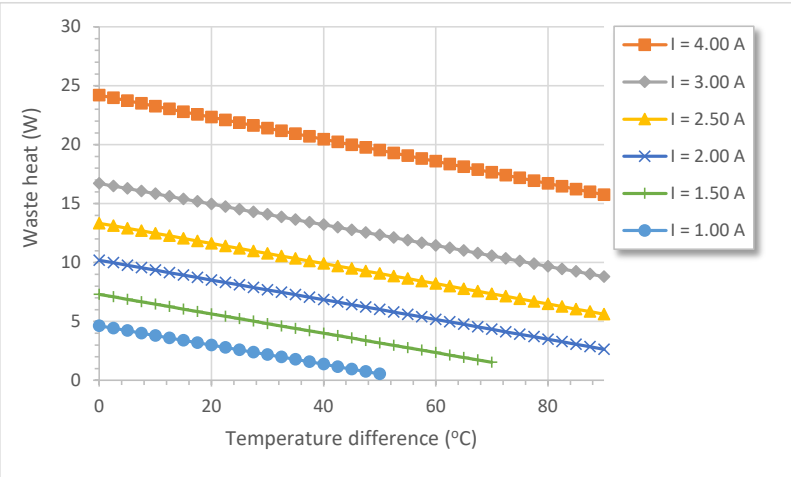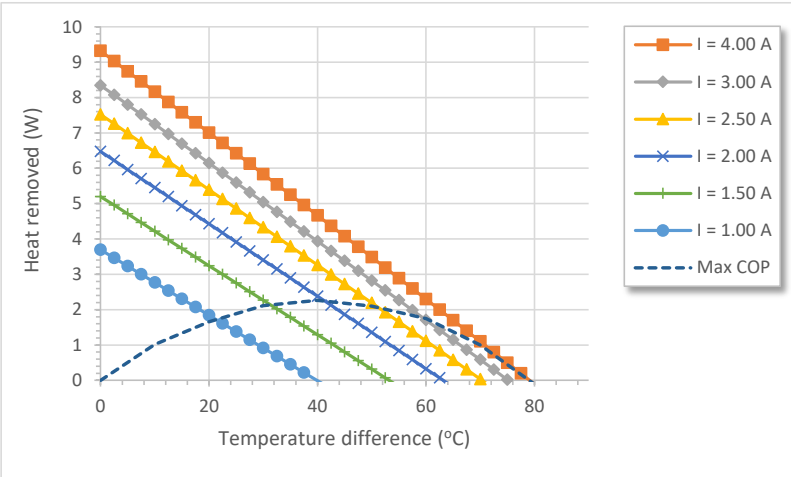





*Note - Waste heat = Heat out of hot side



ET-031-10-13-H1

Peltier Cooler Module

Data sheet - At hot side temperature 75°C

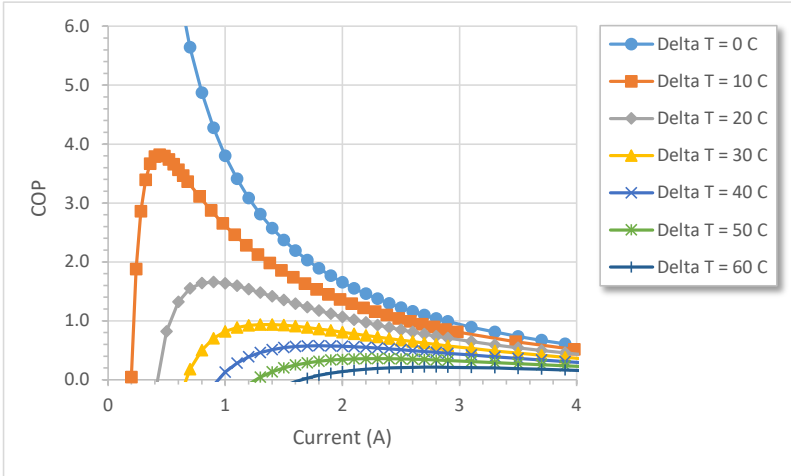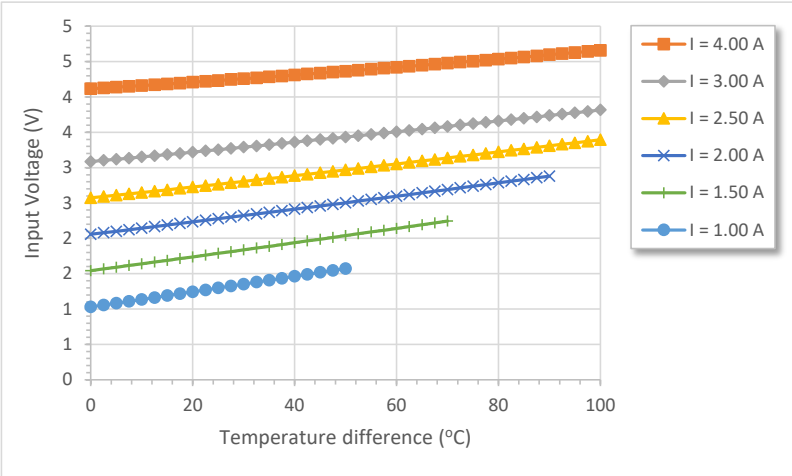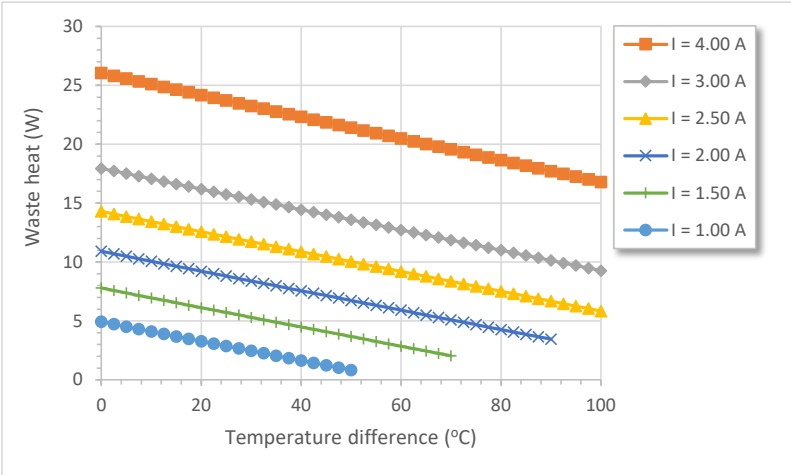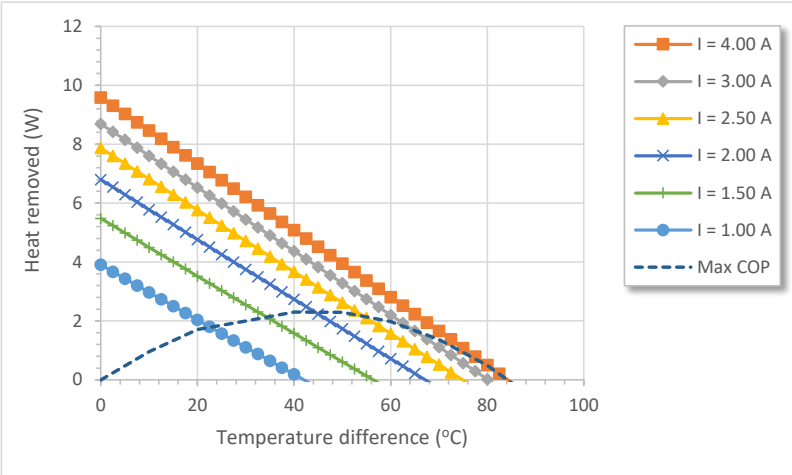

*Note - Waste heat = Heat out of hot side

