




DIN 35mm

Features

- 3Ø - 3 Wire, 3Ø - 4 Wire input
- Monitors Under voltage, Over voltage, Under frequency, Over frequency, Phase asymmetry, Phase failure, Phase sequence
- True RMS measurement
- Power ON delay, Trip time delay and Recovery time delay
- Adjustable switching hysteresis
- Two Alarm relays with NO or NC operation selectable

Certification :  

Display specifications

Type	Digital
Display	Liquid Crystal Display
No. of LED	3
No. of push button	3

LED Indication

LED1 (Green)	Power ON
LED2 (Red)	Relay1 (Continuously ON after trip)
LED3 (Red)	Relay2 (Continuously ON after trip)

Input specifications

Functions	
Measurements	Under voltage, Over voltage, Under frequency, Over frequency, Phase asymmetry, Phase failure, Phase sequence
Time setting	Power on delay, Trip time delay and Recovery time delay
Alarm indications	Trip
Latching	Selectable
Reset	Auto / Manual
Measuring range	3Ø - 3 wire, 3Ø - 4 wire
Measuring Range (RMS Value)	280 to 600V AC (L - L) [for 3Ø - 3 wire] 160 to 300V AC (L - N) [for 3Ø - 4 wire]
Trip settings	
Under voltage	280 to 600V AC (L-L) [for 3Ø - 3 wire] 160 to 300V AC (L-N) [for 3Ø - 4 wire]
Over voltage	280 to 600V AC (L-L) [for 3Ø - 3 wire] 160 to 300V AC (L-N) [for 3Ø - 4 wire]
Under frequency	45 - 65Hz
Over frequency	45 - 65Hz
Phase Failure	Yes
Phase Sequence	Yes
Phase asymmetry	5 - 99.9%
Trip Time Settings	
Power ON Delay	2 - 99.9sec
Trip Time Delay	0 - 99.9sec
Recovery Time Delay	0 - 99.9sec
Response Time	< 200ms

Input specifications

Hysteresis	
Voltage	1.0V - 99.9V
Frequency	0.2 - 2.0Hz
Asymmetry	2.0 - 20%
Resolution	
Voltage	1V
Frequency	0.1Hz
Accuracy	
Voltage	±1% of full range
Frequency	±0.3Hz
Time	±5% of setting, ±200ms

Output specifications

No. of Relays	2
Type of output (Relay1)	1C / O (SPDT)
Type of output (Relay2)	1C / O (SPDT)
Relay Rating	NO / 5A @ 250V AC NC / 3A @ 250V AC (res)

Auxiliary Supply Specifications

Supply Voltage	Self powered
Operating Range	280 - 600V AC (L-L) 160 - 300V AC (L-N)
VA Rating	30VA max.
Frequency	45 - 65Hz


Environmental specifications

Temperature	Operating Temperature : 0°C to 55°C Storage Temperature : -20°C to +70°C
Humidity (non-condensing)	95% RH
Pollution Degree	
For PCB	2
For Product	3
Degree of protection	IP20


Mechanical Specifications

Mounting	Din Rail
Weight	135 g
Conductor cross section (Solid)	1 x (0.5 to 4)Sq.mm
Conductor cross section sleeved (Stranded)	2 x (0.5 to 1.5)Sq.mm 1 x (0.5 to 2.5)Sq.mm
Screw tightening torque	0.5 NM


Dimensions (All are in mm)

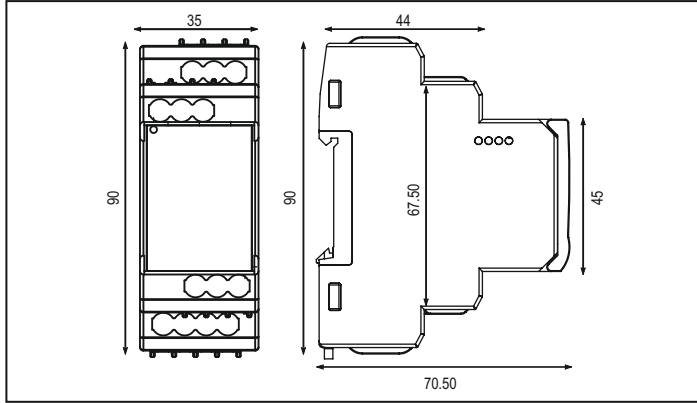

Terminal connection

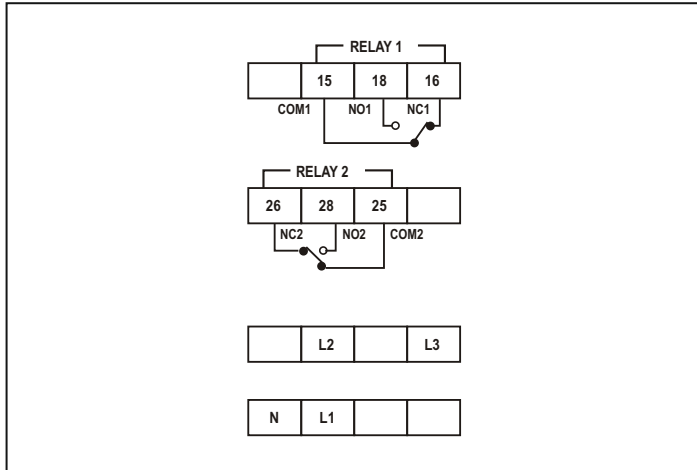

Timing Diagram

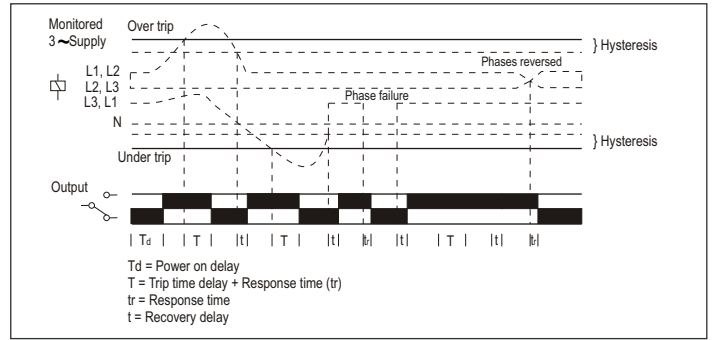

Ordering information

Product code	Operating range	Certification
900VPR-2-300/600V	300-600V AC	CE LISTED