


Modular Style Time Delay Relays

901-0000-281
July 2019, Rev D

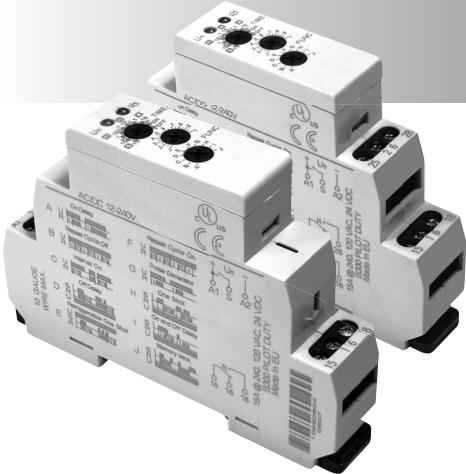

FEATURES

Up to 10 Functions

Broad Timing Range (from 0.1 sec to 10 days)
Contact Configuration
Universal Power Supply
2 LED Status Indicators
Only 17.5 mm Wide
DIN Rail Mountable
RoHS Compliant

BENEFITS


5 Timing Functions Controlled via Supply Voltage
4 Timing Functions Controlled via Trigger Input
1 Timing Function of Memory Latching Relay
Meets Most Timing Requirements
SPDT or DPDT
12 to 240 VAC/VDC
Indicates Coil Status at a Glance
Ideal for Tight Spaces
Easy Installation / No Tools
Environmentally Friendly



This device is designed for connection of 1-phase voltage, 12-240 V AC/DC and must be installed according to norms valid in existing state. Connections must be made according to details in this instruction sheet. Installation, connections, setting and servicing should be performed by qualified electrician staff, who understands this instruction sheet and functions of respective device.

Before starting installation ensure that the main switch is in "OFF" position and there should be no power going to the device. Qualified installer must also ensure the device is being installed into a temperature controlled environment which will guarantee not to exceed the specified maximum operating temperature. For installation use a screwdriver with 2 mm tip.

DESCRIPTION

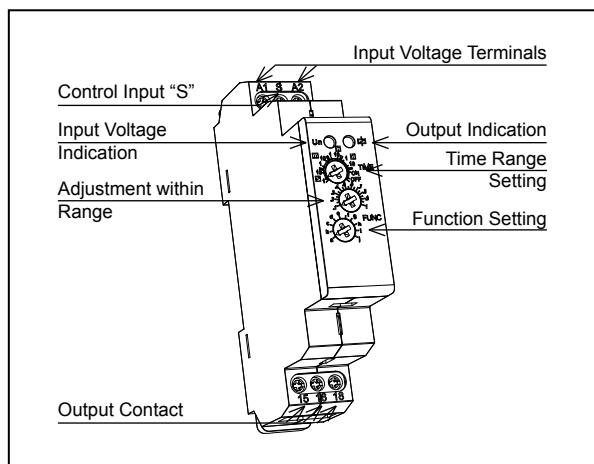


Function	Operation	Timing Chart
A. ON DELAY Power On	When the input voltage U is applied, timing delay t begins. Relay contacts R change state after time delay is complete. Contacts R return to their shelf state when input voltage U is removed. Trigger switch is not used in this function.	U R on off t t t
B. REPEAT CYCLE Starting Off	When input voltage U is applied, time delay t begins. When time delay t is complete, relay contacts R change state for time delay t. This cycle will repeat until input voltage U is removed. Trigger switch is not used in this function.	U R on off t t t t t
C. INTERVAL Power On	When input voltage U is applied, relay contacts R change state immediately and timing cycle begins. When time delay is complete, contacts return to shelf state. When input voltage U is removed, contacts will also return to their shelf state. Trigger switch is not used in this function.	U R on off t t t t
D. OFF DELAY S Break	Input voltage U must be applied continuously. When trigger S is closed, relay contacts R change state. When trigger S is opened, delay t begins. When delay t is complete, contacts R return to their shelf state. If trigger S is closed before time delay t is complete, then time is reset. When trigger S is opened, the delay begins again, and relay contacts remain in their energized state. If input voltage U is removed, relay contacts R return to their shelf state.	U S close open t t t t R on off
E. RETRIGGABLE ONE SHOT	Upon application of input voltage U, the relay is ready to accept trigger signal S. Upon application of the trigger signal S, the relay contacts R transfer and the preset time t begins. At the end of the preset time t, the relay contacts R return to their normal condition unless the trigger signal S is opened and closed prior to time out t (before preset time elapses). Continuous cycling of the trigger signal S at a rate faster than the preset time will cause the relay contacts R to remain closed. If input voltage U is removed, relay contacts R return to their shelf state.	U S close open t t t t R on off
F. FLASHER Starting On	When input voltage U is applied, relay contacts R change state immediately and time delay t begins. When time delay t is complete, contacts return to their shelf state for time delay t. This cycle will repeat until input voltage U is removed. Trigger switch is not used in this function.	U R on off t t t t
G. PULSE GENERATOR	Upon application of input voltage U, a single output pulse of 0.5 seconds is delivered to relay after time delay t. Power must be removed and reapplied to repeat pulse. Trigger switch S is not used in this function.	U R on off t t t t
H. ONE SHOT	Upon application of input voltage U, the relay is ready to accept trigger signal S. Upon application of the trigger signal S, the relay contacts R transfer and the preset time t begins. During time-out t, the trigger signal S is ignored. The relay resets by applying the trigger signal S when the relay is not energized.	U S close open t t t t R on off
I. ON/OFF DELAY S Make/Break	Input voltage U must be applied continuously. When trigger S is closed, time delay t begins. When time delay t is complete, relay contacts R change state and remain transferred until trigger S is opened. If input voltage U is removed, relay contacts R return to their shelf state.	U S close open t t t t R on off
J. MEMORY LATCH S Make	Input voltage U must be applied continuously. Output changes state with every trigger S closure. If input voltage U is removed, relay contacts R return to their shelf state.	U S close open t t t t R on off

TIME RANGES


0.1 - 1s	1 - 10s	0.1 - 1 min	1 - 10 min	0.1 - 1 h

WIRING DIAGRAMS

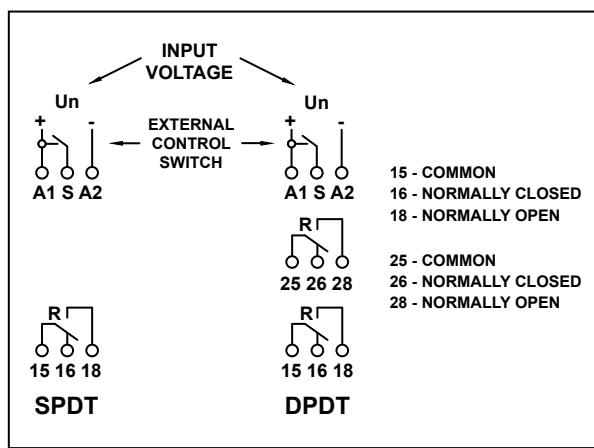

Modular Style Time Delay Relays

901-0000-281
July 2018, Rev C

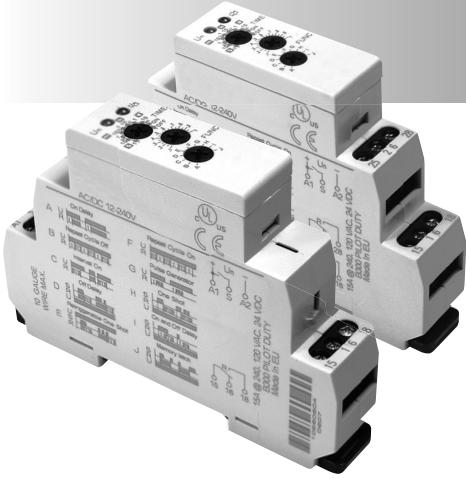


SPECIFICATIONS @ 25°C (UL 508)

OUTPUT CHARACTERISTICS

Number and type of contacts	SPDT or DPDT
Contact material	Silver alloy
Current rating	15 A @ 240 VAC, 240 V 50/60 Hz
	1/2 HP @ 120 V 50/60 Hz
Switching voltage	1 HP @ 240 V 50/60 Hz
	B300 pilot duty
Minimum switching requirement	100 mA
Indication	Red LED
INPUT CHARACTERISTICS	
Voltage range	12 to 240 V 50/60 Hz/ VDC
Operating range (% of nominal)	85% to 110%
Maximum consumption	3 VA (AC) 1.7 W (DC)
Indication	Green LED
TIMING CHARACTERISTICS	
Functions available	10
Time scales	10
Time ranges	0.1 sec to 10 days
Tolerance (mechanical setting)	5%
Repeatability (constant voltage and temperature)	0.2%
Reset time (maximum)	150 ms
Trigger pulse length (minimum)	50 ms
PERFORMANCE CHARACTERISTICS	
Electrical life (operations @ rated current)	100,000 cycles (resistive)
Mechanical life (unpowered)	10,000,000 cycles
Dielectric strength	Input to contacts Between open contacts
	2500 VAC 1000 VAC
Terminal wire capacity	14 AWG (2.1 mm ²)
Terminal torque (maximum)	7.1 lbf in (0.8 Nm)
Field Wiring	75C Conductors
ENVIRONMENT	
Product certifications	UL, CE, RoHS
Ambient air temperature	Storage Operation
	-30 to +70 °C (-22 to +158 °F) -20 to +55 °C (-4 to +131 °F)
Degree of protection	IP 20
Weight	65 grams (2.3 oz)

DIMENSIONS INCHES (MILLIMETERS)

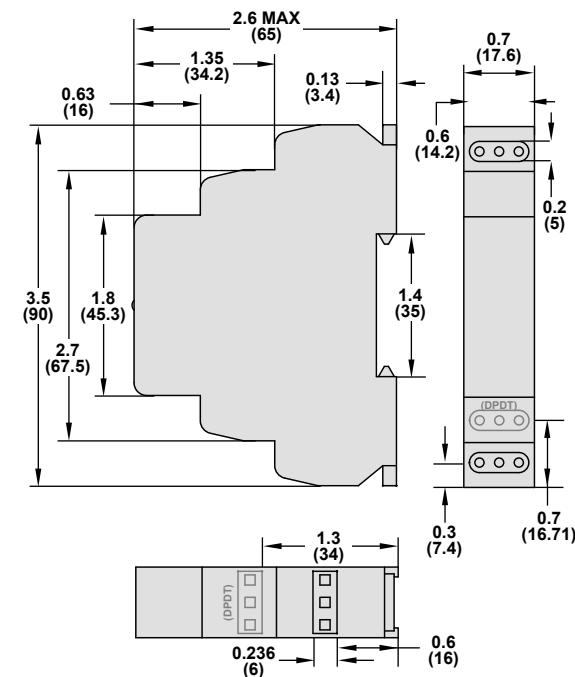

RELAY CONTACT 15 A	LOAD								
						AC1A	C3	AC15	DC1 (24/110/220 V)
AgNi	1000 W					4000 VA	0.9 kW	750 VA	15 A/0.5 A/0.35 A