



Main

| | |
|---------------------------|---|
| Range of Product | Modicon ABE7 |
| Product or Component Type | Sub-base with plug-in electromechanical relay |
| Sub-base type | Output sub-base |
| [Us] rated supply voltage | 19...30 V IEC 61131-2 |
| Number of Channels | 16 |

Complementary

| | |
|--|--|
| Supply voltage type | DC |
| Product Compatibility | ABR7S33 |
| Contacts type and composition | 1 C/O |
| Status LED | Channel status 1 LED per channel Green) Power ON 1 LED Green) |
| Polarity distribution | Volt-free |
| Short-circuit protection | 1 A internal fuse, 5 x 20 mm, fast blow PLC end) |
| Fixing mode | By clips 35 mm symmetrical DIN rail) By screws solid plate with fixing kit) |
| Maximum supply current | 1 A |
| Voltage drop on power supply fuse | 0.3 V |
| [Ui] rated insulation voltage | 2000 V terminals/mounting rails 300 V coil circuit/contact circuits IEC 60947-1 |
| [Uimp] rated impulse withstand voltage | 2.5 kV |
| Installation category | II IEC 60664-1 |
| Tightening torque | 5.31 lbf.in (0.6 N.m) flat Ø 3.5 mm |
| Net Weight | 2.87 lb(US) (1.3 kg) |

Environment

| | |
|---------------------------------------|---|
| Product Certifications | UL CSA BV DNV GL LROS (Lloyds register of shipping) EAC |
| IP degree of protection | IP2x conforming to IEC 60529 |
| Resistance to incandescent wire | 1382 °F (750 °C) IEC 60695-2-11 |
| Shock resistance | 15 gn 11 ms IEC 60068-2-27 |
| Vibration resistance | 2 gn 10...150 Hz)IEC 60068-2-6 |
| Resistance to electrostatic discharge | 4 kV contact) level 3 IEC 61000-4-2 8 kV air) level 3 IEC 61000-4-2 |
| Resistance to radiated fields | 9.14 V/m (10 V/m) 26000000...1000000000 Hz)IEC 61000-4-3 level 3 |
| Resistance to fast transients | 2 kV level 3 IEC 61000-4-4 |
| Ambient air temperature for operation | 23...140 °F (-5...60 °C) IEC 61131-2 |
| Ambient air temperature for storage | -40...176 °F (-40...80 °C) IEC 61131-2 |
| Pollution degree | 2 IEC 60664-1 |

Ordering and shipping details

| | |
|-----------------------|-----------------------------------|
| Category | 22375 - INTERFACE MODULE(ABA,R,S) |
| Discount Schedule | CP2 |
| GTIN | 3389110705096 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 2.43 lb(US) (1.103 kg) |
| Returnability | Yes |
| Country of origin | LV |

Packing Units

| | |
|------------------------------|-------------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 3.39 in (8.6 cm) |
| Package 1 width | 3.94 in (10 cm) |
| Package 1 Length | 11.50 in (29.2 cm) |
| Unit Type of Package 2 | S03 |
| Number of Units in Package 2 | 6 |
| Package 2 Weight | 15.47 lb(US) (7.018 kg) |
| Package 2 Height | 11.81 in (30 cm) |
| Package 2 width | 11.81 in (30 cm) |
| Package 2 Length | 15.75 in (40 cm) |


Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Contractual warranty


| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

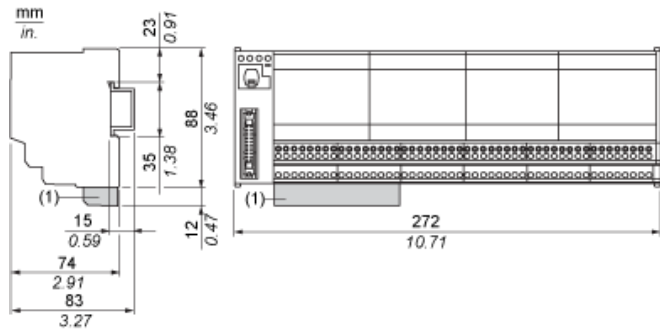


(1) ABE7BV10 / BV20, ABE7BV10E / BV20E


Mounting

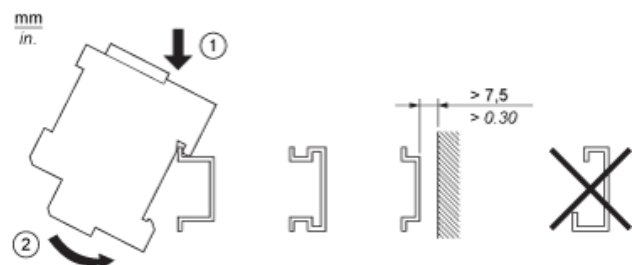

HE10 16 Channels

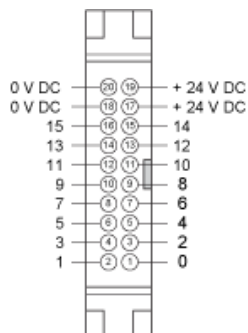

Wiring Diagram with Supplied Relays

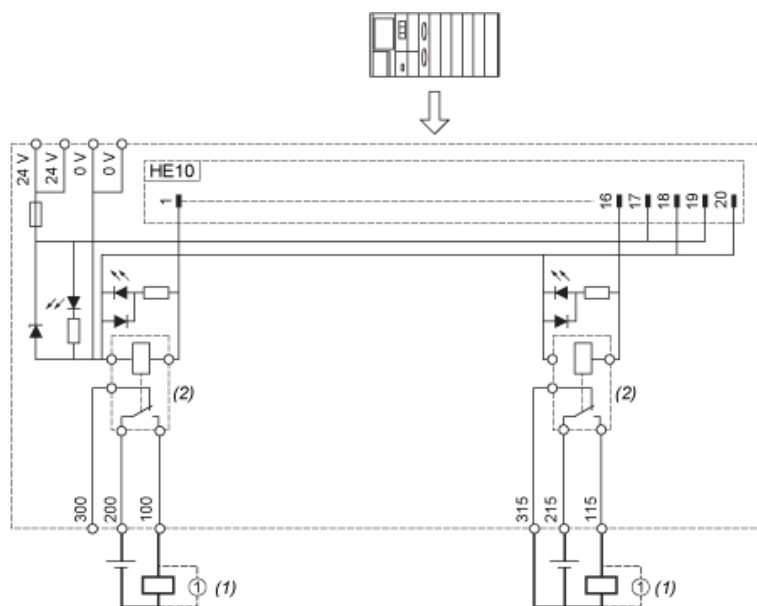


- (1) Inductive load
- (2) ABR7S33 (1 "OF" "DPDT") Ith = 10 A (supplied)

Wiring Diagram

Curves for Determining Cable Type and Length According to the Current


16-channel Sub-base

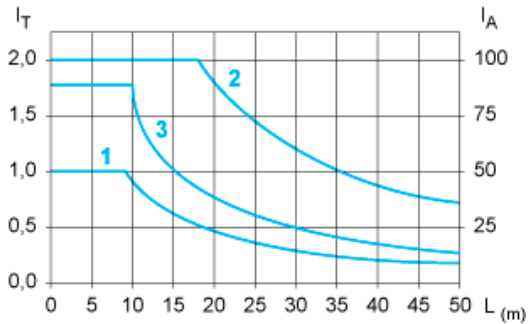

- L Cable length
- I_T Total current per sub base (A)
- I_A Average current per channel (mA)
- (1) TSXCDP••2 and ABFH20H••0 cables with c.s.a. 0.08 mm^2 (AWG 28).
- (2) TSXCDP••3 cables with c.s.a. 0.34 mm^2 (AWG 22).
- (3) Cables with c.s.a. 0.13 mm^2 (AWG 26).

The curves are given for a voltage drop of 1 V in the cable. For n volts tolerance, multiply the length determined from the graph by n.

Temperature Derating Curves

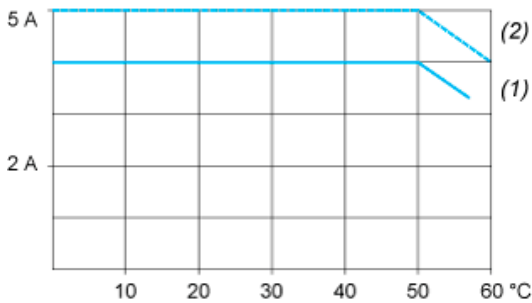


- (1) 100 % of channels used
- (2) 50 % of channels used

Electrical Durability (in Millions of Operating Cycles) Conforming to IEC 60947-5-1


DC Loads

DC12 curves

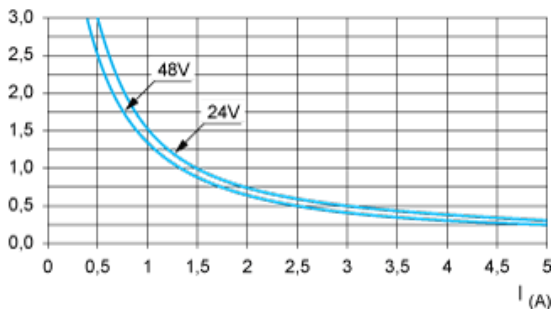

DC12control of resistive loads and of solid state loads isolated by optocoupler, $I/R \leq 1 \text{ ms}$.


DC13 curves

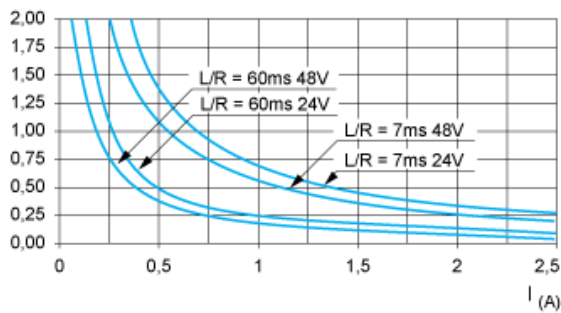

DC13 Switching electromagnets, $L/R \leq 2 \times (U_e \times I_e)$ in ms, U_e : rated operational voltage, I_e : rated operational current (with a protective diode on the load, DC12 curves must be used with a coefficient of 0.9 applied to the number in millions of operating cycles)


AC Loads

AC12 curves

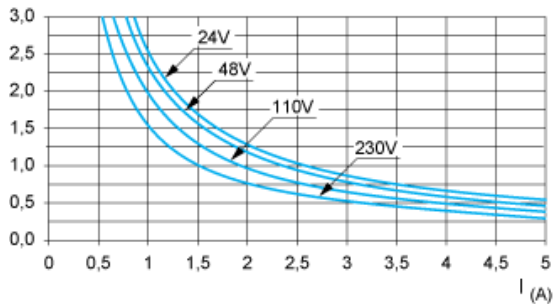


AC12 control of resistive loads and of solid state loads isolated by optocoupler, $\cos \phi \geq 0.9$.

AC14 curves

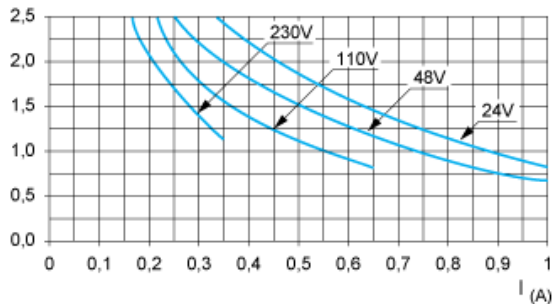

AC14 control of small electromagnetic loads ≤ 72 VA, make: $\cos \phi = 0.3$, break: $\cos \phi = 0.3$.

AC15 curves

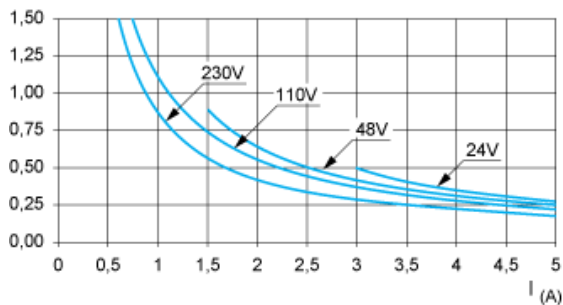

AC15 control of electromagnetic loads > 72 VA, make: $\cos \phi = 0.7$, break: $\cos \phi = 0.4$.