


## AB-L29D06Wxx4N2

### Features:


- DC Linear light engine
- Easily assembly light engine

### Applications:

- Cove light
- Ceiling light



**Outline Dimensions**

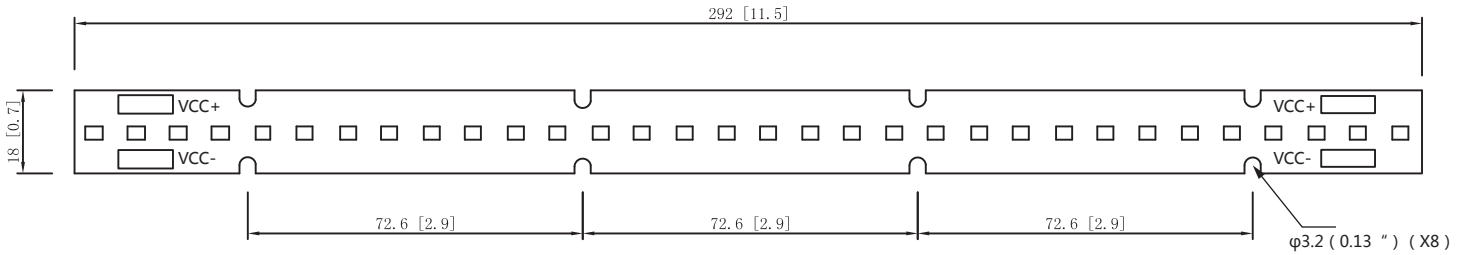

LED Qty:32ea

PCB thickness=1.0mm(0.04" )

Unit:mm(inch)

Units: mm

**Notes:**

1. 4 pcs terminal connectors were used for the serial connection
2. Thickness of PCB: 1.0mm
3. Tolerance of dimension: ±0.15mm

## Characteristics

### ■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Input Current	I <sub>in</sub>	600	mA
LED Junction Temperature	T <sub>J</sub>	115	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ 100°C	°C
Operation Temperature	T <sub>opr</sub>	-40 ~ 45°C	°C

- Proper current rating must be observed to maintain junction temperature below maximum at all time. For this product, we suggest to keep the Temperature of TC point under 75°C, and the temperature of Top IC surface under 115°C. After passing the maximum temperature of IC, the rating current will be lower automatically for protecting the whole circuit.

### ■ Electrical Characteristics, Ta=25°C


Parameter	Symbol	Spec	Max.	Unit
Forward voltage	V <sub>f</sub>	24.4(typ.)		V <sub>dc</sub>
Input Current	I <sub>in</sub>	260	600	mA

### ■ Optical Characteristics (V<sub>in</sub>=120V), Ta=25°C


Model name	Color Temp	Spec Luminous Flux		Max Luminous Flux		CRI
	(K)	Current	lumen	Current	lumen	
AB-L29D06W304N2	3000	260	1000	600	1800	>80
AB-L29D06W354N2	3500	260	1000	600	1800	>80
AB-L29D06W404N2	4000	260	1070	600	1920	>80
AB-L29D06W504N2	5000	260	1070	600	1920	>80





- Correlated color Temperature is derived from the CIE 1931 Chromaticity diagram.
- The luminous flux tolerance is ± 10%.
- This CRI value tolerance is ± 2.
- Calibration accuracy of CIE<sub>x</sub> and CIE<sub>y</sub> : ±0.007 ;
- Calibration error CCT 3000K ±175K; 4000K ±300K

■ **Relative Spectrum of Emission (Ta=25°C)**

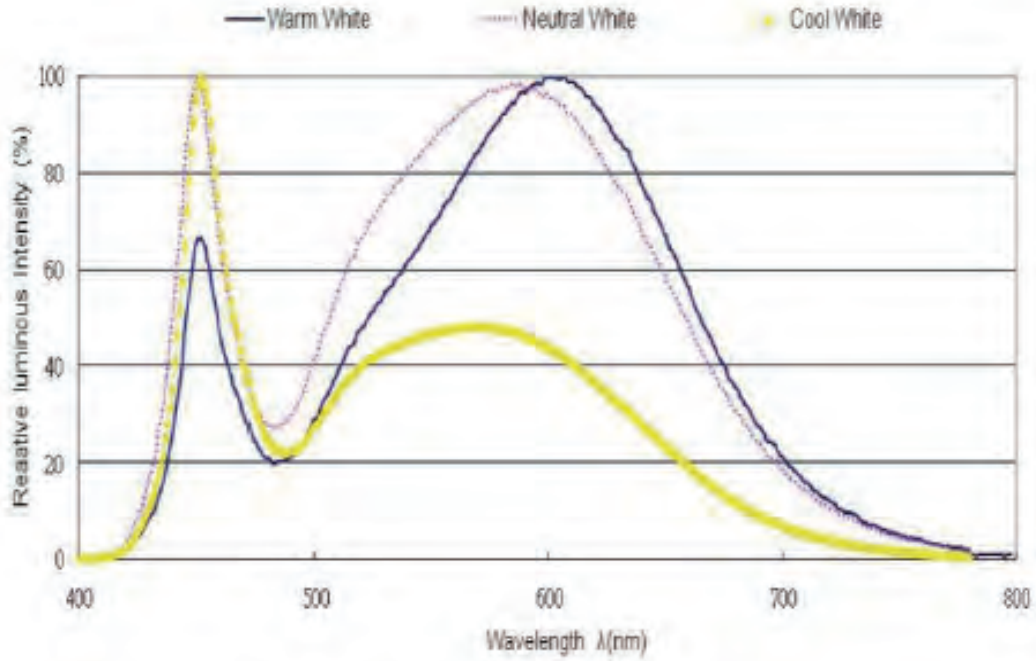


■ **Radiation Pattern**

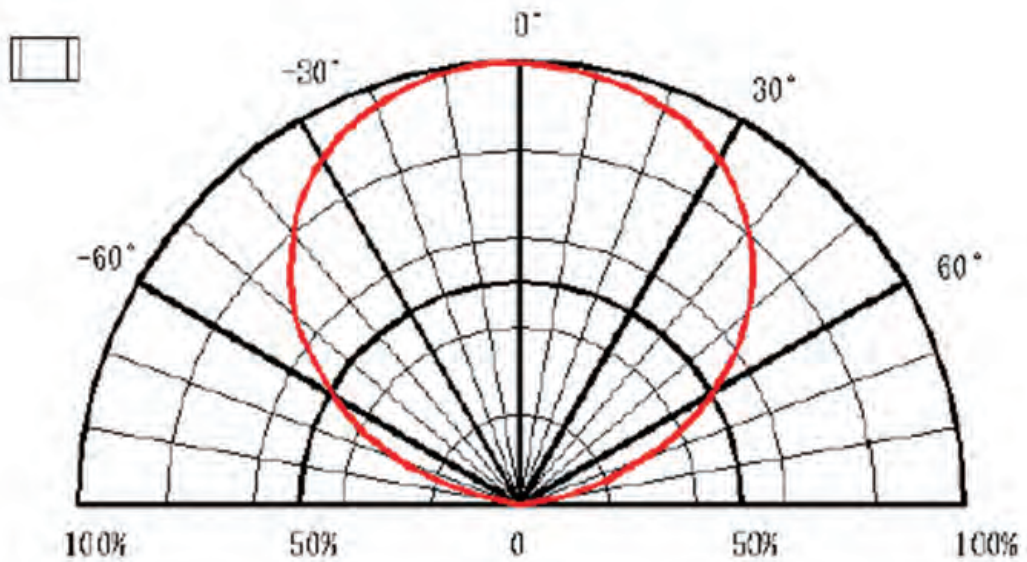

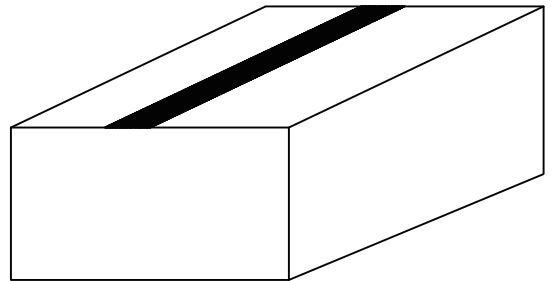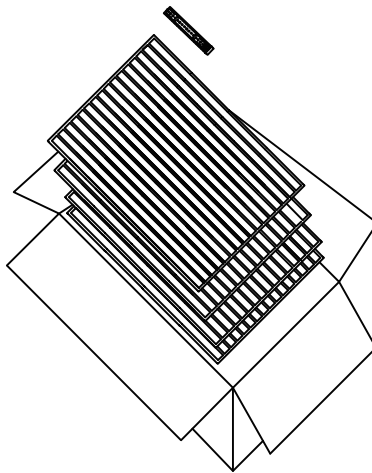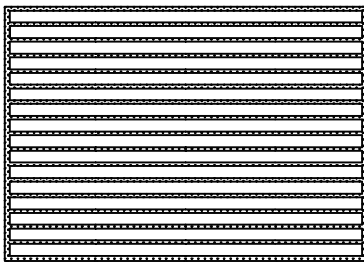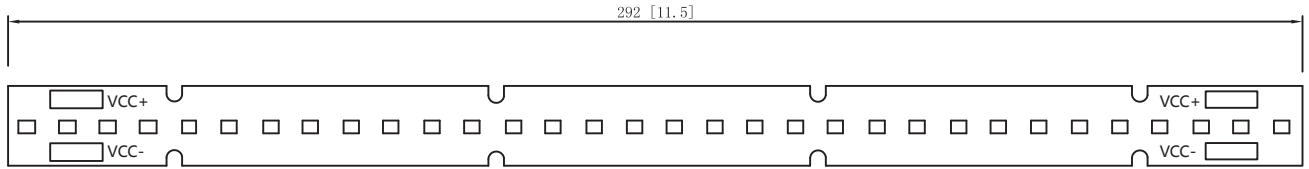


Model	Part number	box(pcs)	Ret Weight/box	Gross Weight/box
1	AB-L29D06Wxx4N2	250	4.8	5.8

**Chromaticity Coordinate Groups** <sup>5) page 24</sup>  
**Farbortgruppen** <sup>5) Seite 24</sup>

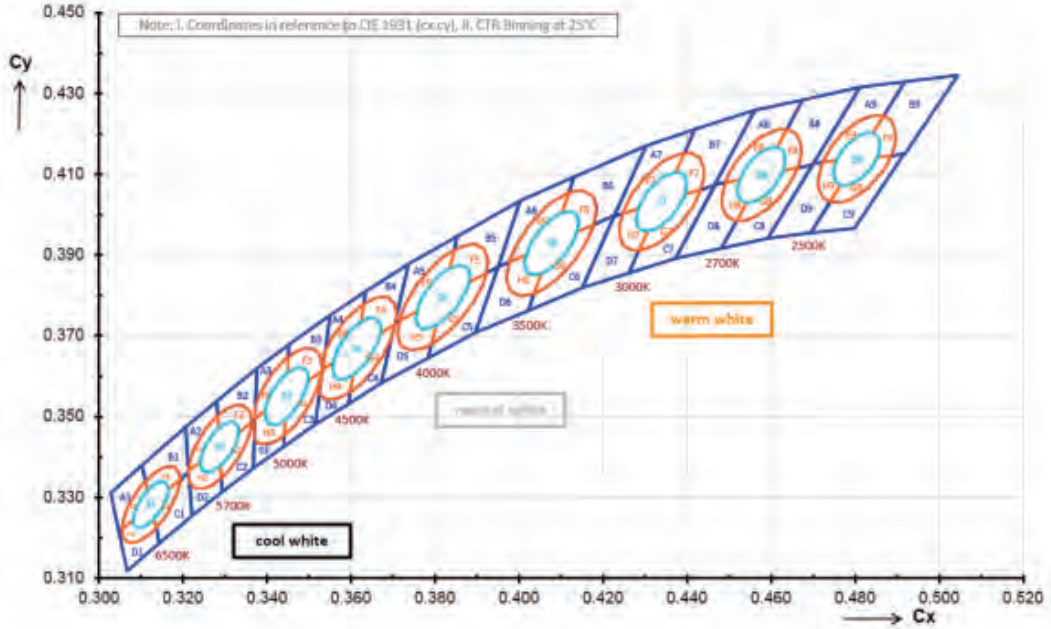

**Relative Spectral Emission -  $V(\lambda)$  = Standard eye response curve** <sup>6) page 24</sup>  
**Relative spektrale Emission -  $V(\lambda)$  = spektrale Augenempfindlichkeit** <sup>6) Seite 24</sup>  
 $\Phi_{rel} = f(\lambda)$ ;  $T_J = 25^\circ\text{C}$ ;  $I_F = 60\text{ mA}$

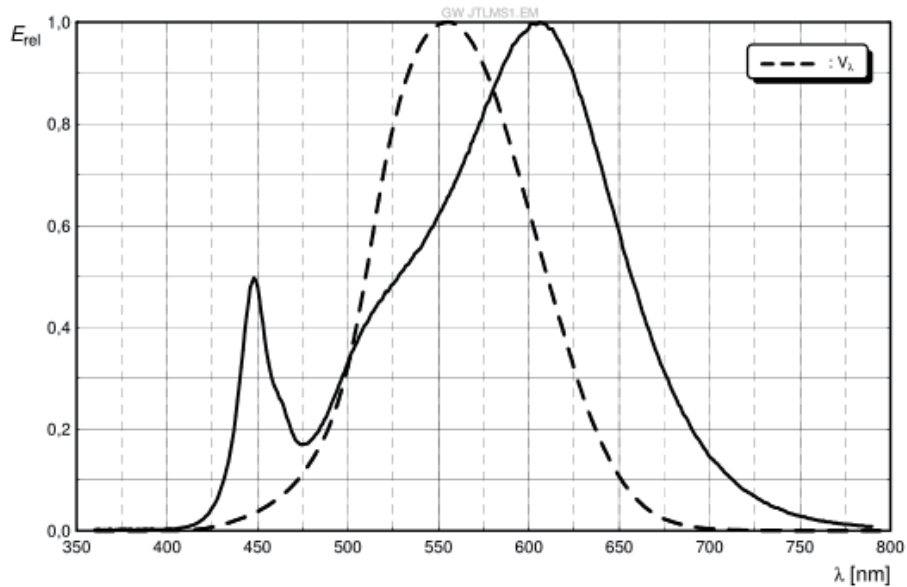

**Radiation Characteristics** 5) page 24

**Abstrahlcharakteristik** 6) Seite 24

$I_{rel} = f(\phi); T_J = 25\text{ }^\circ\text{C}$

