



Electrical specifications

Frequency Range: 1870~1890 MHz
Insertion loss: 2.0 dB max
Return loss: 14 dB min
Rejection @ 1840 MHz: 50 dBc min
Rejection @ 1920 MHz: 50 dBc min

Size Tolerance: As Below (+/- 0.3mm)


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA (F)
Dimensions: 104.7 x 38.1 x 25.4 mm

Environmental

Operating Temperature: -40° to +70° C
Storage Temperature: -50° to +90° C

Outline Drawing:

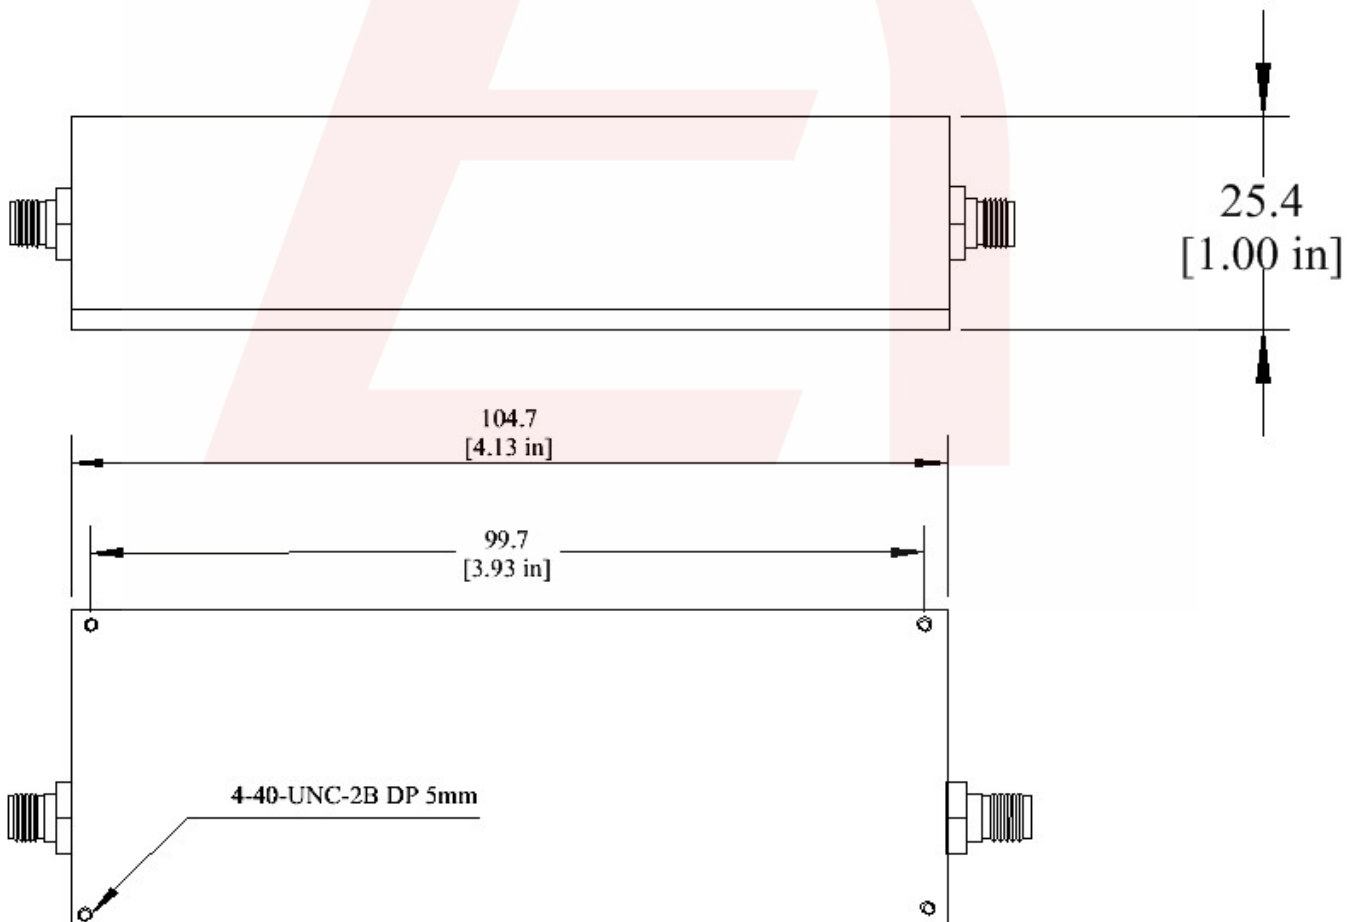

DS-B1221-03152015-Rev0



Response plot:

