



### Electrical specifications

**Passband:** 0-150 MHz

**Insertion Loss:**  $\leq 0.5$  dB

**Return Loss @ Passband:**  $\leq 15$  dB

**Rejection:**  $>50$  dB @ 300-1000 MHz

**Power Handling:** 200 W

### Mechanical

**Connectors:** N-Type (F)



**Dimensions:** 6" x 2" x 1.5" in

### Environmental

**Operating Temperature:** -40°C to +85°C

This product is RoHS compliant.

### Outline Drawing:

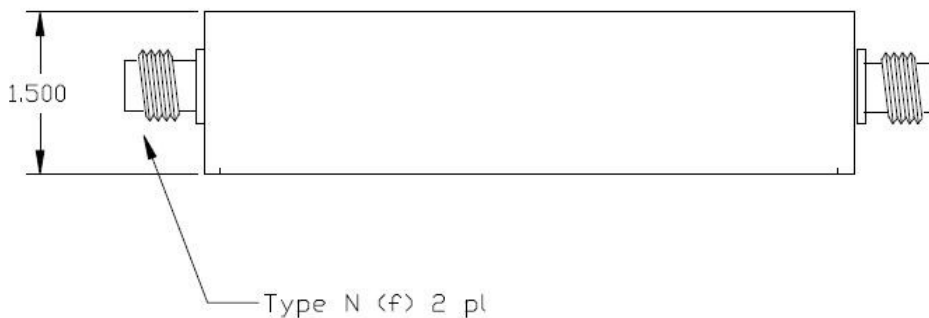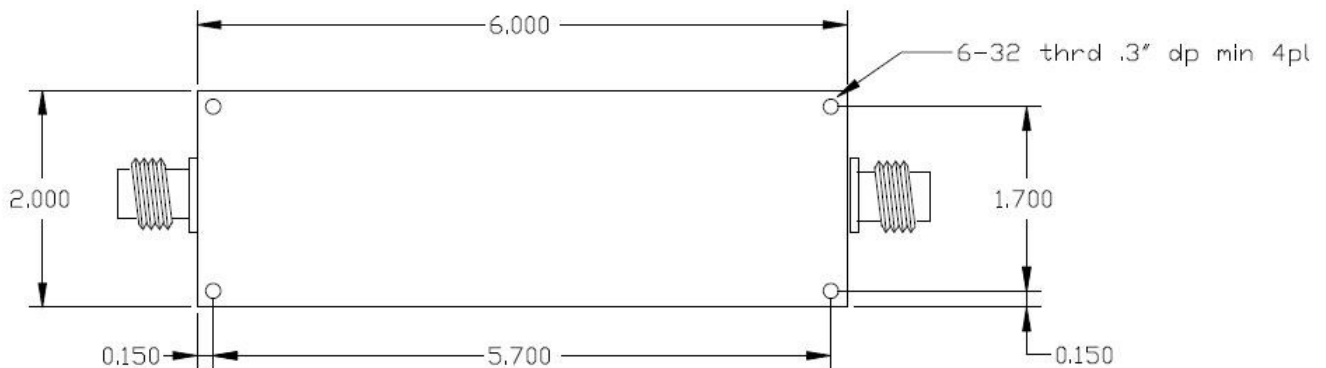



**Response Plot:**

