



Electrical Specifications

Frequency Range: 3400 ~ 10000 MHz
Insertion Loss: 1.5 dB Max
VSWR: 1.8:1 Max
Return Loss: 10 dB Min
Rejection: >40 dB @ DC ~ 2700 MHz
Power Handling: 20 Watts

Mechanical


Connector Type: SMA (F)
Dimensions: 1.65 x 1.10 x 0.393 Inches

Environmental

Operating Temperature: -30 to +70° C

Outline Drawing:

2 - SMA (F)

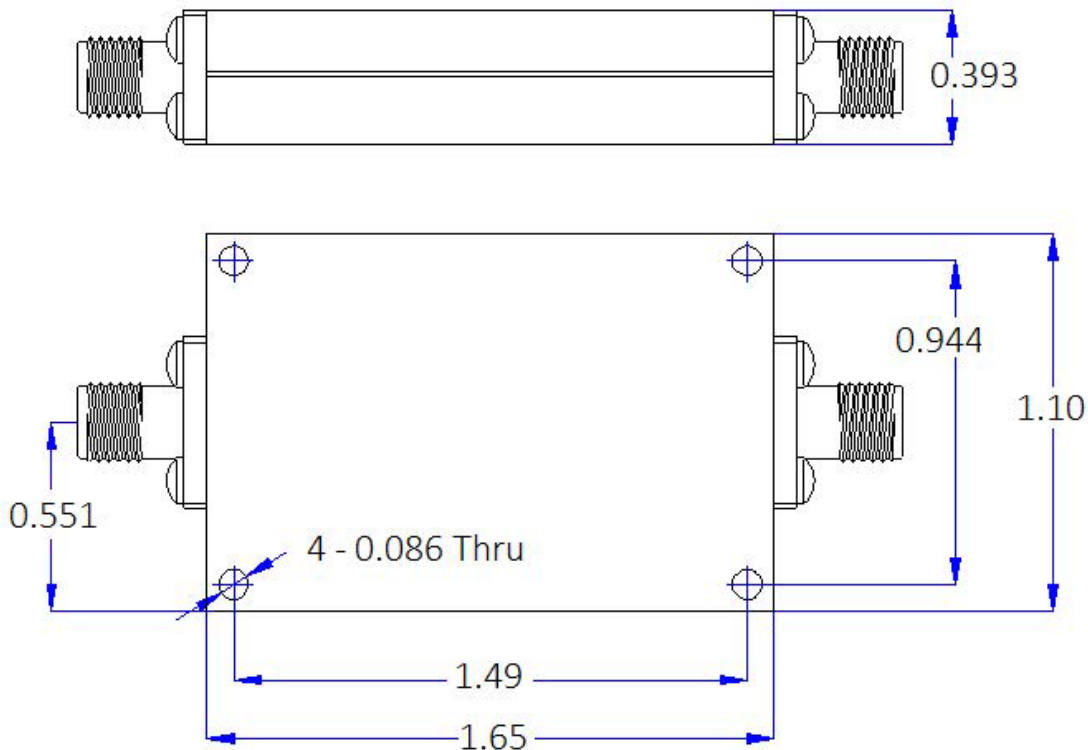



Response Plot:

