



### Electrical specifications

**Center Frequency:** 380 MHz  
**1dB Bandwidth:** 10 MHz  
**Passband:** 375-385 MHz  
**Insertion Loss:** 3 dB Max  
**Return Loss:** 14 dB Min  
**Ripple:** 0.1 dB  
**Rejection:** >60 dB @ 0-295 MHz  
                   >60 dB @ 456-1000 MHz  
**Power Handling:** 10 W


### Mechanical

**Dimensions:** 1.5 x 0.75 x 0.50 inches



### Environmental

**Operating Temperature:** -55 to +85° C  
**Shock:** 30 G. 11ms  
**Vibration:** 10 G. 5 to 1000 Hz

### Outline Drawing:

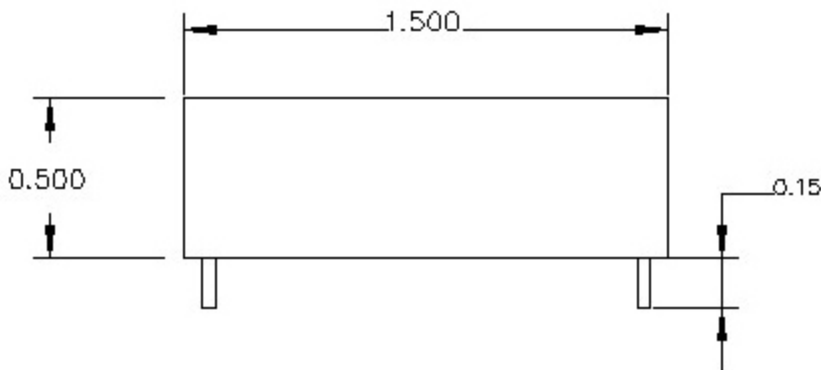

IN/OUT pin 0.02" dia, GND pin 0.04" dia

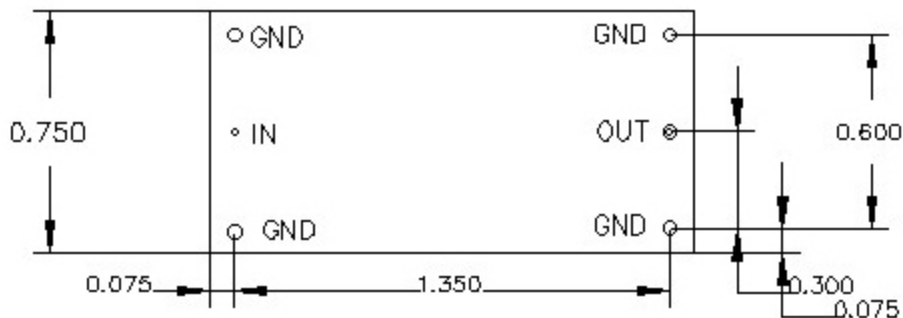

DWG 986887