



Electrical Specifications

Pass Band: 3 dB Nominal
1 dB 66-74 MHz
Ripple: 1 dB @ 66-74 MHz
Insertion Loss: 3.8 dB at Fo
VSWR: 1.50:1 @ 66-74 MHz
Stopbands: 55 dB (60 dB goal) @ 59.5-60 MHz
40 dB @ DC-59.5 MHz
39 dB @ 80-210 MHz
Phase Linearity: $\pm 8^\circ$ ($\pm 4^\circ$ goal) Max @ 66-74 MHz


Mechanical

Connector Type: RF Pins
Dimensions: 1.50 x 0.50 x 0.40 Inches

Environmental

Operating Temperature: -30 to +85° C
Storage Temperature: -40 to +95° C
Shock: 20 G. 11 ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

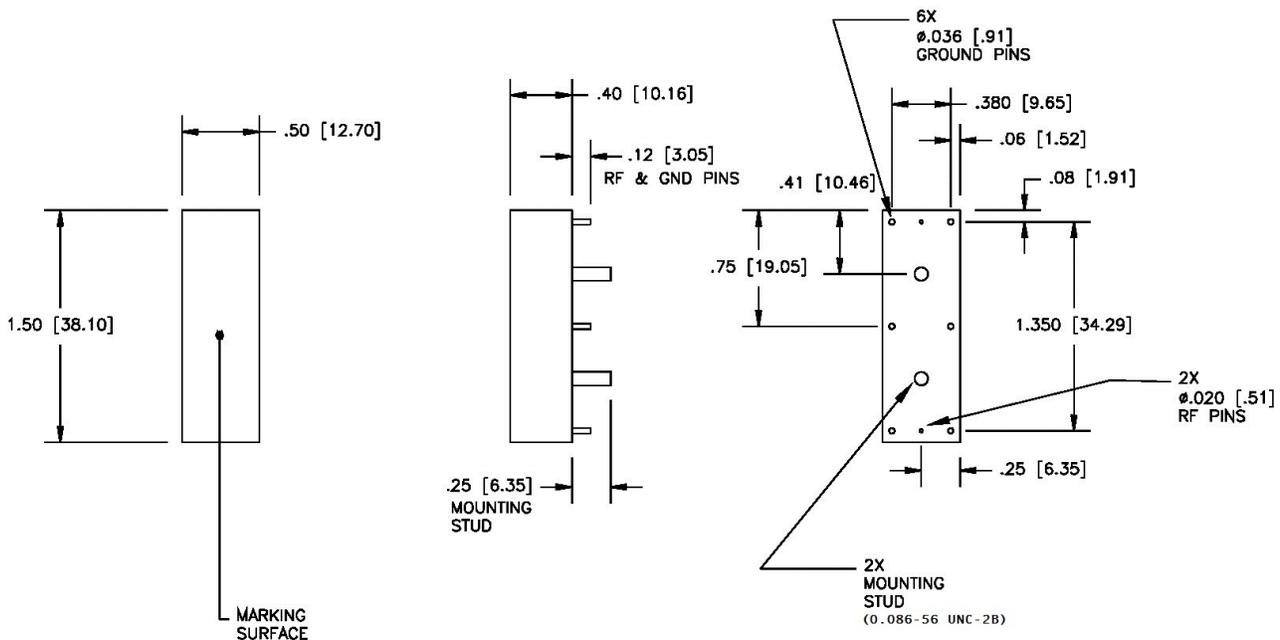

2 decimal places: +/- 0.01 inches [+/- 0.3mm]
3 decimal places: +/- 0.005 inches [+/- 0.13mm]
Angles: +/- 1 Deg.

When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.




Response Plot:

A486.lad

FEB 18, 2015

Attenuation/Return Loss

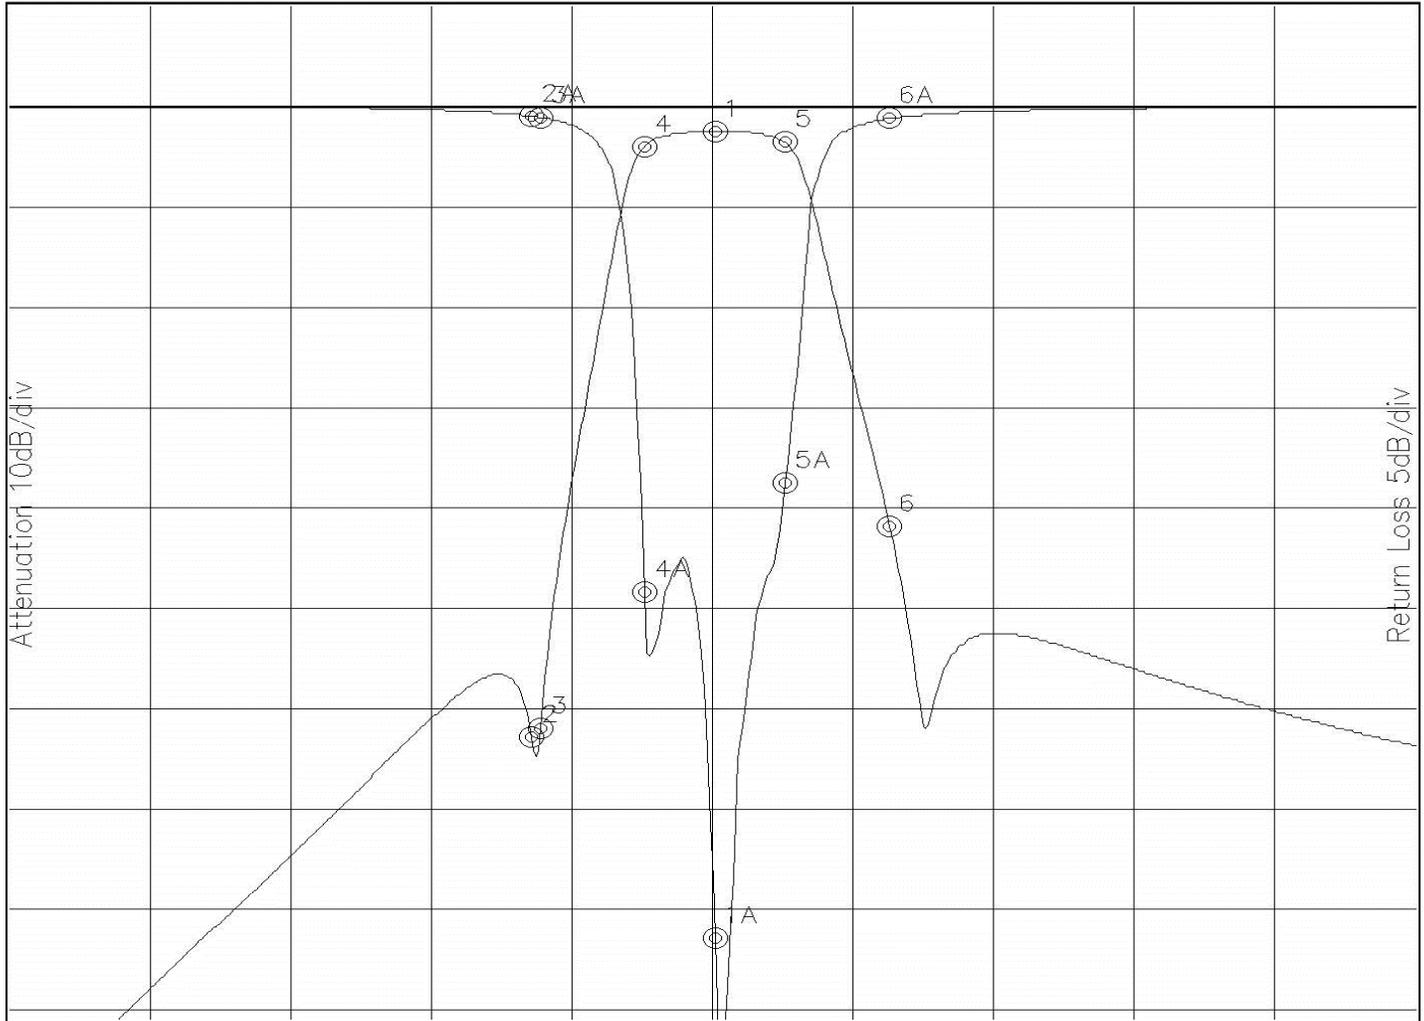

Attenuation Start: 30.0MHz Stop: 110.0MHz

Return Loss Start: 30.0MHz Stop: 110.0MHz

Marker 1 Freq 70.065MHz Atten -2.346dB
Marker 2 Freq 59.596MHz Atten -62.615dB
Marker 3 Freq 60.113MHz Atten -61.804dB
Marker 4 Freq 66.058MHz Atten -3.839dB
Marker 5 Freq 74.071MHz Atten -3.549dB
Marker 6 Freq 80.016MHz Atten -41.698dB

Marker 1A Freq 70.065MHz Ret Loss -41.299dB
Marker 2A Freq 59.596MHz Ret Loss -0.446dB
Marker 3A Freq 60.113MHz Ret Loss -0.510dB
Marker 4A Freq 66.058MHz Ret Loss -24.090dB
Marker 5A Freq 74.071MHz Ret Loss -18.662dB
Marker 6A Freq 80.016MHz Ret Loss -0.558dB

Note: This is a simulated response plot. Actual performance might differ.




Phase Linearity:

A486.lad

FEB 18, 2015

Phase

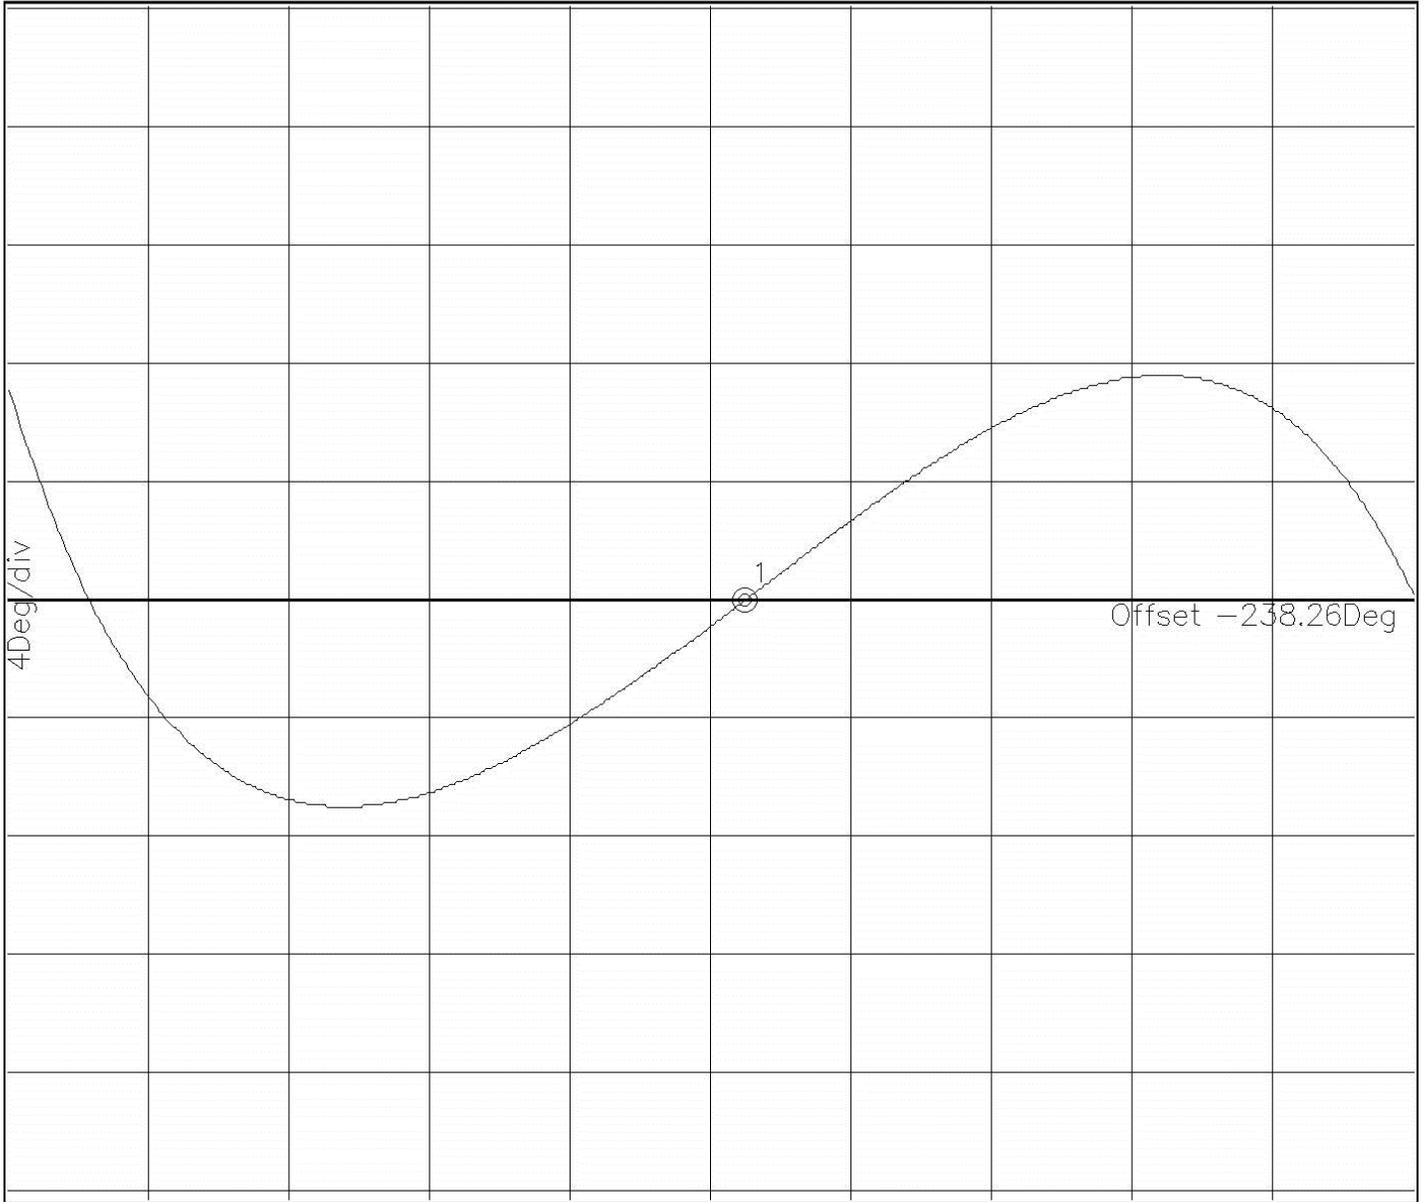

Phase Start: 66.0MHz Stop: 74.0MHz

Marker 1 Freq 70.187MHz Phase -0.036Deg