



**Electrical specifications**

**Center Frequency:** 53.108 MHz  
**3dB Bandwidth:** 100 KHz Min  
**Insertion Loss:** 4.5 dB Max  
**Attenuation:** 53 MHz  
                   53.2 MHz  
**Pass Band Ripple:** 1 dB Max  
**Input Power:** 1dB Max  
**Impedance:** 50Ohms


**Mechanical**

**Mounting Method:** SMT  
**Dimensions:** 1.25" x .75" x .55"

**Environmental**

**Operating Temperature:** -20 to +50 deg.C

**Outline Drawing:**

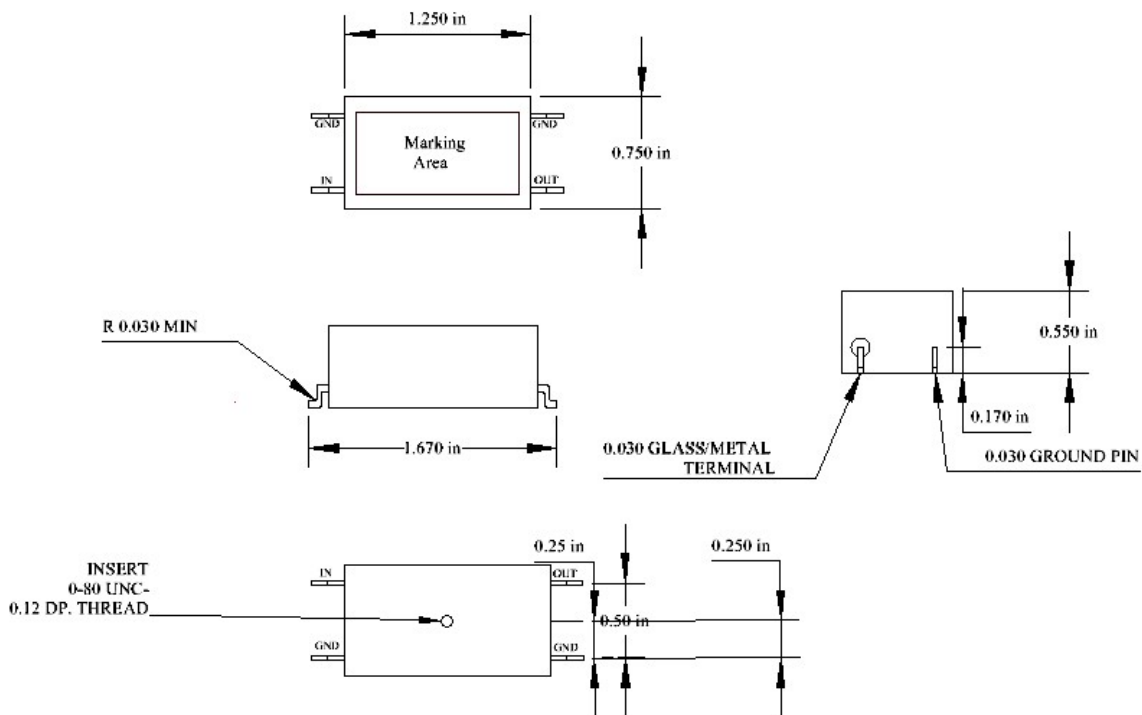



### Response Plot:

