


# APHC-287-10-13-E

## Peltier Cooler Module - High Temperature Cycling

### Data Sheet

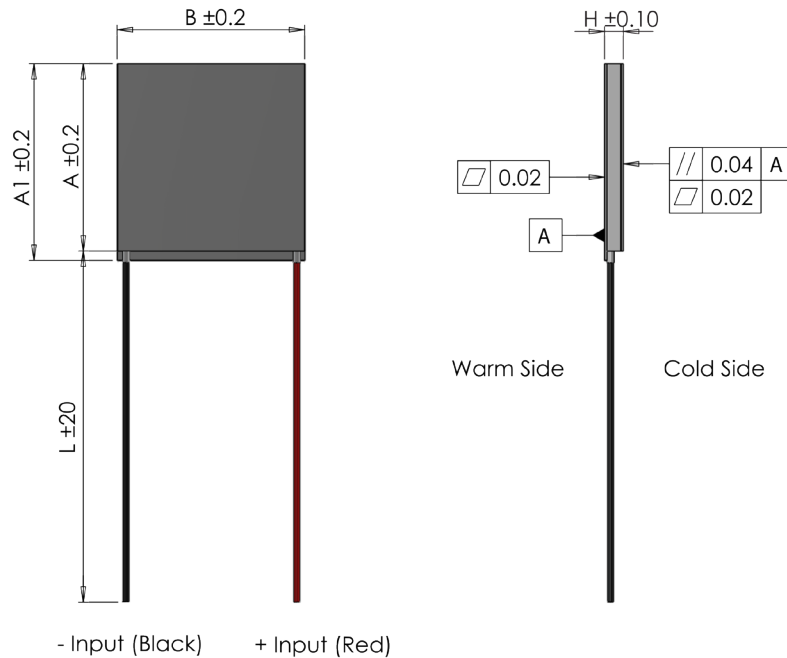

|                     |        |      |
|---------------------|--------|------|
| $I_{max}$           | [A]    | 3.6  |
| $V_{max}$           | [Vdc]  | 36.1 |
| $P_c \text{ max}$   | [W]    | 78   |
| $\Delta T_{max}$    | [°C]   | 72   |
| ACR                 | [Ohms] | 7.7  |
| Max. hot side temp. | [°C]   | 180  |
| A                   | [mm]   | 40   |
| A1                  | [mm]   | 40   |
| B                   | [mm]   | 40   |
| H                   | [mm]   | 3.6  |





- (At hot side temperature  $T_h = 27^\circ\text{C} / 300\text{K}$ , under dry  $\text{N}_2$ )
- $P_c \text{ max}$  = Cooling power at  $\Delta T = 0$  and  $I = I_{max}$
- $\Delta T_{max}$  = Temperature difference at  $I = I_{max}$  and  $P_c = 0$
- Max mounting pressure: 1.5MPa
- Wires: PFA, Teflon, 600V, +250°C(Unstripped)

### Features





- Solid-state reliability
- Suitable for temperature cycling applications
- High integrity nickel diffusion barriers on elements
- High strength for rugged environments
- Porched style for enhanced leadwire strength
- Epoxy sealed



### Data Sheet - At hot side temperature 25°C

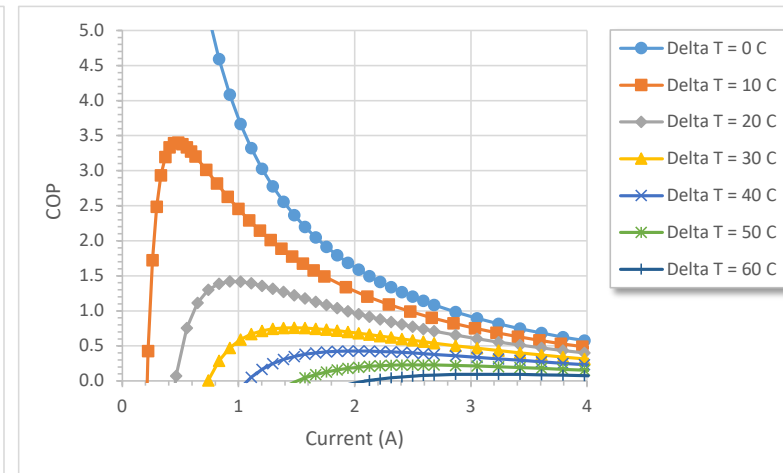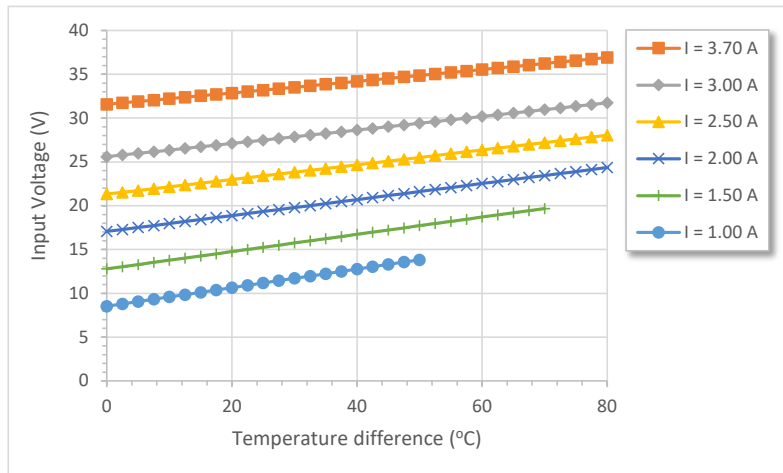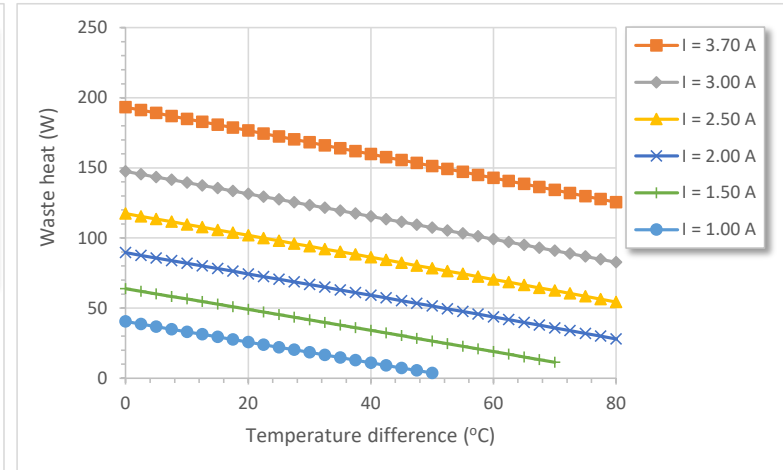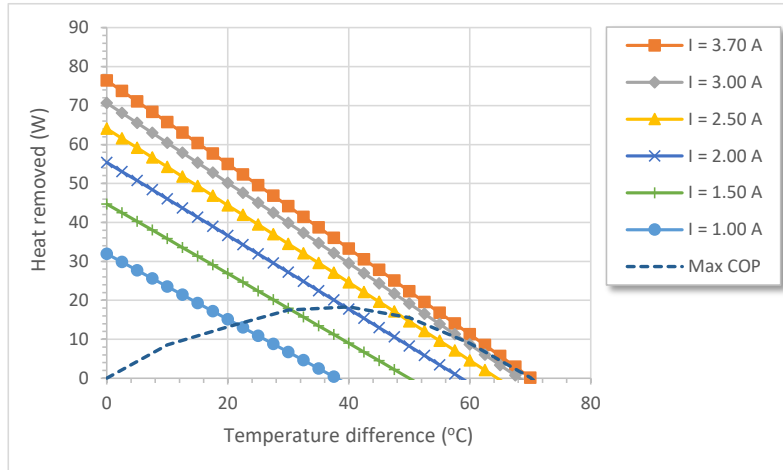

### Data Sheet - At hot side temperature 50°C

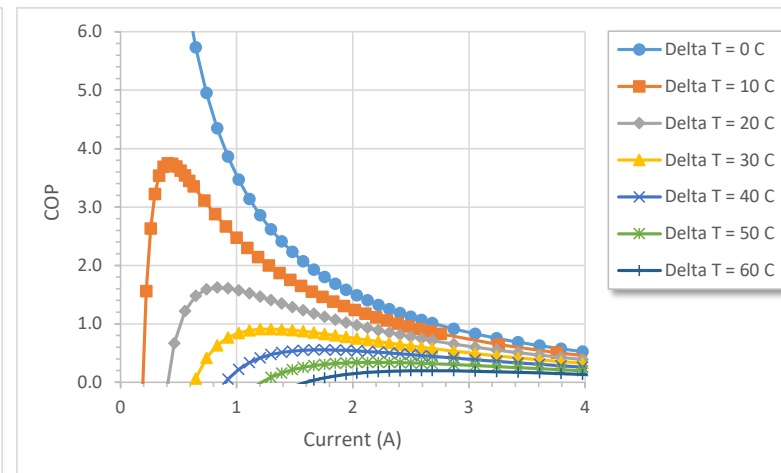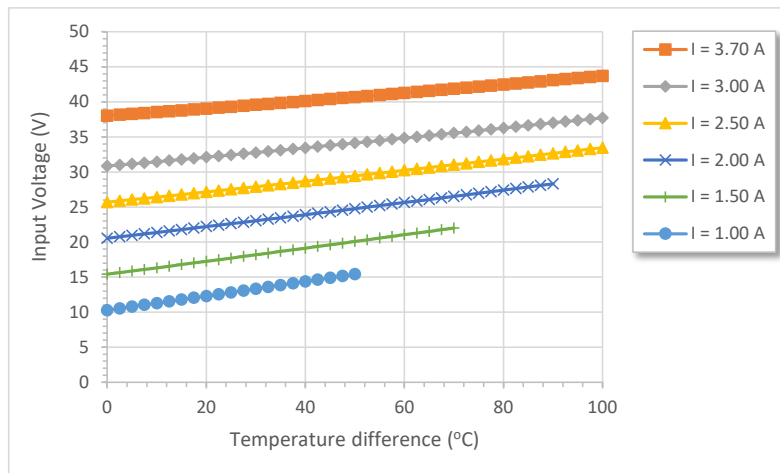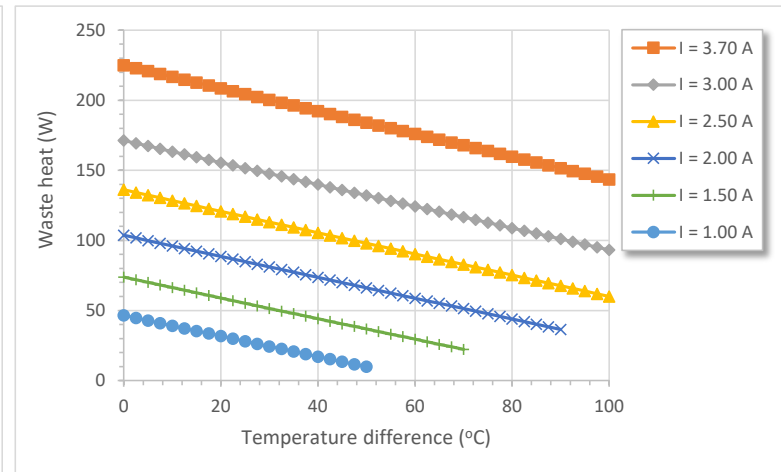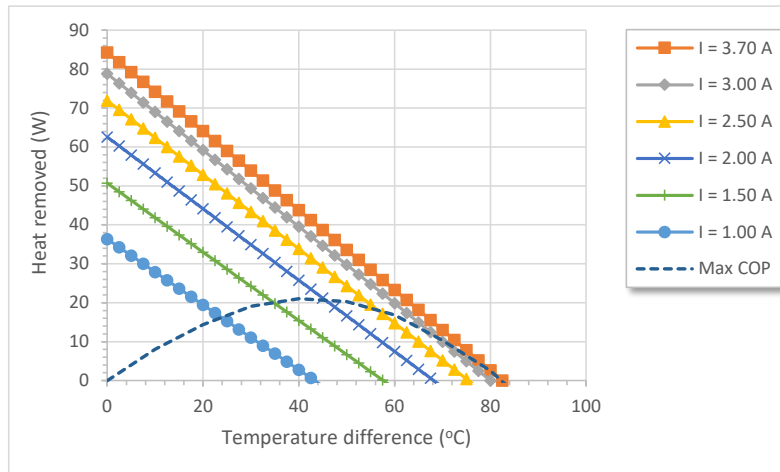

### Data Sheet - At hot side temperature 75°C

